

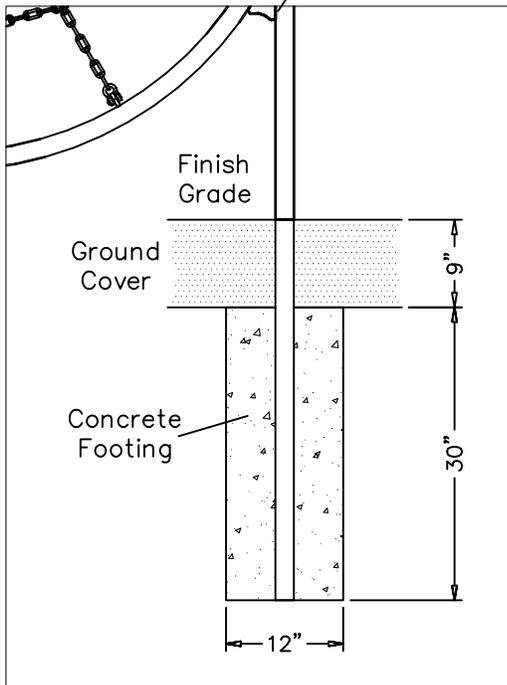


Assembly View

See Half Wall assembly page R5-1309.

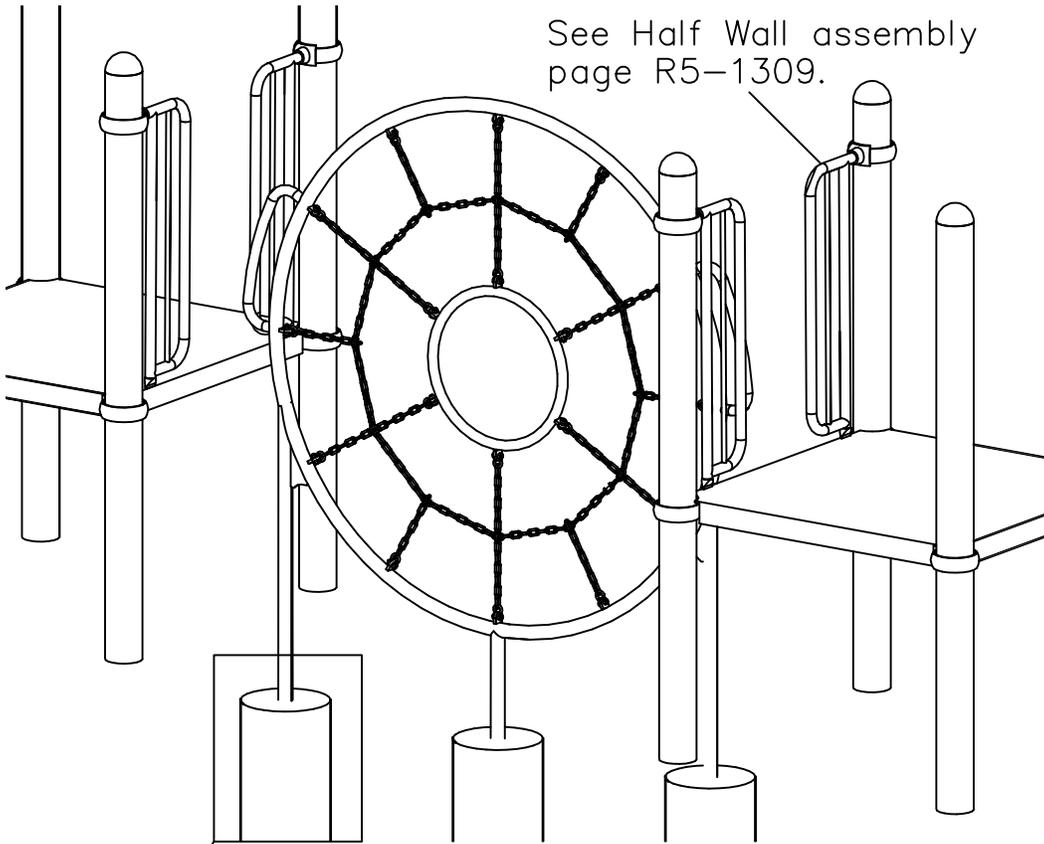

Plan View

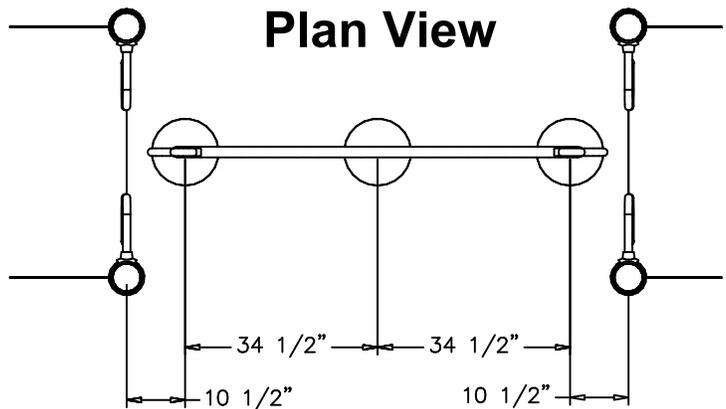

Parts List

<u>QTY.</u>	<u>DESCRIPTION</u>	<u>PART #</u>
1	Web Link	FS-1517

Installation

NOTE:

Refer to page R5-1309 Half Wall assembly to install Half Walls.

Step 1.

Dig a 12" footing, 30" deep, approx. 10-1/2" away from the center of the face of the deck. See Plan View

Step 2.

Check to ensure that the Web Link is leveled and plumbed.

Step 3.

Pour the concrete footing. Allow 72 hours curing time before use.

Specifications

WEB LINK:

Shall have 2" standard pipe with PVC-coated chain attached within. Entire climber assembly is powder coated after fabrication.

HARDWARE:

Shall be zinc/nickel plated, galvanized or stainless steel as required to resist rust and corrosion.

Maintenance

Periodically tighten all screws, bolts and nuts.
A periodic inspection of all parts is necessary.
If a part is broken or worn, replace immediately.

