


**IMPORTANT NOTES: Read First**

- (A) Use liquid thread lock (such as Loctite®) with all threaded hardware. **Important:** Liquid thread lock (prior to curing) helps to eliminate the common problem of "thread seizure" in stainless steel hardware by serving as a lubricant during assembly.
- (B) Fillers must be installed where there is a space between 3-1/2" and 9" to prevent head entrapments.


**FIGURE 1**  
Vertical Deck Filler

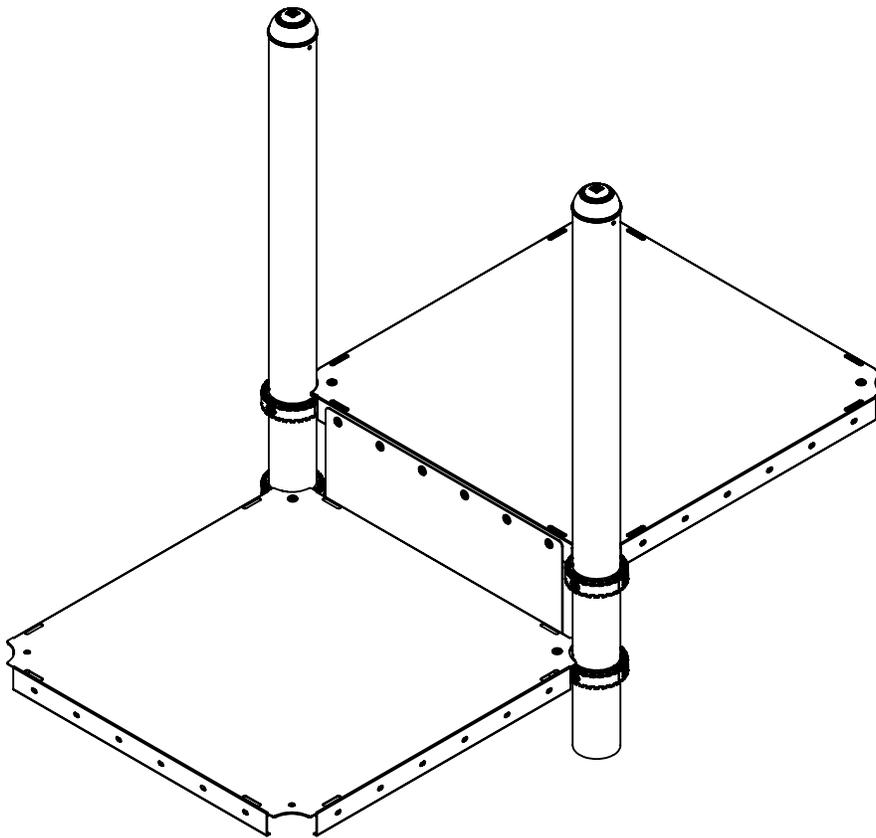

**NOTE:** 12" Vertical Deck Filler shown on R5 deck assembly. other configurations may vary slightly, but do not affect the assembly.

## Step 1


Attach the corresponding Vertical Deck Filler to the decks as shown in Figure 2 and 3. (See Note A)

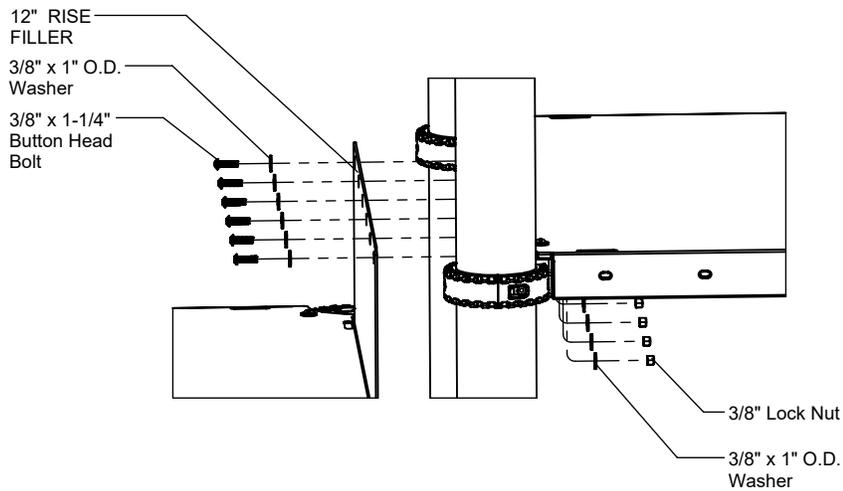

**Figure 2**

## Step 2

Fully tighten all fasteners according to the "TIGHTENING TORQUE FOR HARDWARE" section of the Installation Manual.

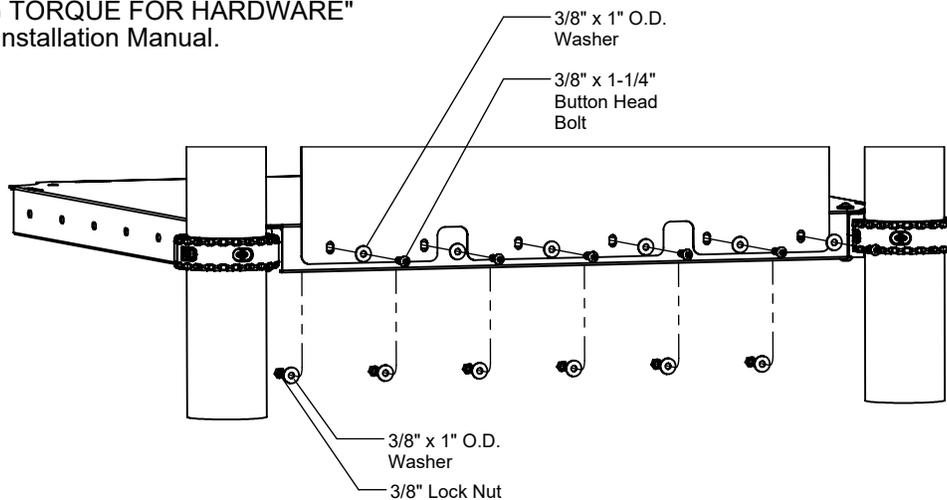

**Figure 3**

### Parts List

**VERTICAL DECK FILLERS:**

Shall be fabricated from .120" sheet aluminum. The Vertical Deck Fillers have a multi-stage baked-on powder coat finish.

**HARDWARE:**

Shall be stainless steel, zinc/nickel plated or galvanized as required to resist rust and corrosion.

### Specifications

Part #	DESCRIPTION	QTY.
Varies	Vertical Deck Filler	1
9333002	Washer Flat 3/8" x 1" O.D. x .100" thick	24
9103062-TR	Bolt Button Head 3/8" x 1-1/4"	12
9413002	Nut Lock 3/8"	12

### Maintenance

Periodically tighten all screws, bolts and nuts. A periodic inspection of all parts is necessary. If a part is broken or worn, replace immediately. For general maintenance please refer to our Playground Maintenance Manual.

