


IMPORTANT NOTES: Read First

(A) Use liquid thread lock (such as Loctite®) with all threaded hardware. **Important:** Liquid thread lock (prior to curing) helps to eliminate the common problem of "thread seizure" in stainless steel hardware by serving as a lubricant during assembly.

(B) Refer to Installation Manual for R3.5-1600, R5-1602 and R5-1602-CAN Panel assembly or corresponding Theme Panel assembly instructions.

FIGURE 1
Counter Assembly

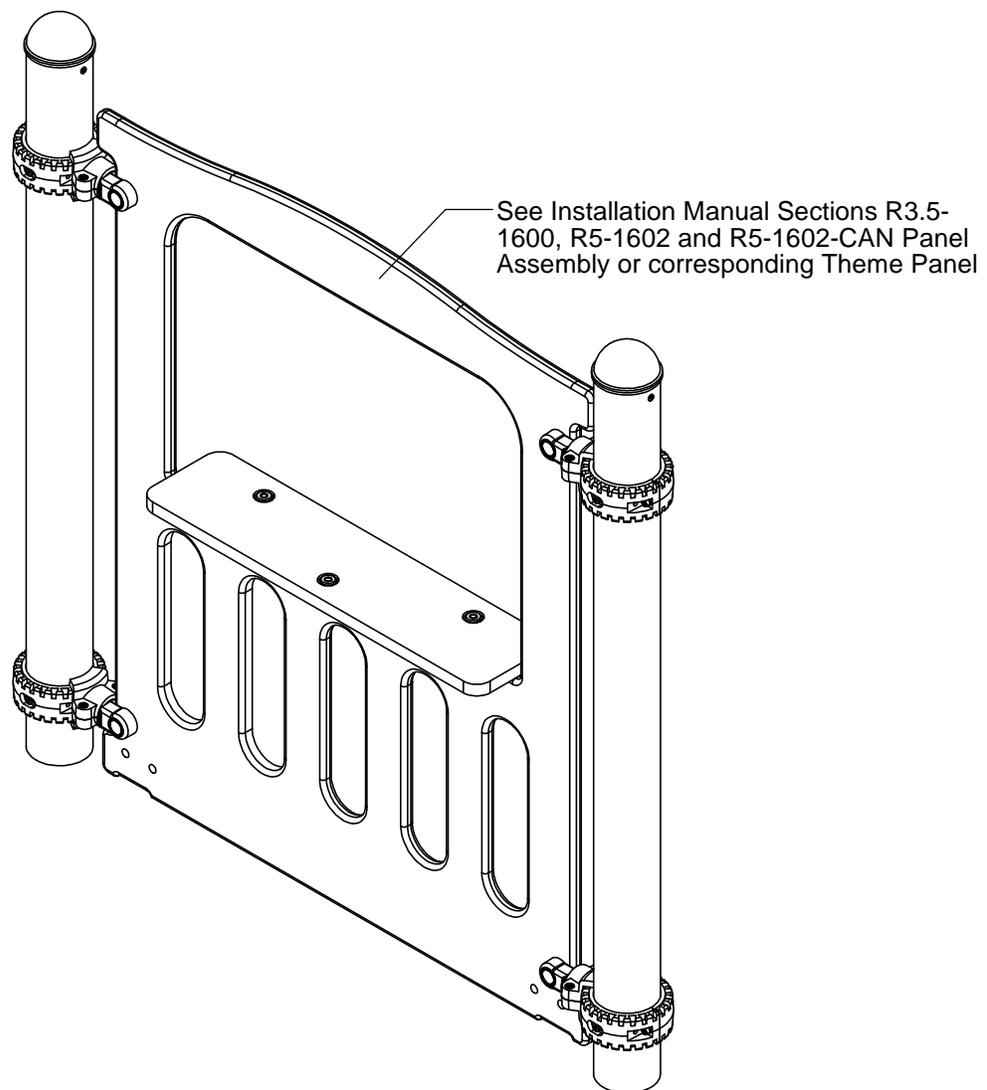

NOTE: R3.5 Store Panel shown.
Other panels may vary, but do not affect the Counter Assembly.

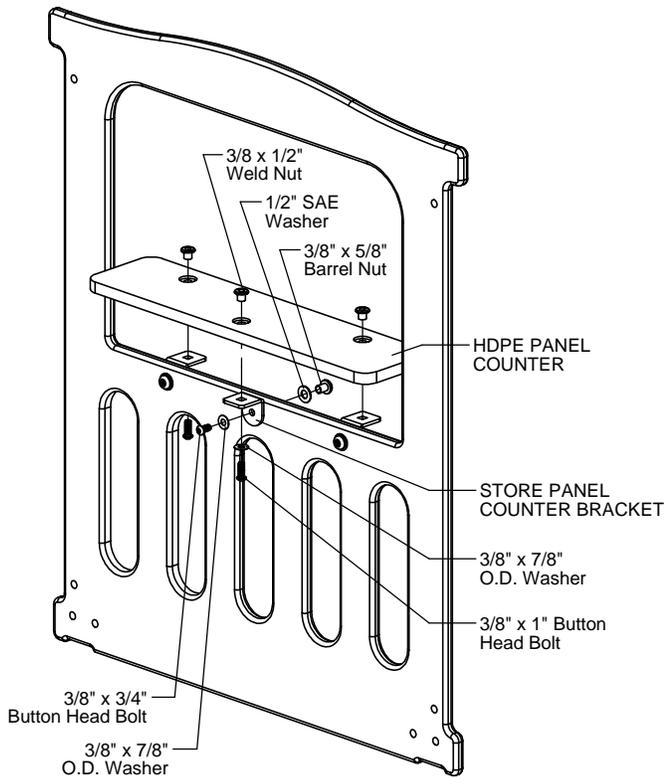


FIGURE 2

Step 1

Attach the HDPE Panel Counter to the Panel as shown in Figure 2. (See Note A)

Step 2

Fully tighten all fasteners according to the "TIGHTENING TORQUE FOR HARDWARE" section of the Installation Manual.

Specifications

HDPE PANEL COUNTER:

Shall be made from high density 3/4" thick hot extruded polyethylene sheet plastic specially formulated for optimum UV stability and color retention.

STORE PANEL COUNTER BRACKET:

Shall be precision laser cut and formed from 3/16" sheet steel. The Store Panel Counter Bracket has a multi-stage baked-on powder coat finish.

HARDWARE:

Shall be stainless steel, zinc/nickel plated or galvanized as required to resist rust and corrosion.

Parts List

| Part # | DESCRIPTION | QTY. |
|------------|------------------------------|------|
| BE-4285 | Store Panel Counter Bracket | 3 |
| Varies | HDPE Panel Counter | 1 |
| 9103032-TR | Bolt Button Head 3/8" x 3/4" | 3 |
| 9103052-TR | Bolt Button Head 3/8" x 1" | 3 |
| 9333042 | Washer Flat 3/8" x 7/8" O.D. | 6 |
| 9345002 | Washer Flat SAE 1/2" | 3 |
| 9443022-TR | Nut Barrel 3/8" x 5/8" BH | 3 |
| 9493012 | 3/8 x 1/2" Weld Nut | 3 |

Maintenance

Periodically tighten all screws, bolts and nuts. A periodic inspection of all parts is necessary. If a part is broken or worn, replace immediately. For general maintenance please refer to our Playground Maintenance Manual.