



### Assembly View

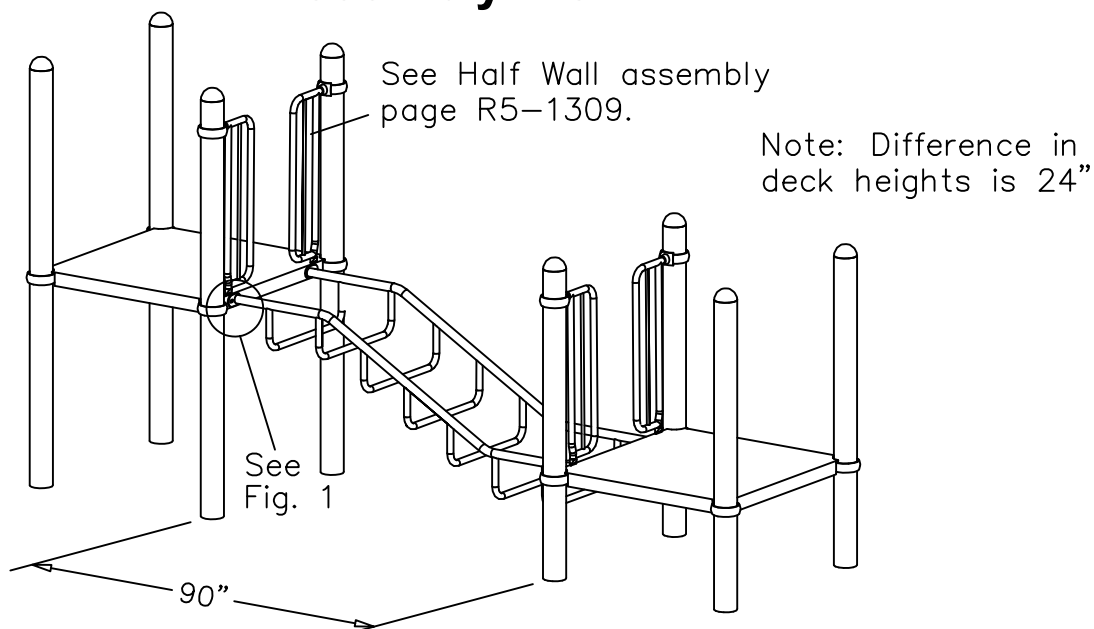

### Figure 1

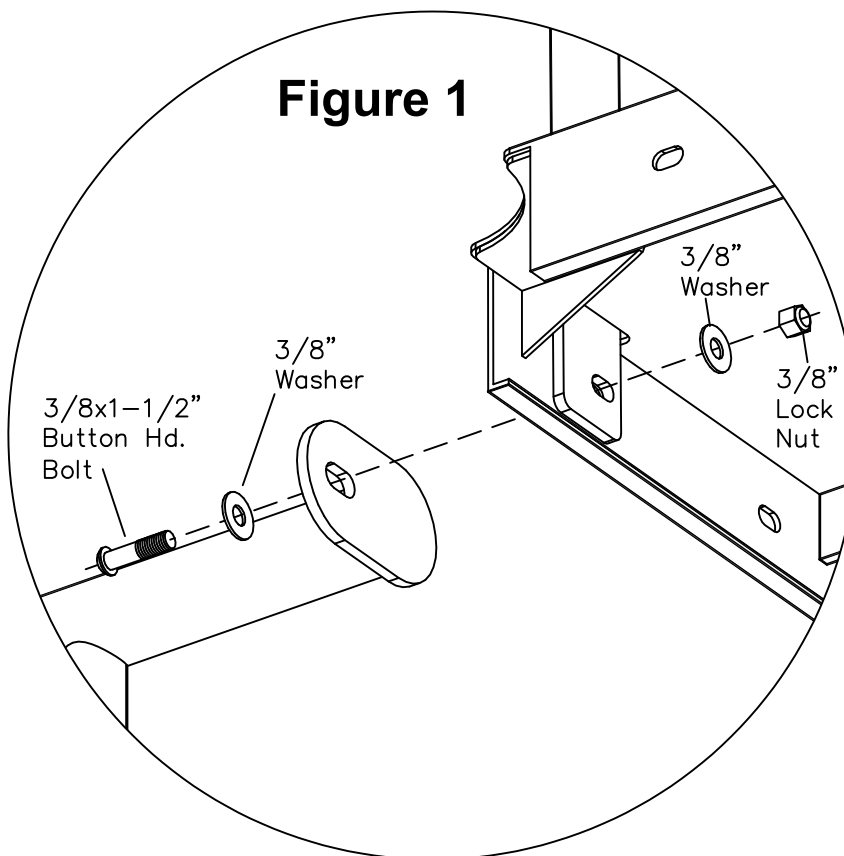

## Parts List

<u>QTY.</u>	<u>DESCRIPTION</u>	<u>PART #</u>
1	Inclined Loop Link (bridge)	FS-1508-R
4	3/8 x 1½" Button Hd. Bolts	9103072-TR
4	3/8" Lock Nuts	9413002
8	3/8" Washers	9333002

## Installation

**NOTES:**

(A) Refer to page R5- 1309 Half Wall assembly to install Half Walls.

(B) Refer to page R5- 09 Collar assembly to install post collars.

(C) Use liquid thread lock (such a Loctite) with all threaded hardware that does not include self-locking nuts.

**Step 1.**

Attach Loop Link to decks using the hardware as shown in Figure 1.

**Step 3.**

Fully tighten all hardware.

## Specifications

**INCLINED LOOP LINK:**

Shall have 1½" standard pipe side supports and 1" standard pipe loops. Loops are evenly spaced and welded to the side supports. Tabs are welded on to the end of each rail to provide attachment points. Entire welded assembly is powder coated after fabrication.

**HARDWARE:**

Shall be zinc/nickel plated, galvanized or stainless steel as required to resist rust and corrosion.

## Maintenance

Periodically tighten all screws, bolts and nuts.  
A periodic inspection of all parts is necessary.  
If a part is broken or worn, replace immediately.

