


IMPORTANT NOTES: Read First

(A) Use liquid thread lock (such as Loctite®) with all threaded hardware. **Important:** Liquid thread lock (prior to curing) helps to eliminate the common problem of "thread seizure" in stainless steel hardware by serving as a lubricant during assembly.

FIGURE 1
Small Tic-Tac-Toe Panel

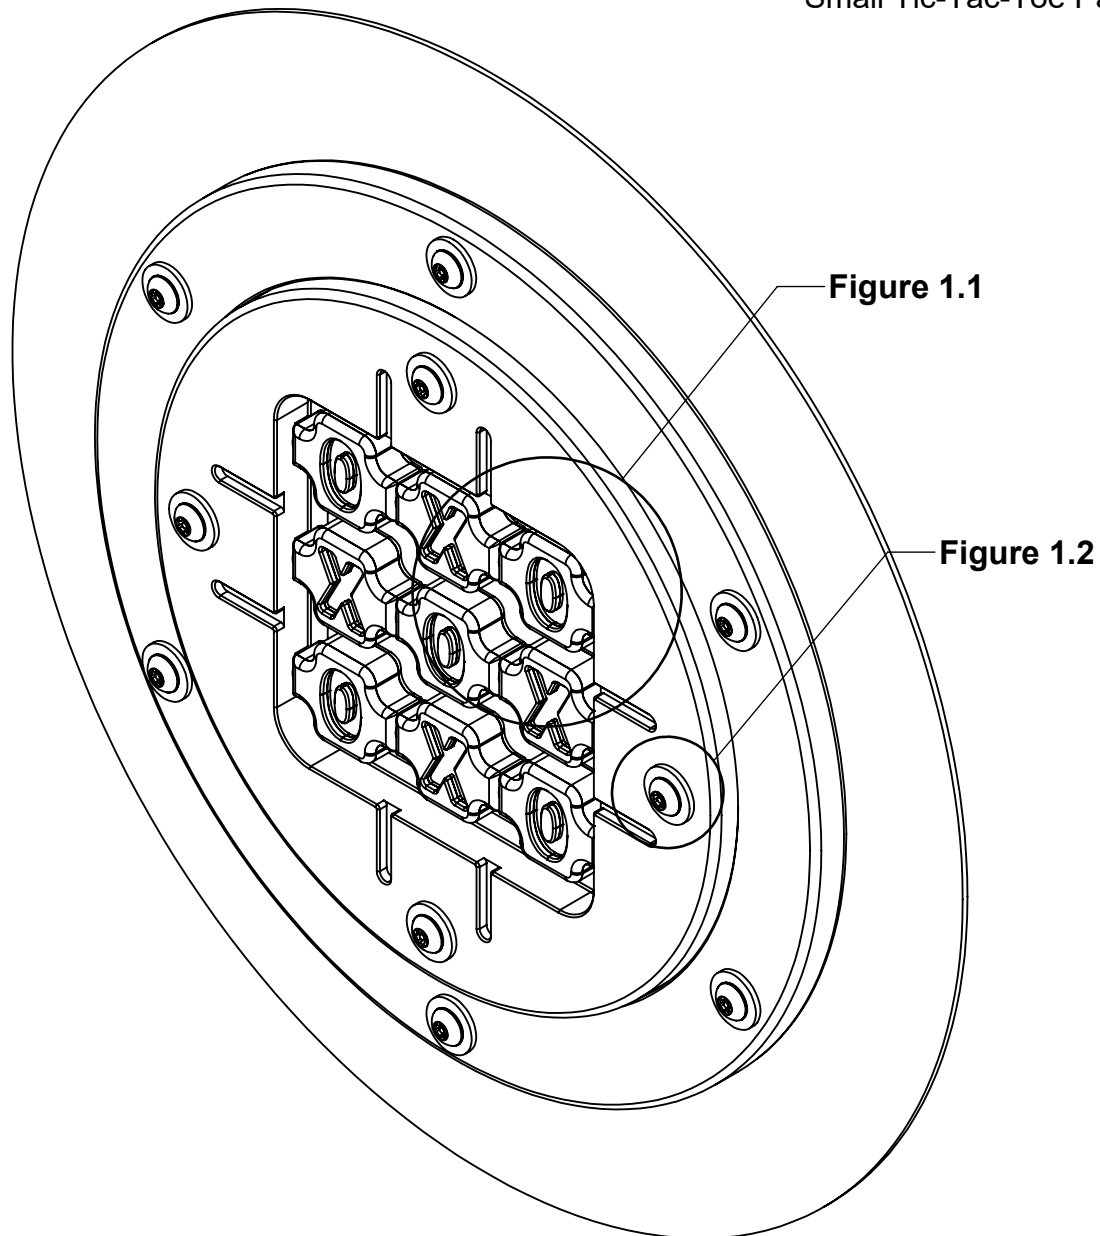

NOTE: Small Tic-Tac-Toe Panel to steel panel shown. Other configurations will vary slightly, but does not affect assembly.

Step 1 (Factory Assembled)

Position X-O Parts and washers on 5/16" SS Rod as shown in Figure 1.1.

NOTE: Three Required

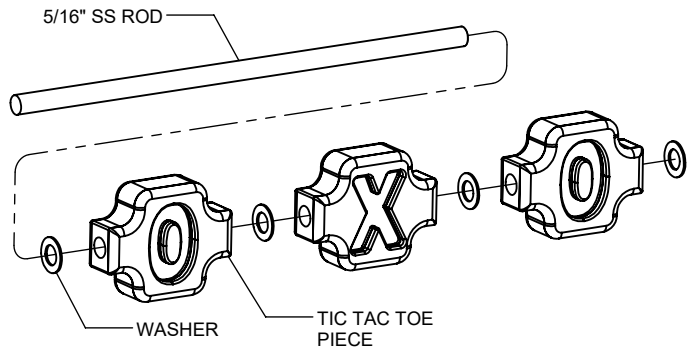


Figure 1.1

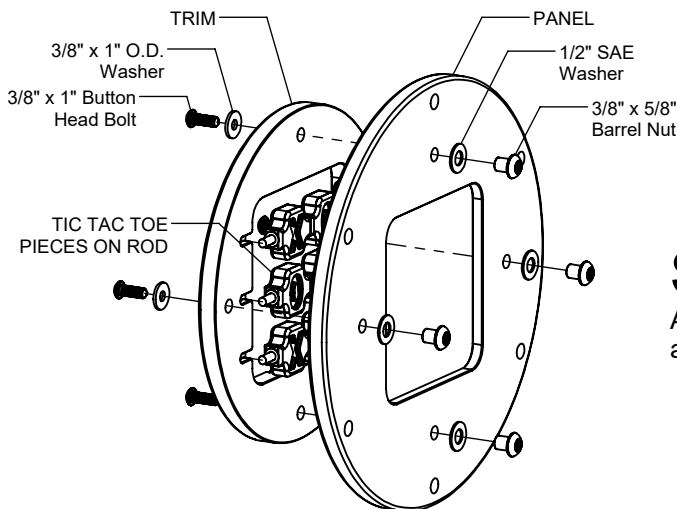


Figure 1.2

Step 2 (Factory Assembled)

Attach Tic-Tac-Toe Trim Panel to Tic-Tac-Toe Panel as shown in Figure 1.2. (See Note A)

Step 3a

For Steel Event Panel Only

Attach Tic-Tac-Toe Panel to Steel Panel as shown in Figure 2. (See Note A)

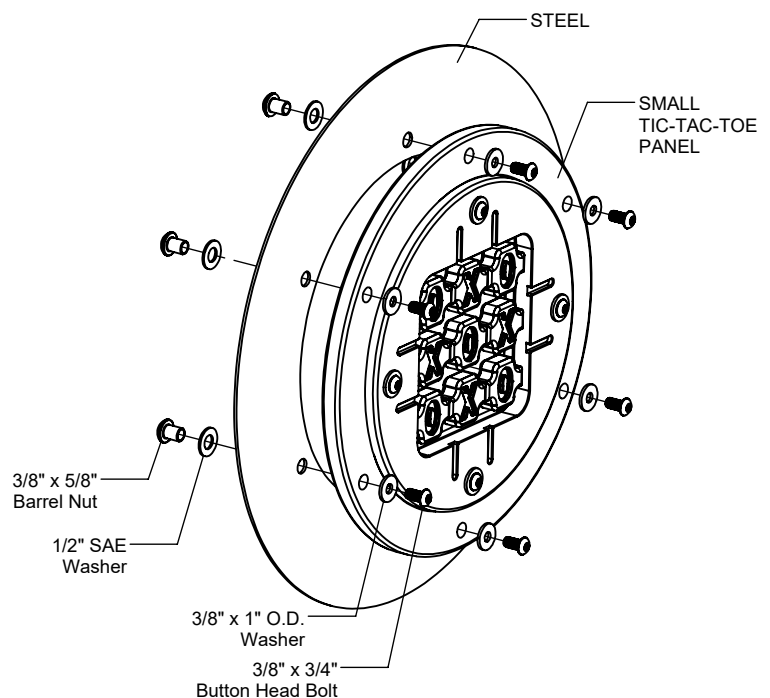


FIGURE 2

Step 3b

For HDPE Event Panel Only

Attach Tic-Tac-Toe Panel to Steel Panel as shown in Figure 3. (See Note A)

Step 4

Fully tighten all fasteners according to the "TIGHTENING TORQUE FOR HARDWARE" section of the Installation Manual.

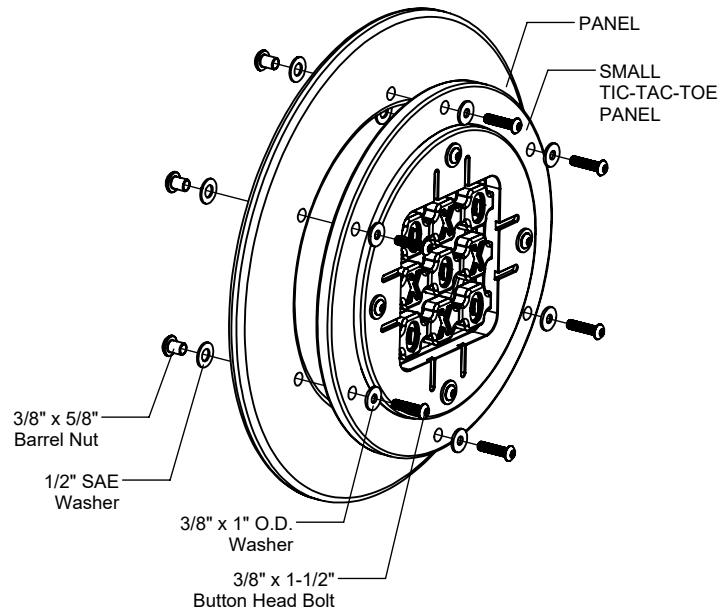


FIGURE 3

Parts List

STEEL MOUNT		
Part #	DESCRIPTION	QTY
9103032-TR	Bolt Button Head 3/8" x 3/4"	6
9333002	Washer Flat 3/8" x 1" O.D. x .100" thick	6
9345002	Washer Flat SAE 1/2"	6
9443022-TR	Nut Barrel 3/8" x 5/8" BH	6

HDPE MOUNT		
Part #	DESCRIPTION	QTY
9103072-TR	Bolt Button Head 3/8" x 1-1/2"	6
9333002	Washer Flat 3/8" x 1" O.D. x .100" thick	6
9345002	Washer Flat SAE 1/2"	6
9443022-TR	Nut Barrel 3/8" x 5/8" BH	6

Assembled Parts List

Part #	DESCRIPTION	QTY
EE-0696	Small Tic-Tac-Toe Panel	1
EE-0696-T	Small Tic-Tac-Toe Panel Trim	1
EE-4545-PXO	Tic-Tac-Toe Piece	9
581500	5/16" Dia SS Rod	3
581600	Washer 5/16" x 9/16"	12
9103052-TR	Bolt Button Head 3/8" x 1"	4
9333002	Washer Flat 3/8" x 1" O.D. x .100" thick	4
9345002	Washer Flat SAE 1/2"	4
9443022-TR	Nut Barrel 3/8" x 5/8" BH	4

Specifications

SMALL TIC-TAC-TOE PANEL, SMALL TIC-TAC-TOE TRIM & TIC-TAC-TOE PIECE:

Shall be made from high density 3/4" sheet plastic specially formulated for optimum UV stability and color retention.

HARDWARE:

Shall be stainless steel, zinc/nickel plated or galvanized as required to resist rust and corrosion.

Maintenance

Periodically tighten all screws, bolts and nuts. A periodic inspection of all parts is necessary. If a part is broken or worn, replace immediately. For general maintenance please refer to our Playground Maintenance Manual.