


IMPORTANT NOTES: Read First

(A) Use liquid thread lock (such as Loctite®) with all threaded hardware. **Important:** Liquid thread lock (prior to curing) helps to eliminate the common problem of "thread seizure" in stainless steel hardware by serving as a lubricant during assembly.

(B) Do not pour concrete until the equipment is completely assembled, leveled and plumbed. Concrete must be allowed to cure completely before using the equipment (at least 72 hours).

(C) Use appropriate compliant protective surfacing and adjust footing depths accordingly. See free publication - The Handbook for Public Playground Safety, Publication #325 at www.CPSC.gov for the surfacing appropriate for the fall height of the equipment or consult your surfacing supply representative.

FIGURE 1
Firepole Climber

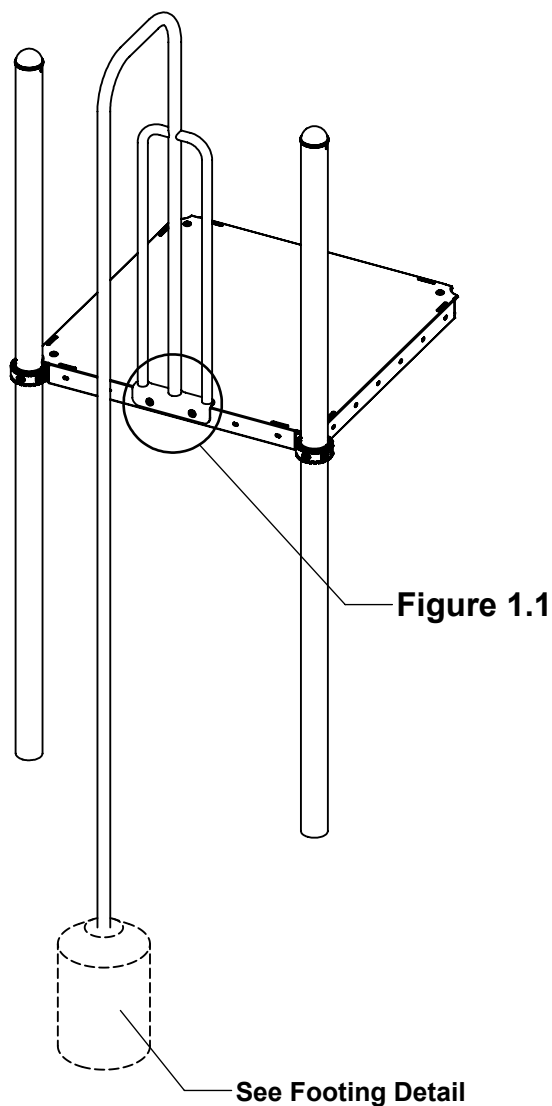

NOTE: 5' deck height shown.


Step 1

Refer to Footing Layout and mark footing hole location.
Dig (1) Ø 12" footing hole. Refer to Footing Detail for depth and details.


IMPORTANT: For areas with soft soil conditions, larger footings may be required.

* Footing depth must be adjusted to compensate for the depth/thickness requirements of selected safety surfacing.
See Section 06.1 of the Installation Manual

Footing Detail

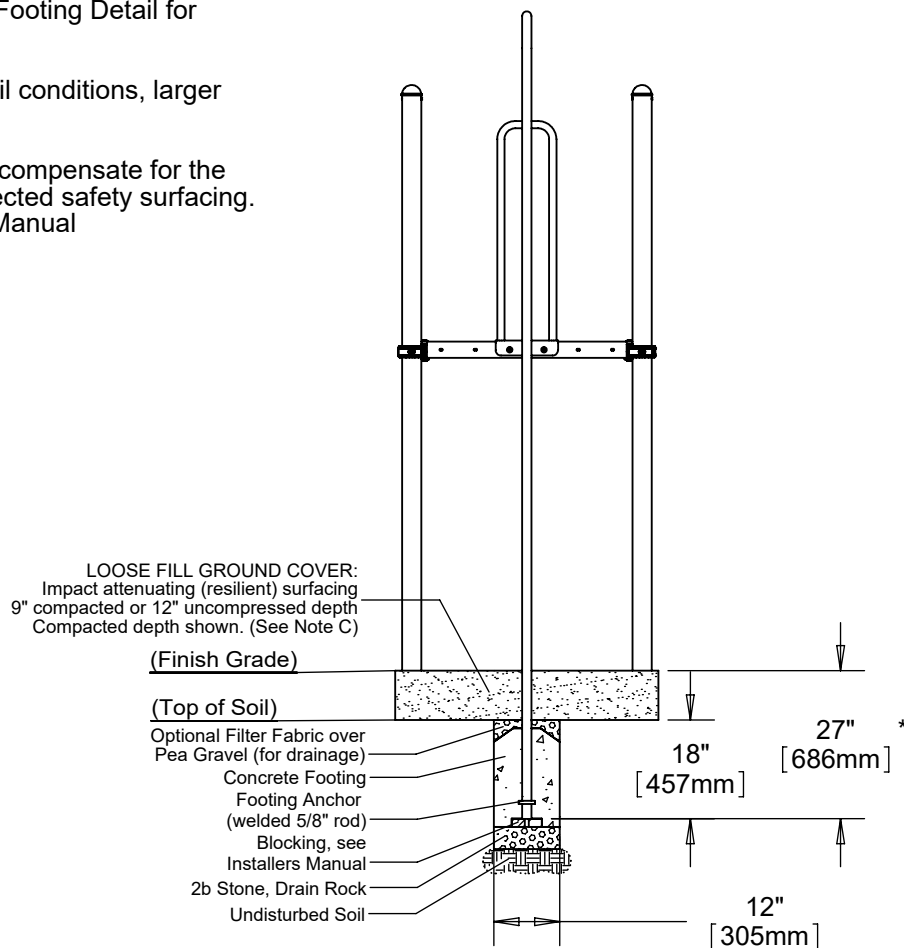

Top View - Footing Layout

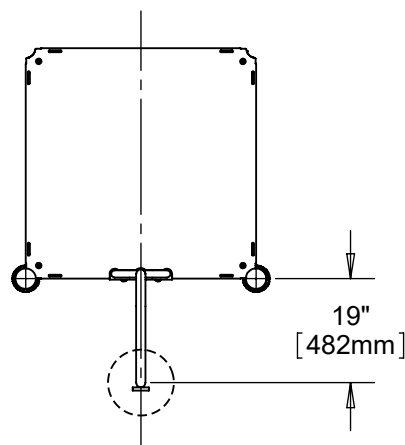

Step 2

Place Firepole Climber into footing hole and attach to deck as shown in Figure 1.1. (See Note A)

Step 3

Fully tighten all fasteners according to the "TIGHTENING TORQUE FOR HARDWARE" section of the Installation Manual.

Step 4

Plumb and level entire component. Pour concrete into footing hole. Allow at least 72 hours to cure before using this equipment. (See Note B)

Step 5

Place appropriate compliant protective surfacing under and around Firepole Climber. (See Note C)

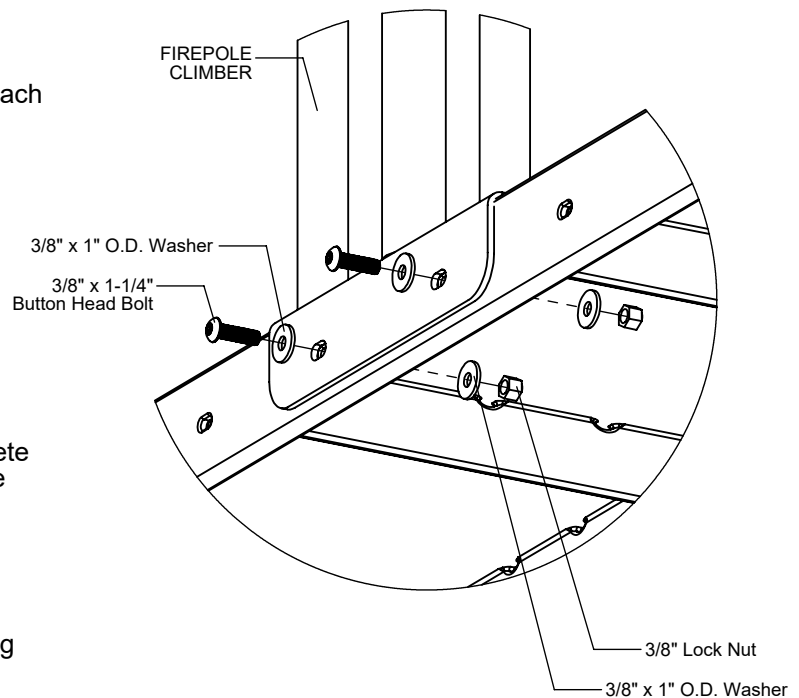


Figure 1.1

Specifications

FIREPOLE CLIMBER:

Shall be constructed of 1.660" O.D. 11 gauge steel tubing with welded 3/16" thick steel mounting plate. The Firepole Climber has a multi-stage baked on powder coat finish.

HARDWARE:

Shall be stainless steel, zinc/nickel plated or galvanized as required to resist rust and corrosion.

Parts List

Part #	DESCRIPTION	QTY
Varies	Firepole Climber R3.5	1
9103062-TR	Bolt Button Head 3/8" x 1-1/4"	2
9333002	Washer Flat 3/8" x 1" O.D. x .100" thick	4
9413002	Nut Lock 3/8"	2

Maintenance

Periodically tighten all screws, bolts and nuts. A periodic inspection of all parts is necessary. If a part is broken or worn, replace immediately. For general maintenance please refer to our Playground Maintenance Manual.