


IMPORTANT NOTES: Read First

(A) Use liquid thread lock (such as Loctite®) with all threaded hardware. **Important:** Liquid thread lock (prior to curing) helps to eliminate the common problem of "thread seizure" in stainless steel hardware by serving as a lubricant during assembly.

Figure 1
Roto Stove Pipe
Post Mount

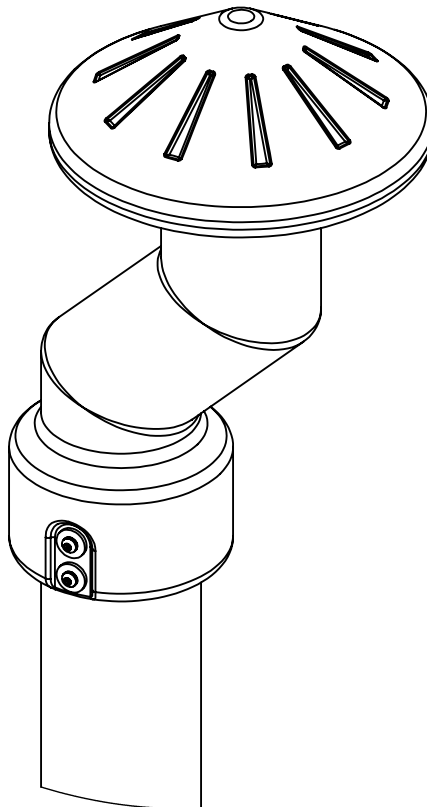

Step 1

Attach Stove Pipe to Post as shown in Figure 2.
(See Note A)

Step 2

Fully tighten all fasteners according to the
"TIGHTENING TORQUE FOR HARDWARE"
section of the Installation Manual.

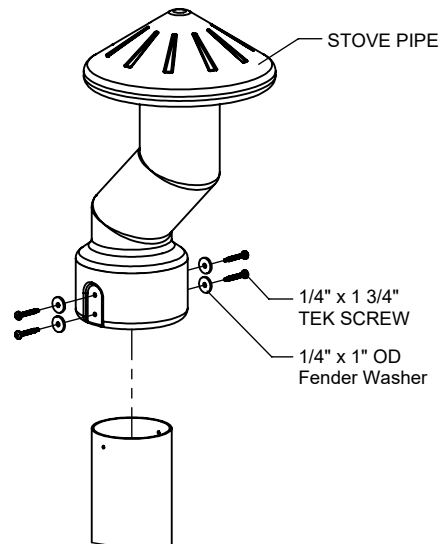


Figure 2

Parts List

Part #	DESCRIPTION	QTY
DF-0009	Tree House Stove Pipe	1
9271082-TR	1/4" x 1 3/4" Tek Screw	4
9321052-THK	Washer Fender 1/4" x 1" OD x .125" thk	4

Specifications

ROTO STOVE PIPE:

Shall be constructed of UV-stabilized, rotationally molded, linear, low density polyethylene with an average wall thickness of .250".

HARDWARE:

Shall be stainless steel, zinc/nickel plated or galvanized as required to resist rust and corrosion.

Maintenance

Periodically tighten all screws, bolts and nuts. A periodic inspection of all parts is necessary. If a part is broken or worn, replace immediately. For general maintenance please refer to our Playground Maintenance Manual.