


IMPORTANT NOTES: Read First

(A) Use liquid thread lock (such as Loctite®) with all threaded hardware. **Important:** Liquid thread lock (prior to curing) helps to eliminate the common problem of "thread seizure" in stainless steel hardware by serving as a lubricant during assembly.

(B) Refer to Installation Manual for R3.5-09 Collars and 1702 Double Slide assembly instructions.

(C) Use appropriate compliant protective surfacing and adjust footing depths accordingly. See free publication - The Handbook for Public Playground Safety, Publication #325 at www.CPSC.gov for the surfacing appropriate for the fall height of the equipment or consult your surfacing supply representative.

FIGURE 1
Double Sit Down R3.5

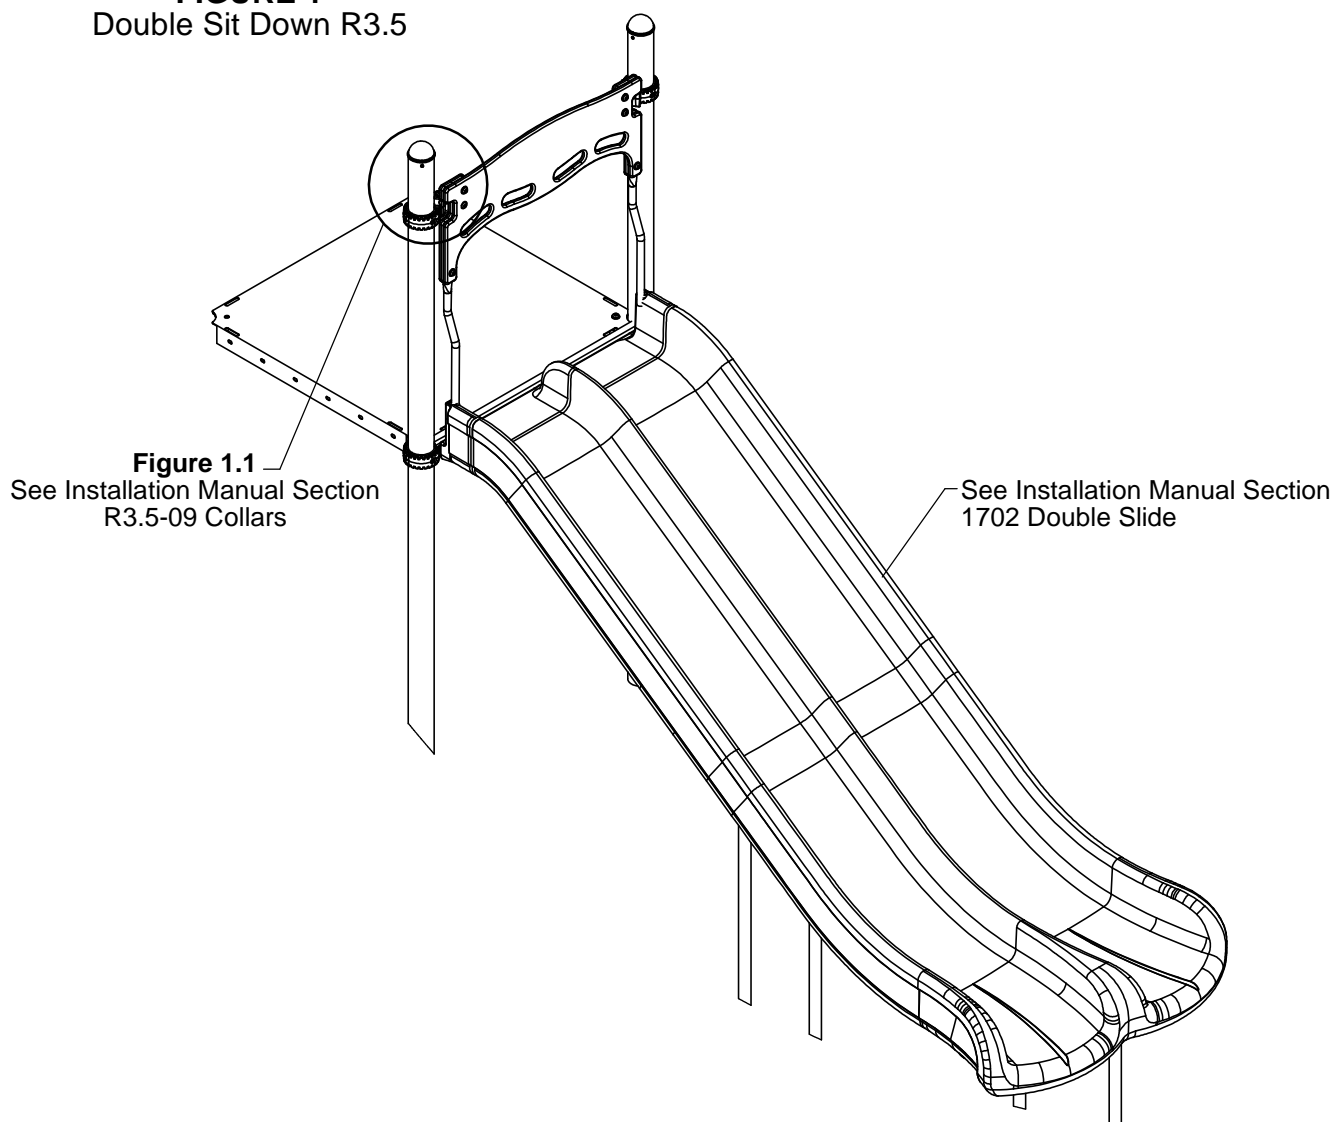


Step 1

Attach Double Slide to deck. (See Note B)

Step 2

Attach Back Panels and Double Sit Down Legs to Double Sit Down Panel as shown in Figure 2. (See Note A)

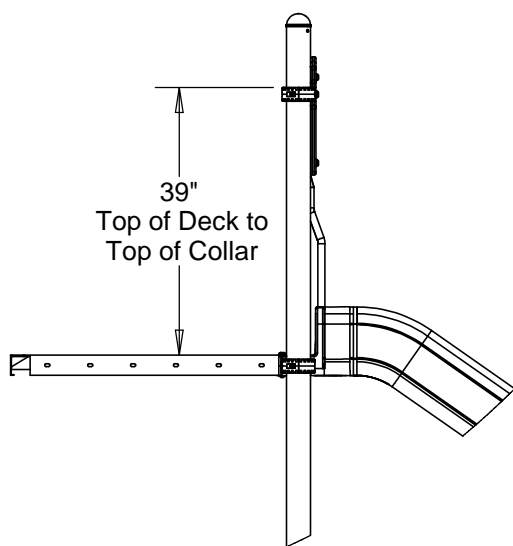

SIDE VIEW

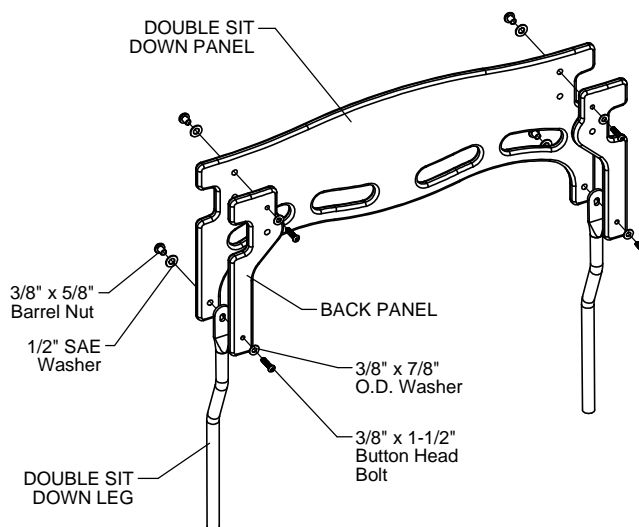


FIGURE 2

Step 3

Attach collars at height shown in Side View. (See Note B)

Step 4

Insert ends of Double Sit Down Leg into Double Slide and attach Double Sit Down to collars as shown in Figure 1.1. (See Note A)

Step 5

Fully tighten all fasteners according to the "TIGHTENING TORQUE FOR HARDWARE" section of the Installation Manual.

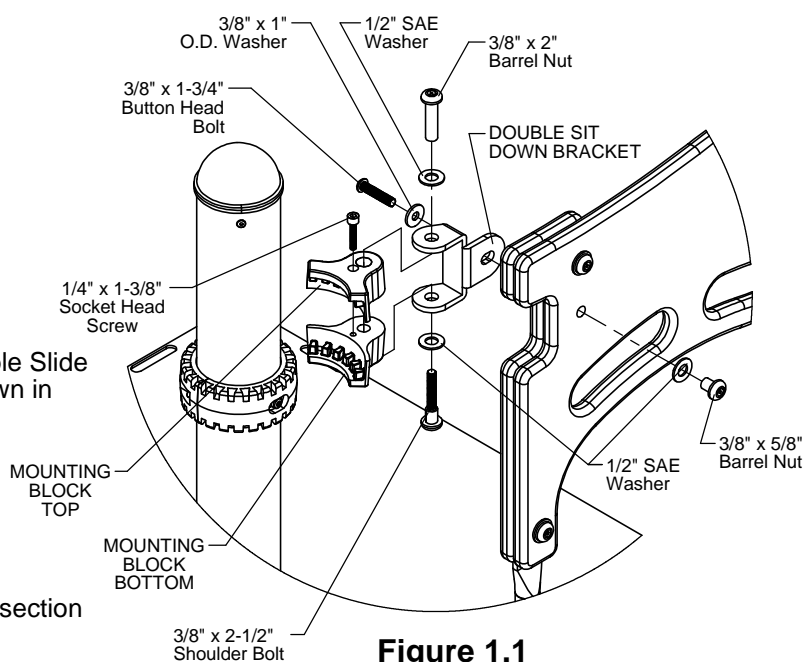


Figure 1.1

DOUBLE SIT DOWN R3.5

R3.5-1305

Page 3 of 3

Specifications

DOUBLE SIT DOWN and BACK PANEL:

Shall be made from high density 3/4" thick hot extruded polyethylene sheet plastic specially formulated for optimum UV stability and color retention.

DOUBLE SIT DOWN LEG:

Shall be fabricated from 1.029" O.D. 14 gauge steel tubing with a multi-stage baked-on powder coat finish.

MOUNTING BLOCKS:

Shall be two-part and precision die-cast from a high strength aluminum alloy. The Mounting Blocks have a multi-stage baked-on powder coat finish.

HARDWARE:

Shall be stainless steel, zinc/nickel plated or galvanized as required to resist rust and corrosion.

Parts List

Part #	DESCRIPTION	QTY.
BG-8157	Sit Down Bracket Double R3.5	2
EG-8123	Sit Down Panel Double R3.5	1
EG-8123-L	Sit Down Back Panel Double LH	1
EG-8123-R	Sit Down Back Panel Double RH	1
FS-1305-R35	Sit Down Panel Double R3.5 - Leg	2
GG-8125	Mount Block 6 Top R3.5	2
GG-8127	Mounting Block 6 Bottom R3.5	2
9103072-TR	Bolt Button Head 3/8" x 1-1/2"	4
9103082-TR	Bolt Button Head 3/8" x 1-3/4"	2
9143112-TR	Bolt Shoulder 3/8" x 2-1/2" BH	2
9281062-5	Screw Soc HD 1/4" x 1-3/8"	2
9333002	Washer Flat 3/8" x 1" O.D. x .100" thick	2
9333042	Washer Flat 3/8" x 7/8" O.D.	4
9345002	Washer Flat SAE 1/2"	10
9443022-TR	Nut Barrel 3/8" x 5/8" BH	6
9443092-TR	Nut Barrel 3/8" x 2" BH	2

Maintenance

Periodically tighten all screws, bolts and nuts. A periodic inspection of all parts is necessary. If a part is broken or worn, replace immediately. For general maintenance please refer to our Playground Maintenance Manual.



Manufactured by Krauss Craft, Inc.
www.playcraftsystems.com

For Customer Service Call
800.333.8519 (U.S.A.) or
541.955.9199 (International)

Rev H
7/7/2009