

See Figure 1
(Tall End
Caps ONLY)

Assembly View

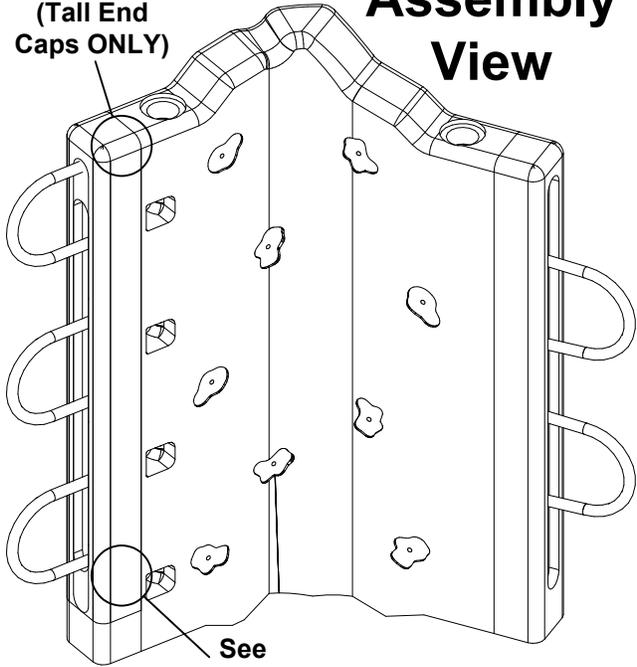


Figure 1

(Tall End Cap ONLY)


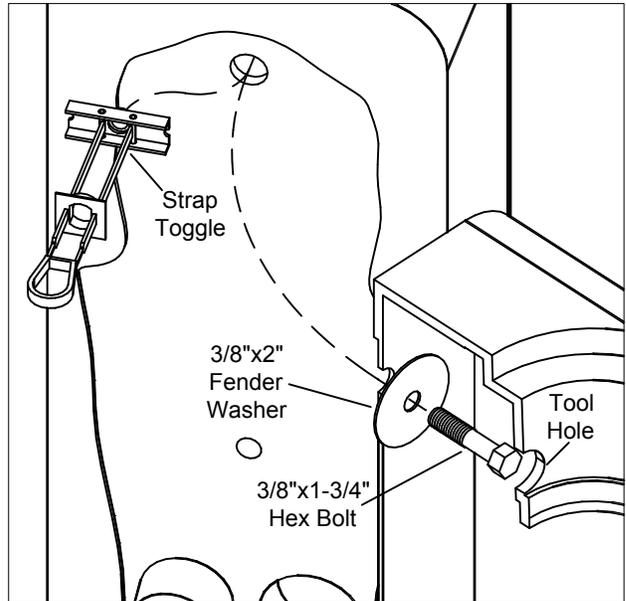


Figure 2

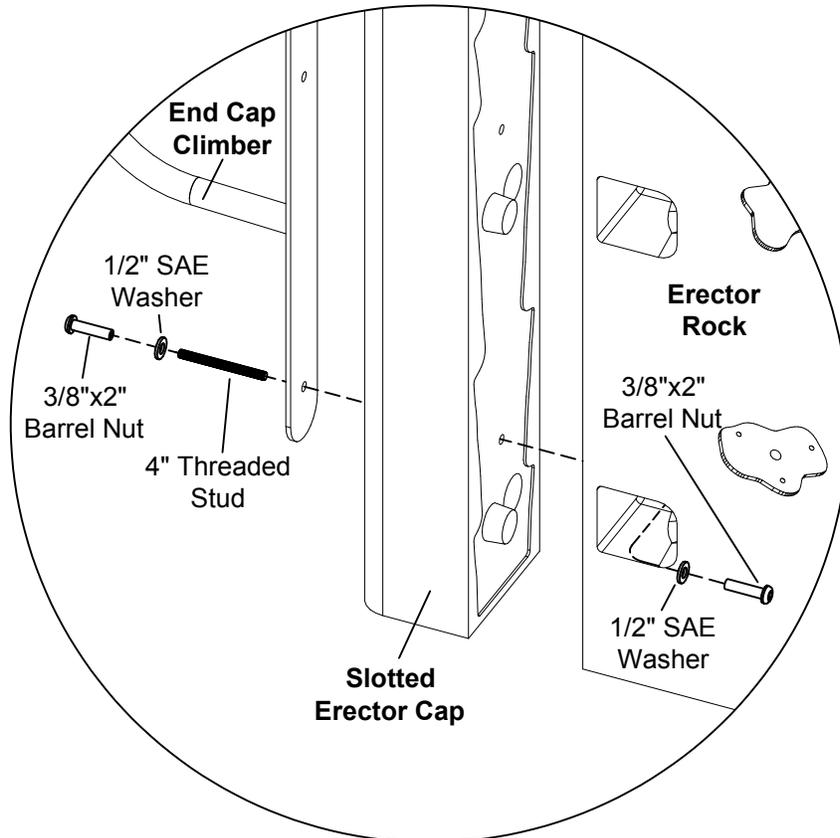

Parts List

<u>QTY.</u>	<u>DESCRIPTION</u>	<u>PART #</u>
1	Slotted End Cap	Varies
4	4" Threaded Stud	581384
8	1/2" SAE Washers	9345002
8	3/8"x2" Barrel Nuts	9443092-TR
 <u>Tall End Cap Only:</u>		
1	3/8"x1-3/4" Hex Bolts	9123082
1	3/8"x2" Fender Washers	9323092
1	Strap Toggle	9643160

Installation

Notes:

(A) Use liquid thread lock (such as Loctite) with all threaded hardware that does not include self-locking nuts.

(B) Caution must be given to Toggle Assembly as parts may become fragile during insertion and final securing.

Step 1. - TALL END CAP ONLY

Insert Snap Toggle in 3/4" hole in Tall End Cap and secure. Attach Tall End Cap to Erector Rock as shown in Figure 1.

Step 2.

Attach the End Cap Climber to the Slotted End Cap and Erector Rock as shown in Figure 2.

Step 3.

Fully tighten all fasteners.

Specifications

ERECTOR ROCKS:

Shall be roto-molded, UV stabilized, linear low-density polyethylene with .25" nominal wall thickness.

HARDWARE:

Shall be zinc/nickel plated, galvanized or stainless steel as required to resist rust and corrosion.

Maintenance

Periodically tighten all screws, bolts and nuts. A periodic inspection of all parts is necessary. If a part is broken or worn, replace immediately.