



## Assembly View


See Half Wall  
Assembly Page  
R5-1309.

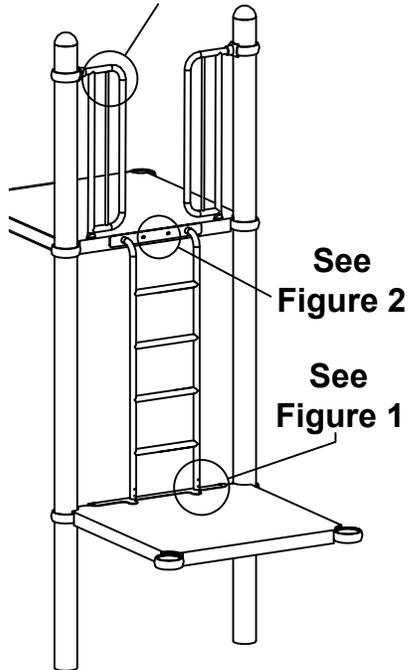

### Figure 1

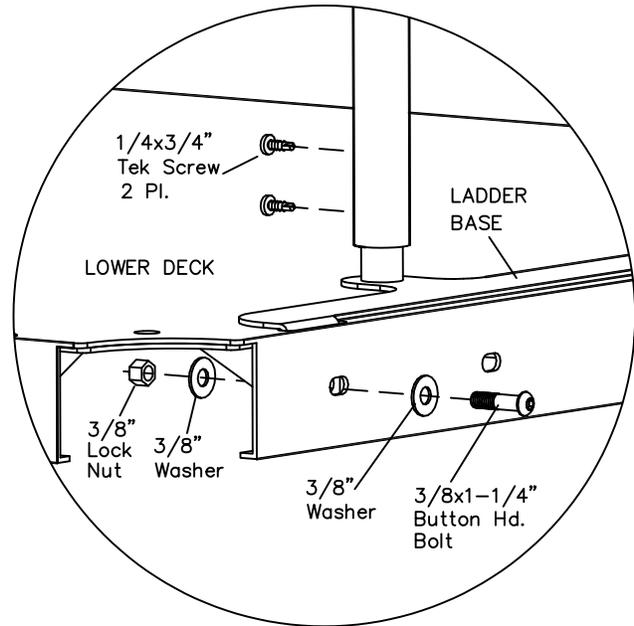

### Figure 2

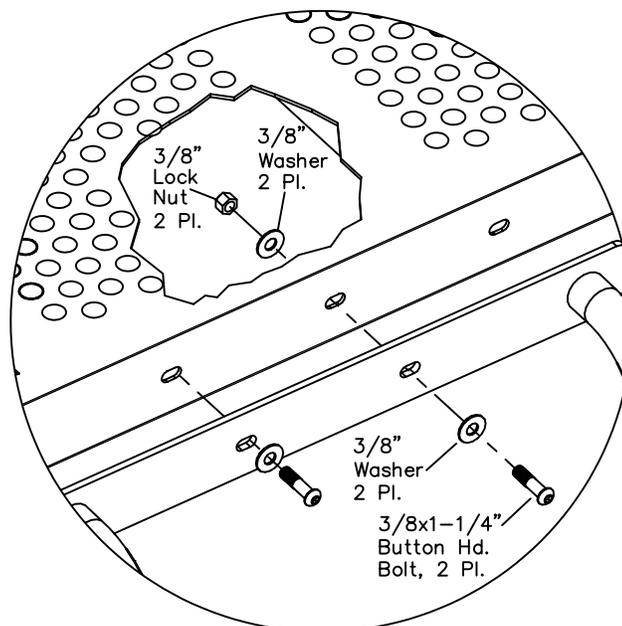

## Parts List

<u>QTY.</u>	<u>DESCRIPTION</u>	<u>PART #</u>
1 Set	Ladder Deck-to-Deck with Ladder Base	FS-1242
4	3/8 x 1-1/4" Button Hd. Bolts	9103062-TR
8	3/8" Washers	9333002
4	3/8" Lock Nuts	9413002
4	1/4 x 3/4" Tek Screw	9271032

## Installation

### Notes:

(A) Use liquid thread lock (such as Loctite) with all threaded hardware that does not include self-locking nuts

### Step 1.

Attach Ladder Base to lower deck as shown in Figure 1.

### Step 2.

Place the Ladder onto the base and attach the Ladder to the face of the upper deck using the hardware as shown in Figure 2.

### Step 3.

Secure the Ladder to the base using Tek Screws shown in Figure 1

### Step 3.

Fully tighten all fasteners.

## Specifications

### LADDER:

Shall have 1" standard pipe rungs. Rungs are evenly spaced and welded to the side supports. Finished with a baked-on powdercoat.

### LADDER BASE:

Fabricated of 10 GA steel with 1.209 O.D. tubing to fit inside bottom tubing of Ladder. Finished with a baked-on powdercoat.

### HARDWARE:

Shall be zinc/nickel plated, galvanized or stainless steel as required to resist rust and corrosion.

## Maintenance

Periodically tighten all screws, bolts and nuts.  
A periodic inspection of all parts is necessary.  
If a part is broken or worn, replace immediately.