


## Figure 1

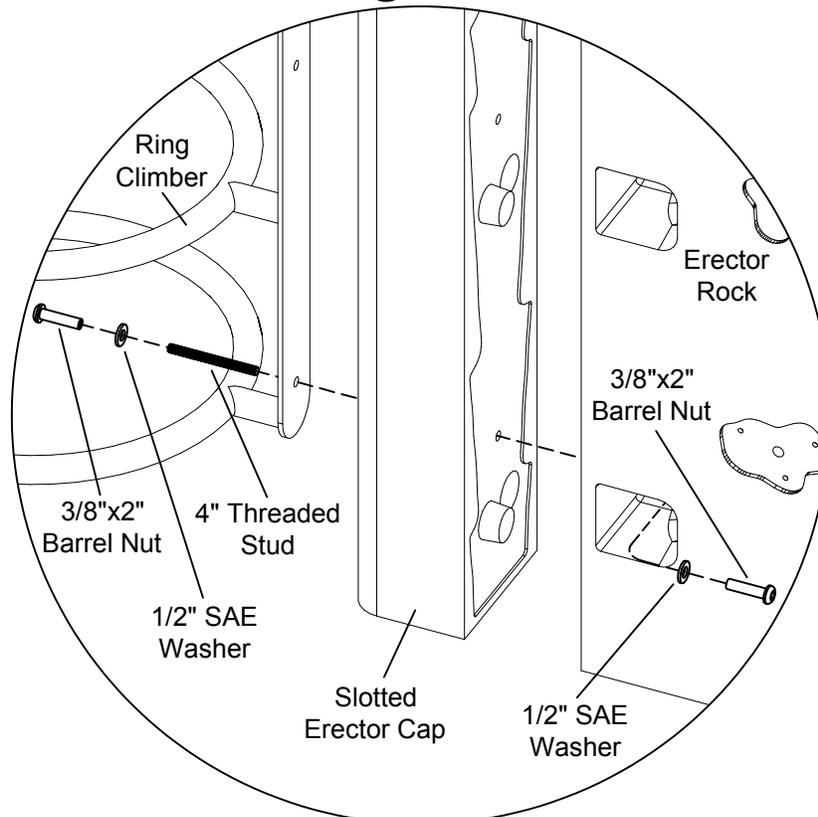

# RING CLIMBER ASSEMBLY

**1236-RC**

Page 2 of 2

## Parts List

<u>QTY.</u>	<u>DESCRIPTION</u>	<u>PART #</u>
1	Ring Climber	FS-1236-RC
12	4" Threaded Stud	581384
24	1/2" SAE Washers	9345002
24	3/8"x2" Barrel Nuts	9443092-TR

## Installation

### Notes:

(A) Use liquid thread lock (such as Loctite) with all threaded hardware that does not include self-locking nuts.

### Step 1.

Attach the Ring Climber to the Slotted End Caps and Erector Rocks as shown in Figure 1.

### Step 2.

Fully tighten all fasteners.

## Specifications

### RING CLIMBER:

Shall be made of 1.315" OD, 12 gage steel tubing welded to 1/4"x3" flat bar brackets.

### HARDWARE:

Shall be zinc/nickel plated, galvanized or stainless steel as required to resist rust and corrosion.

## Maintenance

Periodically tighten all screws, bolts and nuts.  
A periodic inspection of all parts is necessary.  
If a part is broken or worn, replace immediately.



Manufactured by  
Krauss Craft, Inc.

Phone: 800.333.8519

Rev. B