



### Assembly View

See  
Figure 1

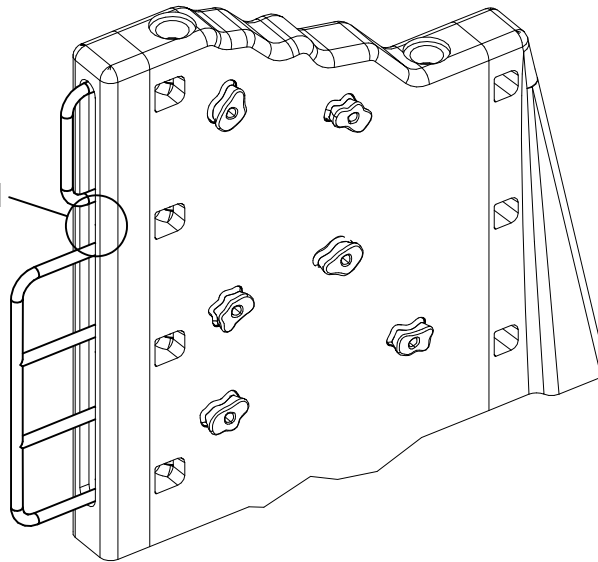

### Figure 1

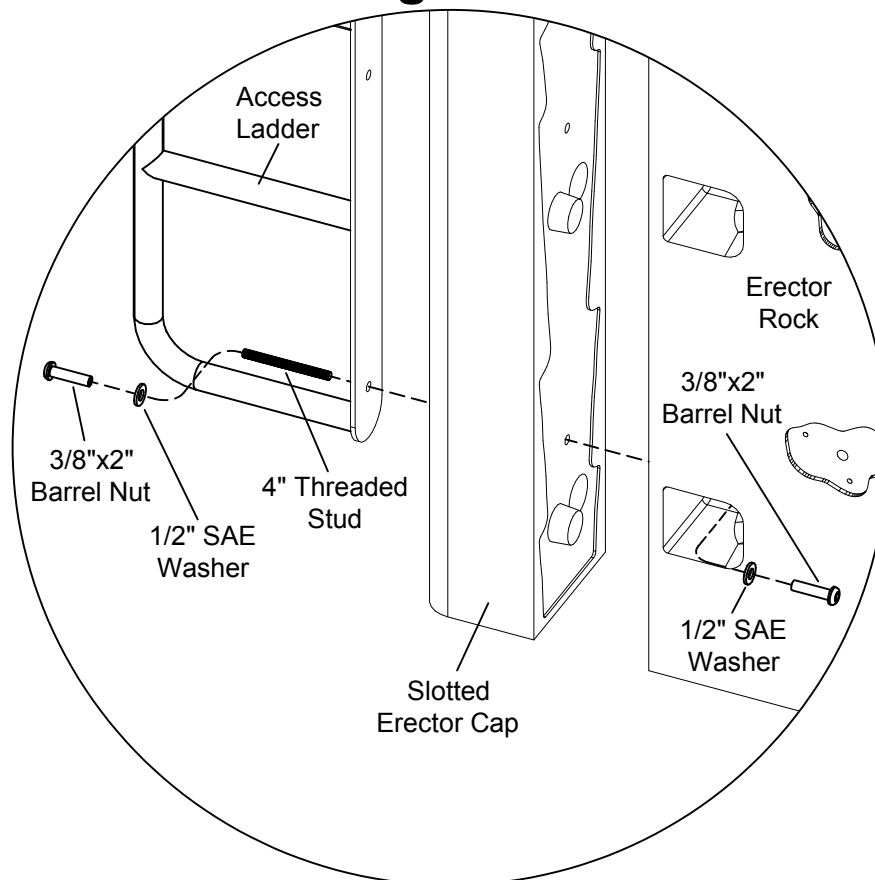

# ACCESS LADDER ASSEMBLY

**1236-AL**

Page 2 of 2

## Parts List

| <u>QTY.</u> | <u>DESCRIPTION</u>  | <u>PART #</u> |
|-------------|---------------------|---------------|
| 1           | Access Ladder       | FS-1236-AL    |
| 4           | 4" Threaded Stud    | 581384        |
| 8           | 1/2" SAE Washers    | 9345002       |
| 8           | 3/8"x2" Barrel Nuts | 9443092-TR    |

## Installation

### Notes:

**(A)** Use liquid thread lock (such as Loctite) with all threaded hardware that does not include self-locking nuts.

### Step 1.

Attach the Access Ladder to the Slotted End Caps and Erector Rocks as shown in Figure 1.

### Step 2.

Fully tighten all fasteners.

## Specifications

### ACCESS LADDER:

Shall be made of 1.315" OD, 12 gage steel tube welded to 1/4"x3" flat bar brackets.

### HARDWARE:

Shall be zinc/nickel plated, galvanized or stainless steel as required to resist rust and corrosion.

## Maintenance

Periodically tighten all screws, bolts and nuts.  
A periodic inspection of all parts is necessary.  
If a part is broken or worn, replace immediately.



Manufactured by  
Krauss Craft, Inc.

Phone: 800.333.8519

Rev. A