


IMPORTANT NOTES: Read First

(A) Use liquid thread lock (such as Loctite[®]) with all threaded hardware. **Important:** Liquid thread lock (prior to curing) helps to eliminate the common problem of "thread seizure" in stainless steel hardware by serving as a lubricant during assembly.

(B) Refer to Installation Manual for R5-09 Collars and R5-11 Socket Clamps assembly instructions.

FIGURE 1
Slide Sit Down Hood

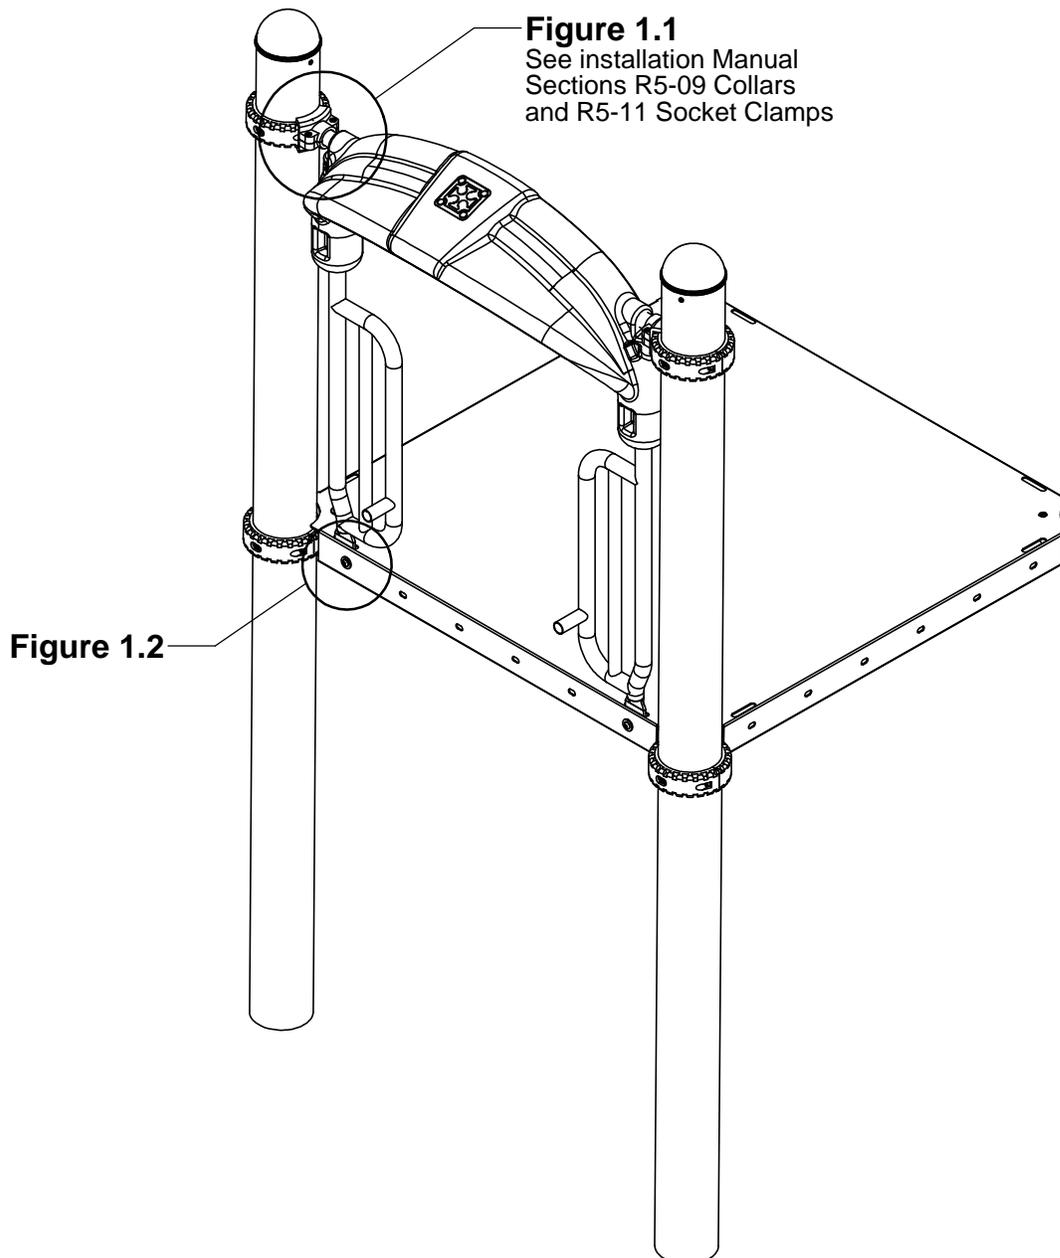

Step 1 (Factory Assembled)

Attach Sit Down Hood Guards to the Slide Hood as shown in Figure 2.


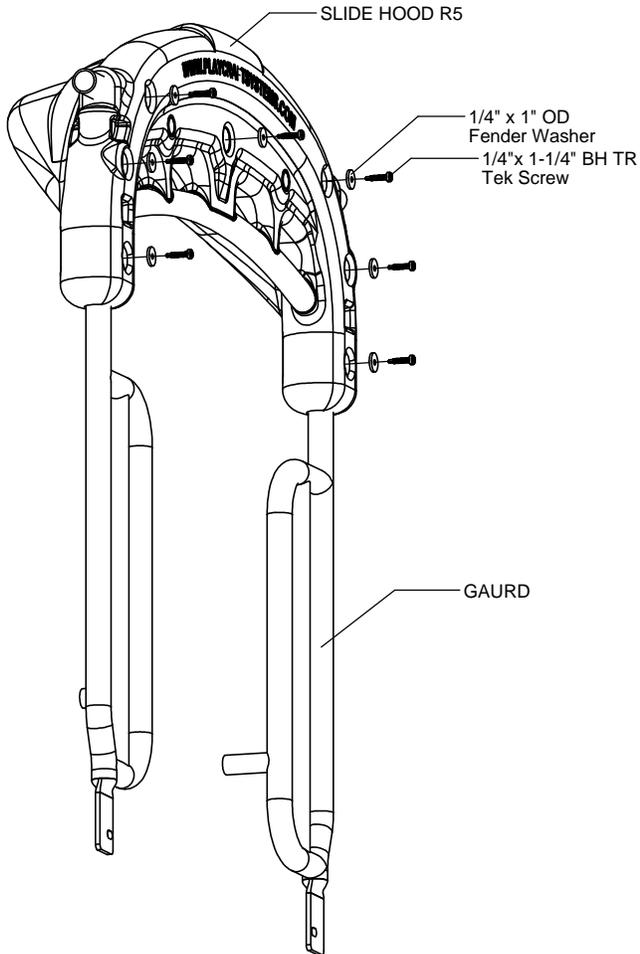


FIGURE 2

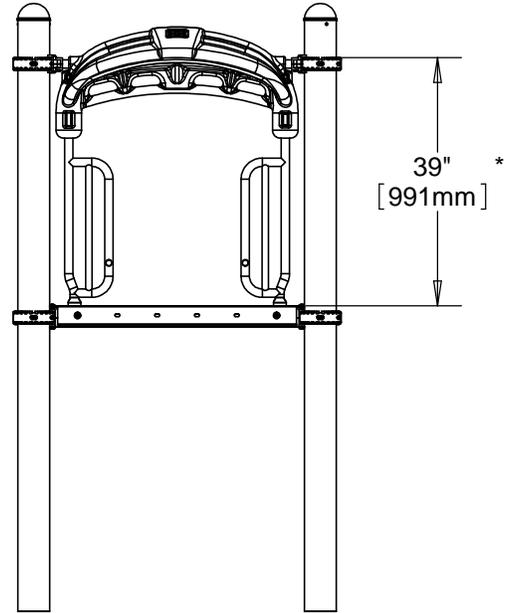

FRONT ELEVATION

Step 2

Locate and attach collars at the height shown in Front Elevation (See Note B).

* Height shown from top of deck to top of collar.

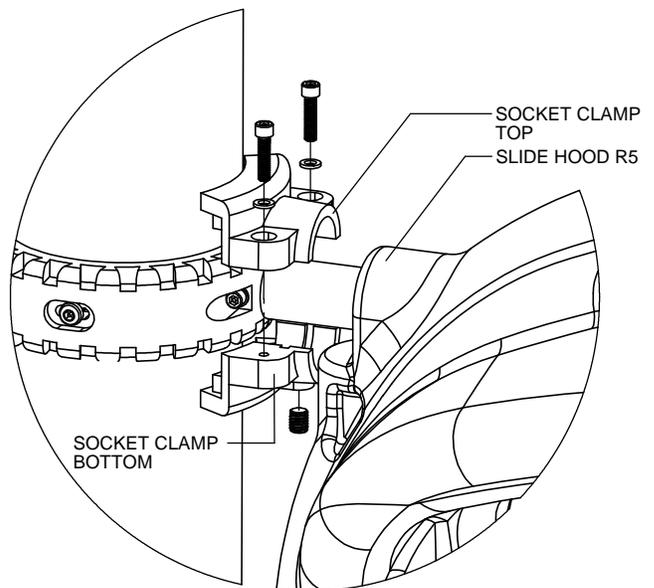


Figure 1.1

Step 3

Insert the bottom tabs of Slide Sit Down Hood into the slots of Deck and attach Slide Sit Down Hood to collars as shown in Figure 1.1. (See Note B)

Step 4

Attach Slide Sit Down Hood to Deck as shown in Figure 1.2. (See Note A)

Step 5

Fully tighten all fasteners according to the "TIGHTENING TORQUE FOR HARDWARE" section of the Installation Manual.

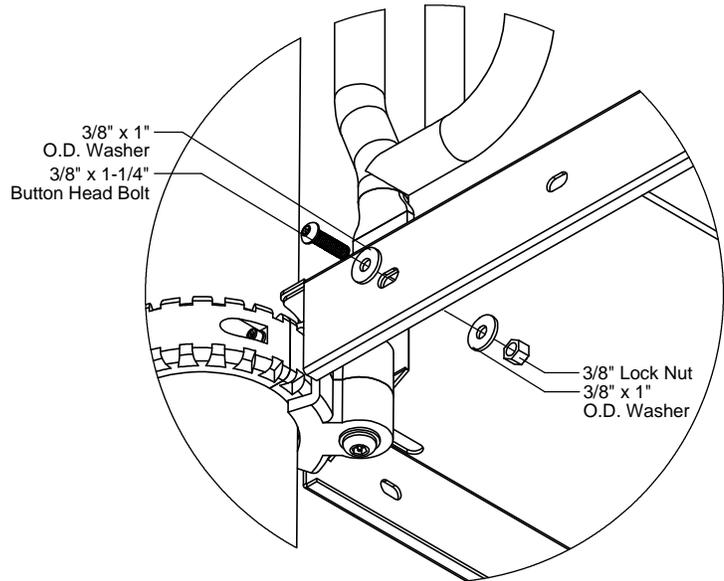


Figure 1.2

Specifications

SLIDE SIT DOWN HOOD:

Shall be constructed of UV-stabilized, rotationally molded, linear, low density polyethylene with an average wall thickness of .250".

SIT DOWN HOOD - TOP RAIL:

Shall be constructed of 1.315" O.D. 12 gauge steel tubing. Sit Down Hood - Top Rail shall have a multi-stage baked-on powder coat finish.

SIT DOWN HOOD GUARD SINGLE:

Shall be constructed of 1.315" O.D. 12 gauge and 1.029" O.D. 14 gauge steel tubing. Sit Down Hood Guard shall have a multi-stage baked-on powder coat finish.

HARDWARE:

Shall be stainless steel, zinc/nickel plated or galvanized as required to resist rust and corrosion.

Parts List

Part #	DESCRIPTION	QTY.
HS-1001-R5	Socket Clamp Set R5	2
9103062-TR	Bolt Button Head 3/8" x 1-1/4"	2
9333002	Washer Flat 3/8" x 1" O.D. x .100" thick	4
9413002	Nut Lock 3/8"	2

Assembled Parts List

Part #	DESCRIPTION	QTY.
DF-4827	Slide Hood R5	1
FS-1303-R5	Sit Down Hood Guard	2
LF-0009	Sit Down Hood - Top Rail	1
9271062-TR	Screw Tek 1/4" x 1-1/4" BH TR	7
9321052-THK	Washer Fender 1/4" x 1" OD x .125" thk	7

Maintenance

Periodically tighten all screws, bolts and nuts. A periodic inspection of all parts is necessary. If a part is broken or worn, replace immediately. For general maintenance please refer to our Playground Maintenance Manual.