


IMPORTANT NOTES: Read First

(A) Use liquid thread lock (such as Loctite®) with all threaded hardware. **Important:** Liquid thread lock (prior to curing) helps to eliminate the common problem of "thread seizure" in stainless steel hardware by serving as a lubricant during assembly.

(B) Refer to Installation Manual for R5-1310 Transition Wall installation instructions.

(C) An appropriate energy absorbing safety surface is required under and around all playground equipment. Loose fill protective surfacing is shown only as an example for the purpose of this assembly instruction. Other surfacing material may vary in thickness and/or compression depths. See free publication - The Handbook for Public Playground Safety, Publication #325 at www.cpsc.gov for the surfacing appropriate for the fall height of the equipment or consult your surfacing supply representative.

FIGURE 1
Clever Climber

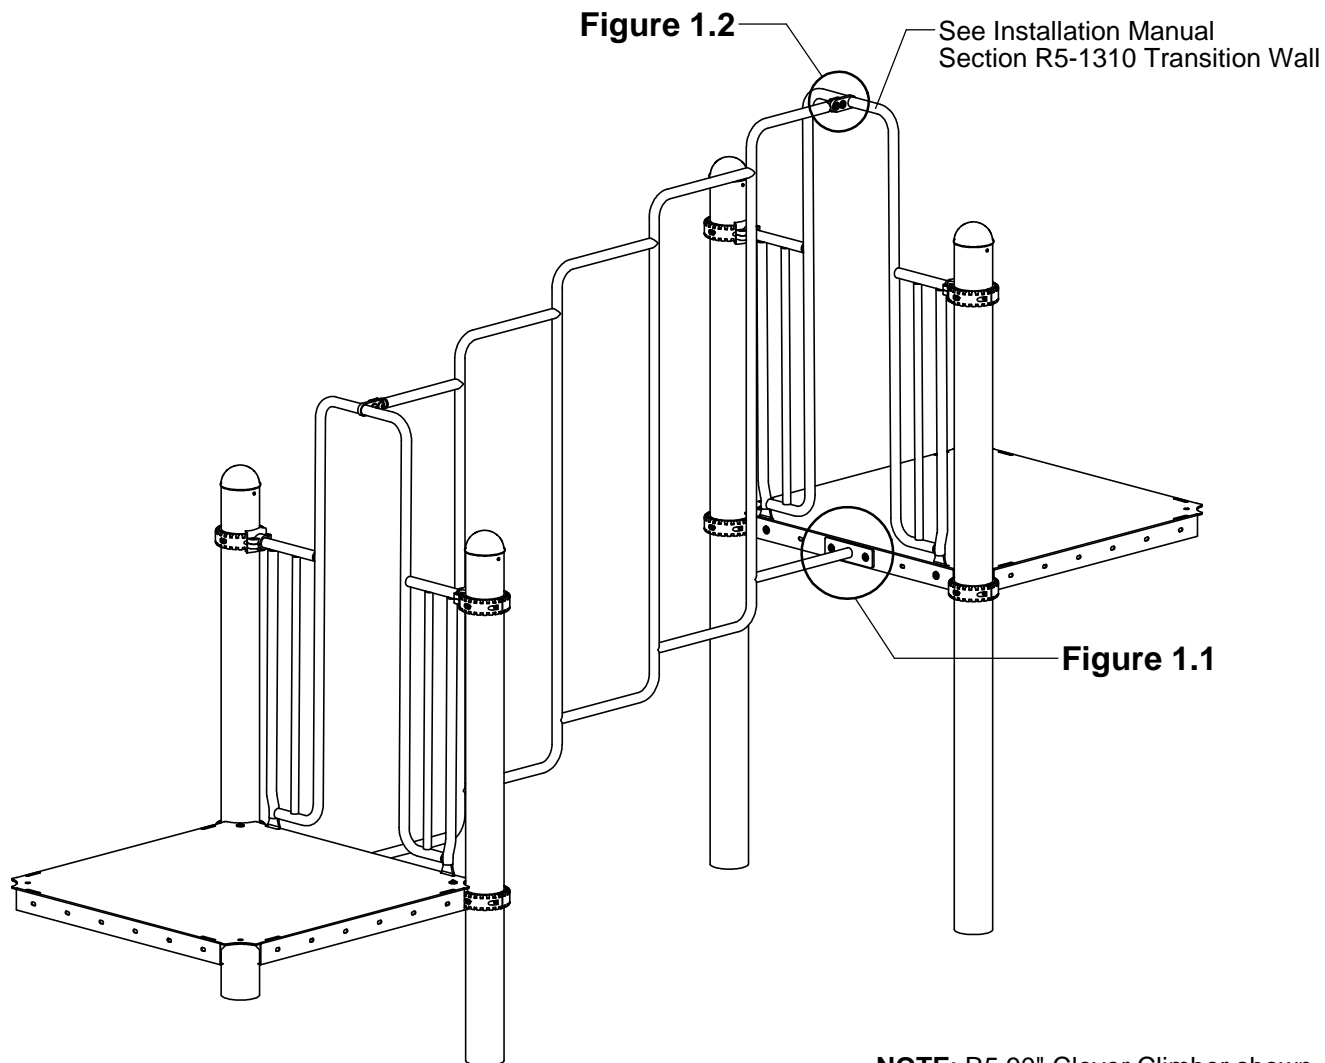

NOTE: R5 90" Clever Climber shown. Other configurations will vary slightly, but does not affect assembly.

Step 1

Attach Transition Wall to deck and collars.
(See Note B)

Step 2

Attach Clever Climber to deck as shown
in Figure 1.1. (See Note A)

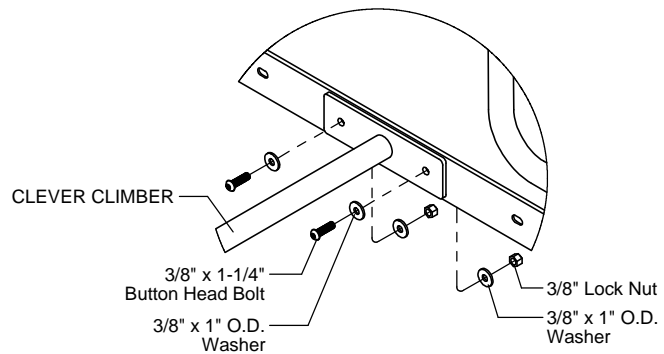


Figure 1.1

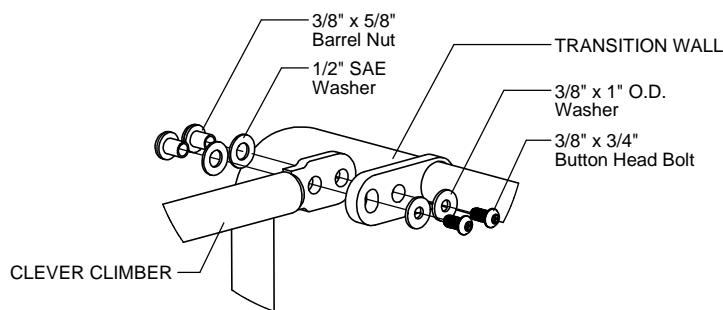


Figure 1.2

Step 3

Attach Clever Climber to Transition Wall as
shown in Figure 1.2. (See Note A)

Step 4

Fully tighten all fasteners according to the
"TIGHTENING TORQUE FOR HARDWARE"
section of the Installation Manual.

Step 5

Place required protective surfacing under and
around Clever Climber. (See Note C)

Parts List

Part #	DESCRIPTION	QTY.
Varies	Clever Climber R5	1
9103032-TR	Bolt Button Head 3/8" x 3/4"	4
9103062-TR	Bolt Button Head 3/8" x 1-1/4"	4
9333002	Washer Flat 3/8" x 1" O.D. x .100" thick	12
9345002	Washer Flat SAE 1/2"	4
9413002	Nut Lock 3/8"	4
9443022-TR	Nut Barrel 3/8" x 5/8" BH	4

Specifications

CLEVER CLIMBER R5:

Shall be fabricated using 1.315" O.D. 12 gauge steel tubing with welded 1/4" thick steel mounting plates and 3/8" thick steel tabs. The Clever Climber R5 shall have a multi-stage baked-on powder coat finish.

HARDWARE:

Shall be stainless steel, zinc/nickel plated or galvanized as required to resist rust and corrosion.

Maintenance

Periodically tighten all screws, bolts and nuts. A periodic inspection of all parts is necessary. If a part is broken or worn, replace immediately. For general maintenance please refer to our Playground Maintenance Manual.