

IMPORTANT NOTES: Read First

(A) Use liquid thread lock (such as Loctite®) with all threaded hardware. **Important:** Liquid thread lock (prior to curing) helps to eliminate the common problem of "thread seizure" in stainless steel hardware by serving as a lubricant during assembly.

FIGURE 1
Tree Top Roto



NOTE: Tree Top Roto Large shown.
Other configurations will vary slightly,
but does not affect assembly.

Step 1

Slide Tree Top onto post and secure as shown in Figure 2. (See Note A)

Step 2

Fully tighten all fasteners according to the "TIGHTENING TORQUE FOR HARDWARE" section of the Installation Manual.

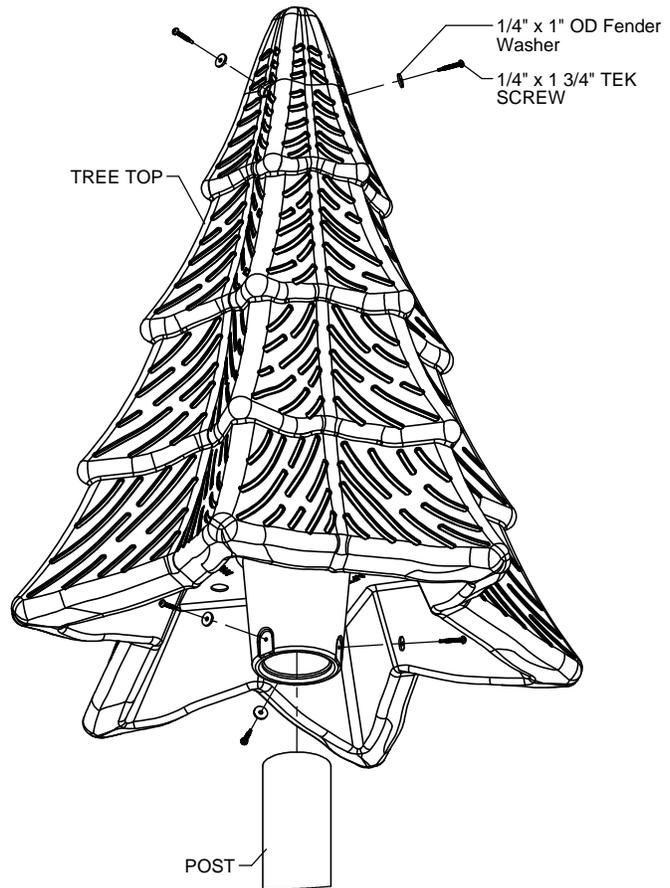


FIGURE 2

Parts List

S-1847-L Tree Top Roto Large R5		
Part #	DESCRIPTION	QTY.
DF-0003	Tree Top Roto Large R5	1
9271082-TR	1/4" x 1 3/4" Tek Screw	6
9321052-THK	Washer Fender 1/4" x 1" OD x .125" thk	6

S-1847-S Tree Top Roto Small R5		
Part #	DESCRIPTION	QTY.
DF-0004	Tree Top Roto Small R5	1
9271082-TR	1/4" x 1 3/4" Tek Screw	6
9321052-THK	Washer Fender 1/4" x 1" OD x .125" thk	6

Specifications

TREE TOP ROTO R5:

Shall be constructed of UV-stabilized, rotationally molded, linear, low density polyethylene with an average wall thickness of .250".

HARDWARE:

Shall be stainless steel, zinc/nickel plated or galvanized as required to resist rust and corrosion.

Maintenance

Periodically tighten all screws, bolts and nuts. A periodic inspection of all parts is necessary. If a part is broken or worn, replace immediately. For general maintenance please refer to our Playground Maintenance Manual.