


**IMPORTANT NOTES: Read First**

(A) Use liquid thread lock (such as Loctite®) with all threaded hardware. **Important:** Liquid thread lock (prior to curing) helps to eliminate the common problem of "thread seizure" in stainless steel hardware by serving as a lubricant during assembly.

**FIGURE 1**  
Ramp Transition Plate

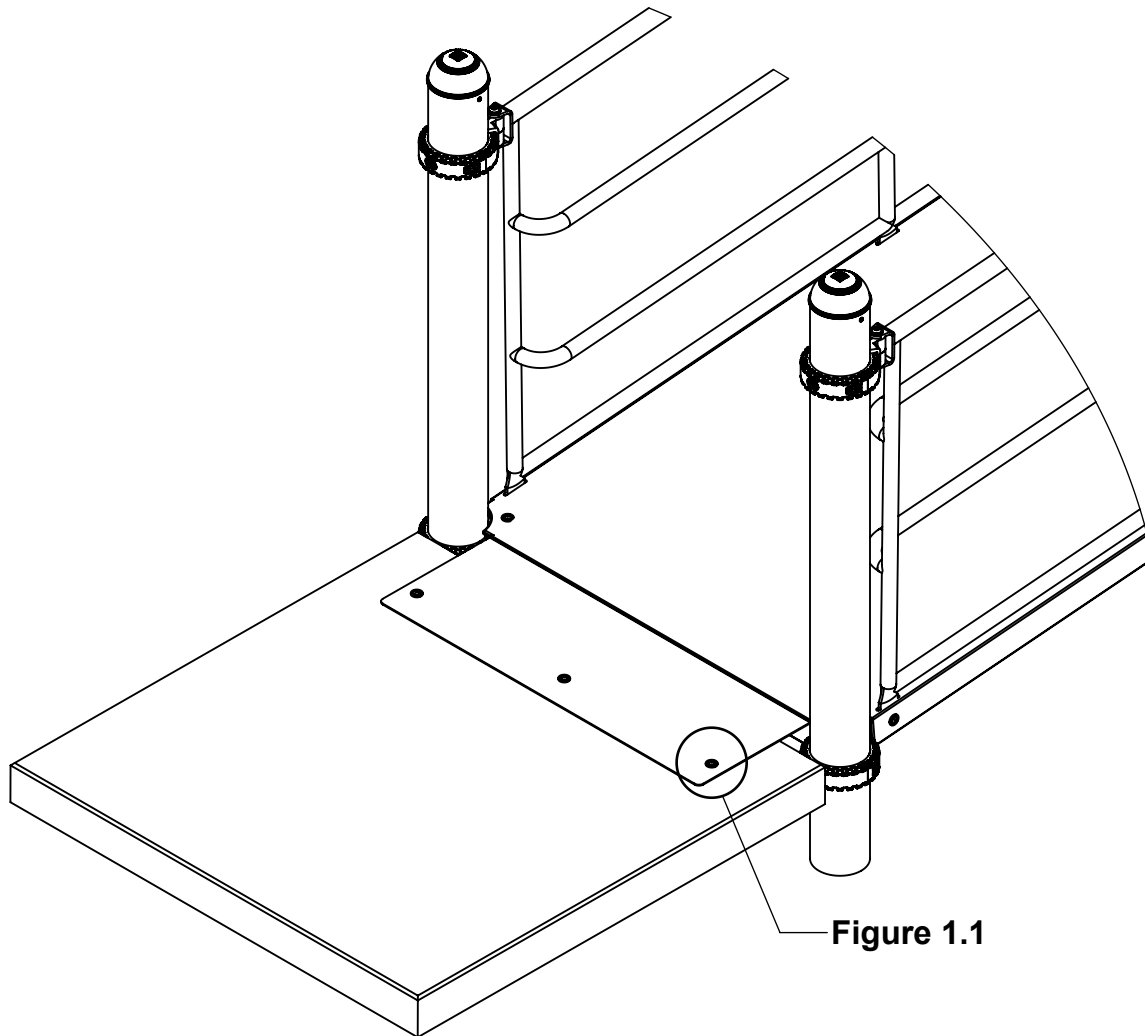


# RAMP TRANSITION PLATE INSTALLATION INSTRUCTIONS


**R5-1208-PLT**  
Page 2 of 2

## Step 1

Attach Transition Plate to Ramp as shown in Figure 2 (See Note A).

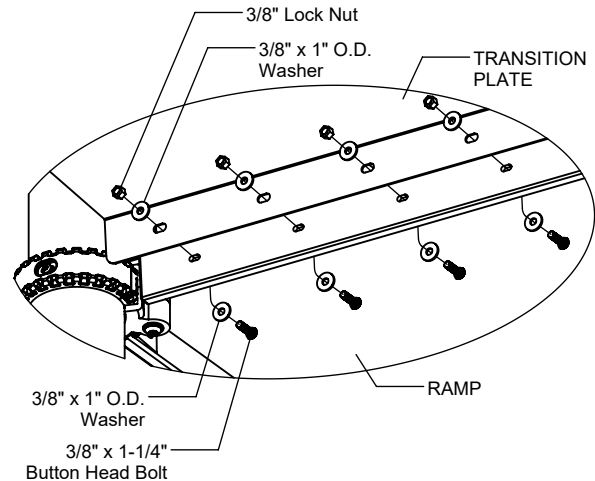

**FIGURE 2**

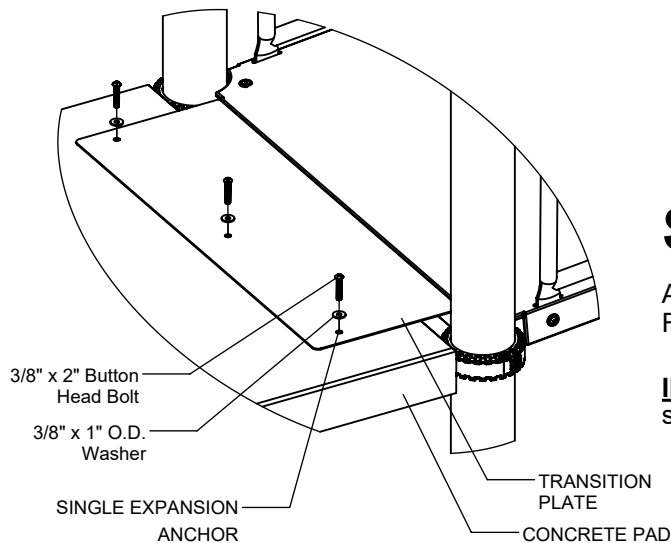

**Figure 1.1**

## Step 2

Attach Transition Plate to concrete as shown in Figure 1.1 (See Note A).

**IMPORTANT:** Single Expansion Anchors for this step are NOT INCLUDED.

## Parts List

| Part #     | DESCRIPTION                              | QTY |
|------------|--|-----|
| BE-0138    | Ramp Transition Plate                    | 1   |
| 9103062-TR | Bolt Button Head 3/8" x 1-1/4"           | 6   |
| 9103092-TR | Bolt Button Head 3/8" x 2"               | 3   |
| 9333002    | Washer Flat 3/8" x 1" O.D. x .100" thick | 15  |
| 9413002    | Nut Lock 3/8"                            | 6   |

## Specifications

### RAMP TRANSITION PLATE:

Shall be fabricated using 12ga HR sheet steel and will have a multi-stage baked-on powder coat finish.

### HARDWARE:

Shall be stainless steel, zinc/nickel plated or galvanized as required to resist rust and corrosion.

## Maintenance

Periodically tighten all screws, bolts and nuts. A periodic inspection of all parts is necessary. If a part is broken or worn, replace immediately. For general maintenance please refer to our Playground Maintenance Manual.