


IMPORTANT NOTES: Read First

(A) Use liquid thread lock (such as Loctite®) with all threaded hardware. **Important:** Liquid thread lock (prior to curing) helps to eliminate the common problem of "thread seizure" in stainless steel hardware by serving as a lubricant during assembly.

FIGURE 1
Clock Panel

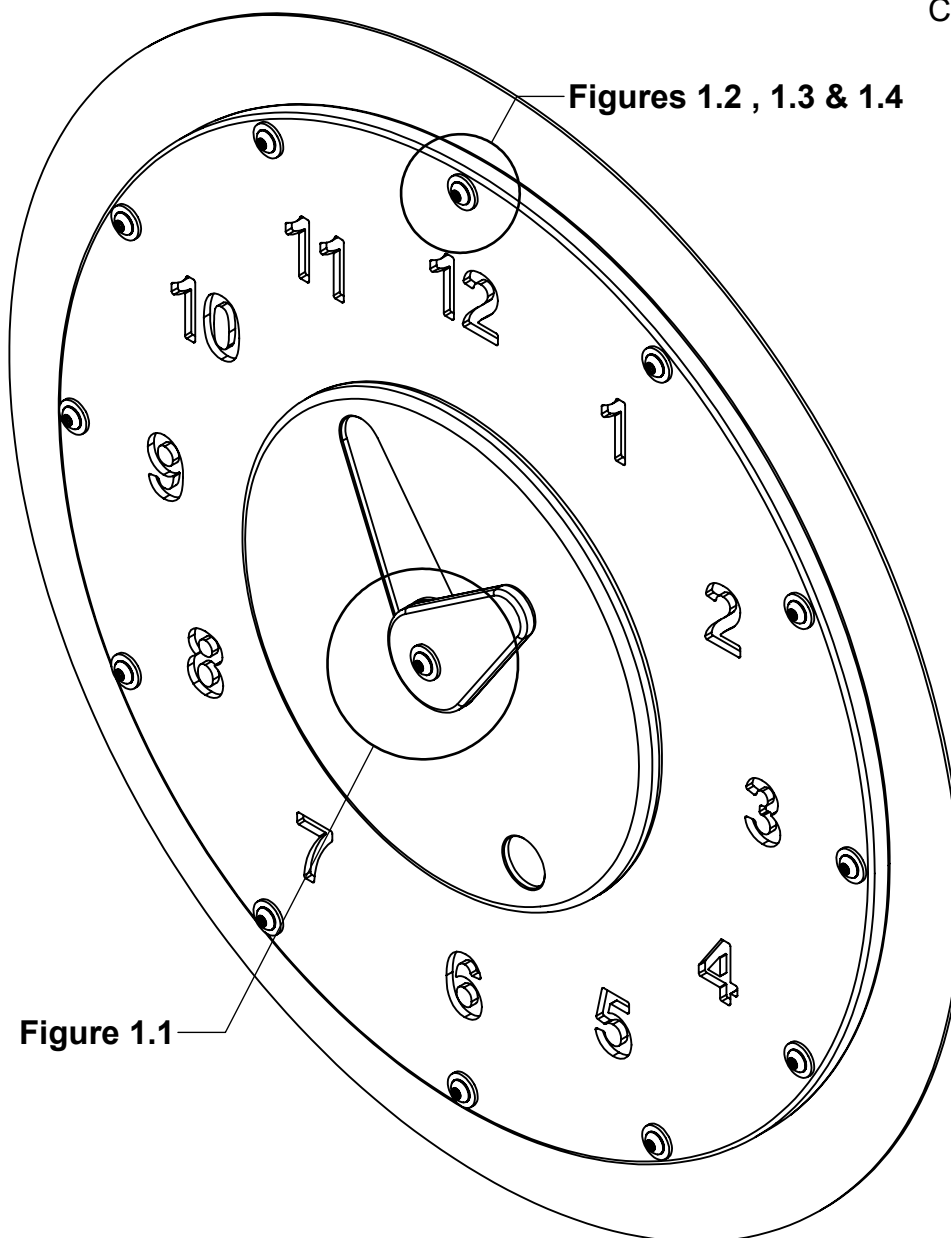

NOTE: Clock Panel to steel panel shown. Other configurations will vary slightly, but does not affect assembly.

Step 1 (Factory Assembled)

Attach Large and Small Hands to Clock Panel Insert as shown in Figure 1.1 (See Note A).

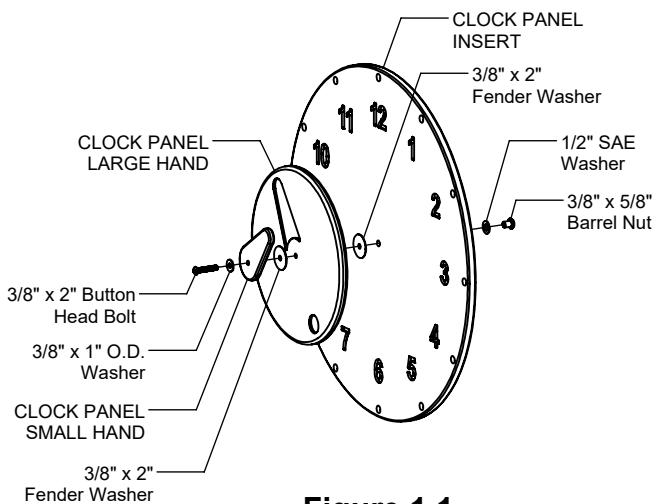


Figure 1.1

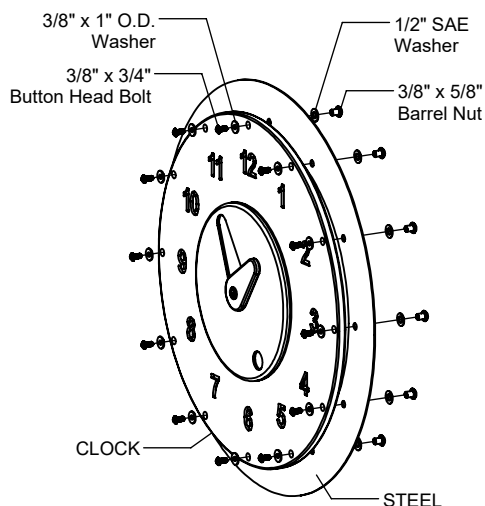


Figure 1.2

Step 2b

For HDPE Event Panel Only

Attach Clock Panel to HDPE Event Panel as shown in Figure 1.3 (See Note A).

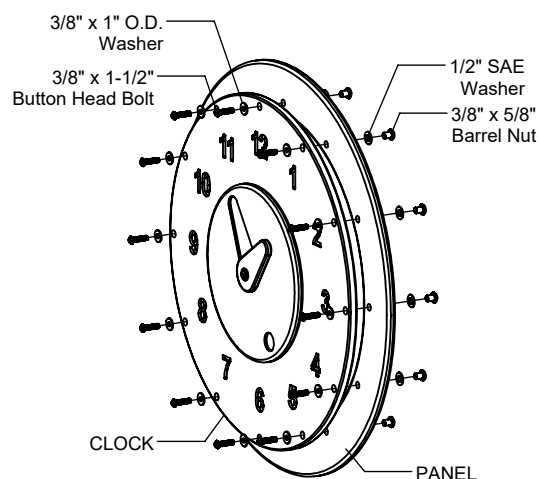


Figure 1.3

Step 2c

For Roto Event Panel Only

Attach Clock Panel to Roto Event Panel as shown in Figure 1.4 (See Note A).

Step 3

Fully tighten all fasteners according to the "TIGHTENING TORQUE FOR HARDWARE" section of the Installation Manual.

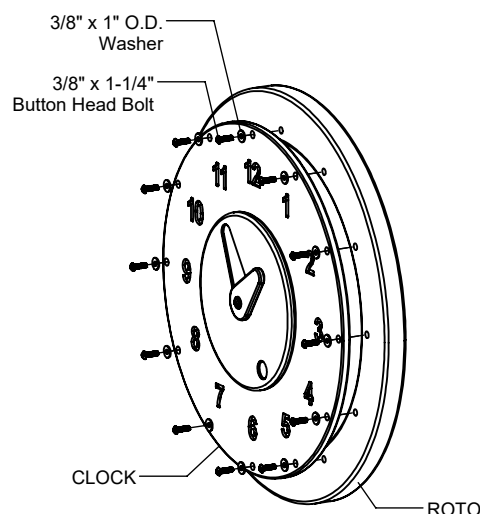


Figure 1.4

Parts List

STEEL MOUNT		
Part #	DESCRIPTION	QTY
9103032-TR	Bolt Button Head 3/8" x 3/4"	12
9333002	Washer Flat 3/8" x 1" O.D. x .100" thick	12
9345002	Washer Flat SAE 1/2"	12
9443022-TR	Nut Barrel 3/8" x 5/8" BH	12

HDPE MOUNT		
Part #	DESCRIPTION	QTY
9103072-TR	Bolt Button Head 3/8" x 1-1/2"	12
9333002	Washer Flat 3/8" x 1" O.D. x .100" thick	12
9345002	Washer Flat SAE 1/2"	12
9443022-TR	Nut Barrel 3/8" x 5/8" BH	12

ROTO MOUNT		
Part #	DESCRIPTION	QTY
9103062-TR	Bolt Button Head 3/8" x 1-1/4"	12
9333002	Washer Flat 3/8" x 1" O.D. x .100" thick	12

Assembled Parts List

Part #	DESCRIPTION	QTY
EF-4170-I	Clock Panel Insert R5	1
EG-8166-LH	Clock Panel Large Hand R3.5	1
EG-8166-SH	Clock Panel Small Hand R3.5	1
9103092-TR	Bolt Button Head 3/8" x 2"	1
9323092	Washer Fender 3/8" x 2"	2
9333002	Washer Flat 3/8" x 1" O.D. x .100" thick	1
9345002	Washer Flat SAE 1/2"	1
9443022-TR	Nut Barrel 3/8" x 5/8" BH	1

Specifications

CLOCK PANEL, LARGE & SMALL HAND PANELS:

Shall be made from high density 3/4" sheet plastic specially formulated for optimum UV stability and color retention.

HARDWARE:

Shall be stainless steel, zinc/nickel plated or galvanized as required to resist rust and corrosion.

Maintenance

Periodically tighten all screws, bolts and nuts. A periodic inspection of all parts is necessary. If a part is broken or worn, replace immediately. For general maintenance please refer to our Playground Maintenance Manual.