


**IMPORTANT NOTES: Read First**

(A) Use liquid thread lock (such as Loctite®) with all threaded hardware. **Important:** Liquid thread lock (prior to curing) helps to eliminate the common problem of "thread seizure" in stainless steel hardware by serving as a lubricant during assembly.

**FIGURE 1**  
Oak Tree Top

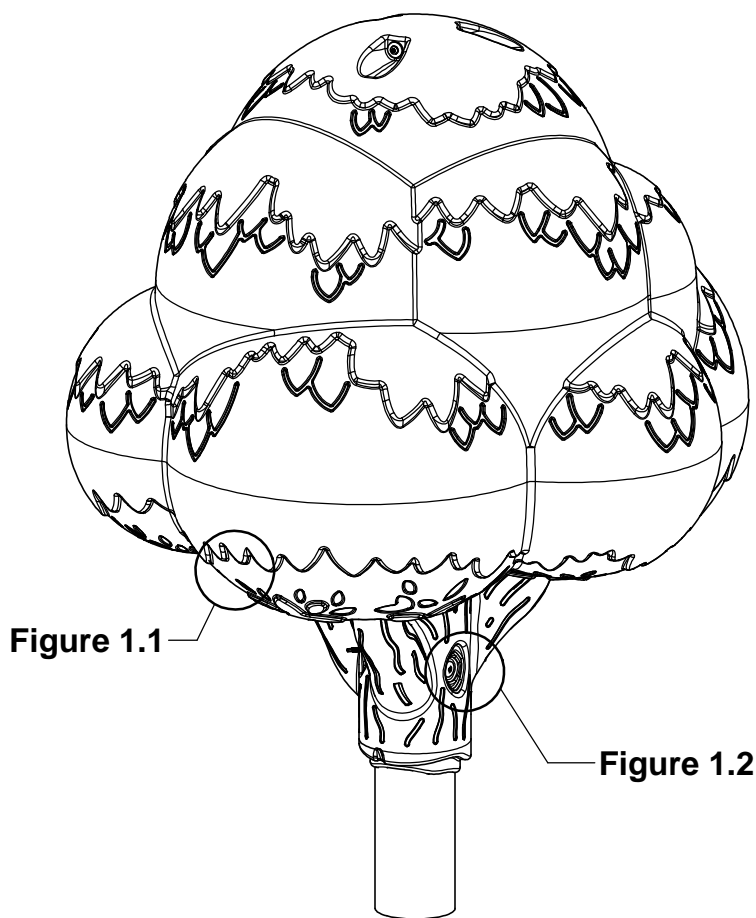

## Step 1

Attach Top Canopy to Top Branch as shown in Figure 1.1. (See Note A)

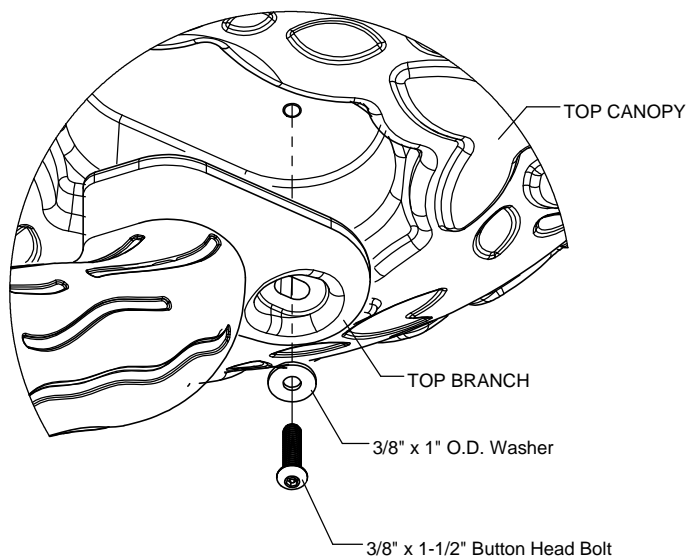


Figure 1.1

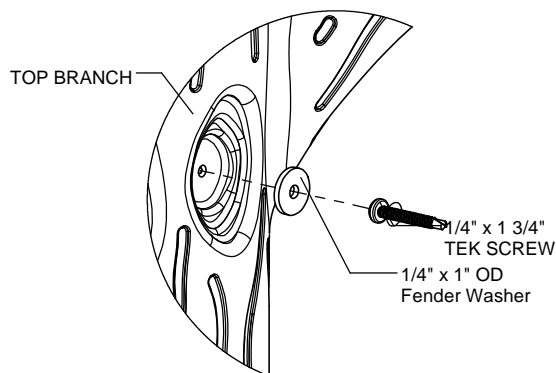


Figure 1.2

## Step 2

Orient Branch as desired and secure Oak Top components to post as shown in Figure 1.2.

## Step 3

Fully tighten all fasteners according to the "TIGHTENING TORQUE FOR HARDWARE" section of the installation guide.

## Parts List

Part #	DESCRIPTION	QTY.
DF-0023	Oak Top Canopy	1
DF-0024-P	Oak Top Branch Post Mount	1
9103072-TR	Bolt Button Head 3/8" x 1-1/2"	3
9271082-TR	1/4" x 1 3/4" Tek Screw	6
9321052-THK	Washer Fender 1/4" x 1" OD x .125" thk	6
9333002	Washer Flat 3/8" x 1" O.D. x .100" thick	3

## Specifications

### OAK TOP BRANCH & CANOPY:

Shall be constructed of UV-stabilized, rotationally molded, linear, low density polyethylene with an average wall thickness of .250".

### HARDWARE:

Shall be stainless steel, zinc/nickel plated or galvanized as required to resist rust and corrosion.

## Maintenance

Periodically tighten all screws, bolts and nuts. A periodic inspection of all parts is necessary. If a part is broken or worn, replace immediately. For general maintenance please refer to our Playground Maintenance Manual.