


IMPORTANT NOTES: Read First

- (A) Use liquid thread lock (such as Loctite®) with all threaded hardware. **Important:** Liquid thread lock (prior to curing) helps to eliminate the common problem of "thread seizure" in stainless steel hardware by serving as a lubricant during assembly.
- (B) Refer to Installation Manual for R3.5-09 Collars and R3.5-11 Socket Clamps assembly instructions.
- (C) Use appropriate compliant protective surfacing and adjust footing depths accordingly. See free publication - The Handbook for Public Playground Safety, Publication #325 at www.CPSC.gov for the surfacing appropriate for the fall height of the equipment or consult you surfacing supply representative.

FIGURE 1
TRIPLE SLIDE ENTRY

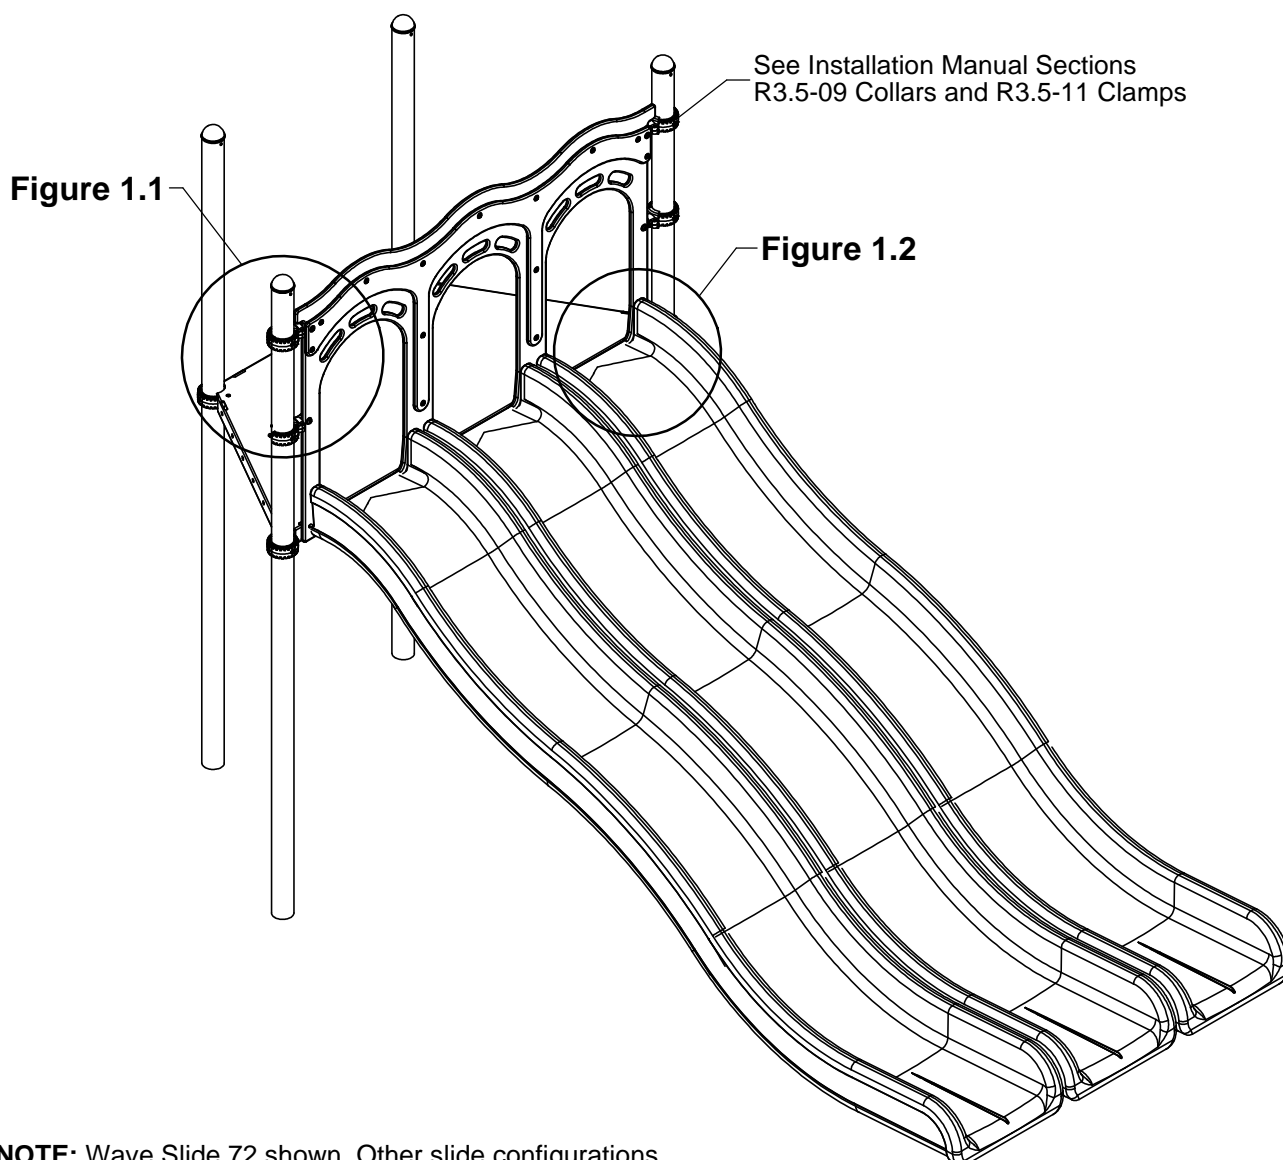

NOTE: Wave Slide 72 shown. Other slide configurations will vary slightly, but will not affect the assembly.



Manufactured by Krauss Craft, Inc.
www.playcraftsystems.com


For Customer Service Call
800.333.8519 (U.S.A.) or
541.955.9199 (International)

Rev C
2/27/2009


Step 1

Locate and attach collars as shown in Side Elevation.
(See Note B)

SIDE ELEVATION

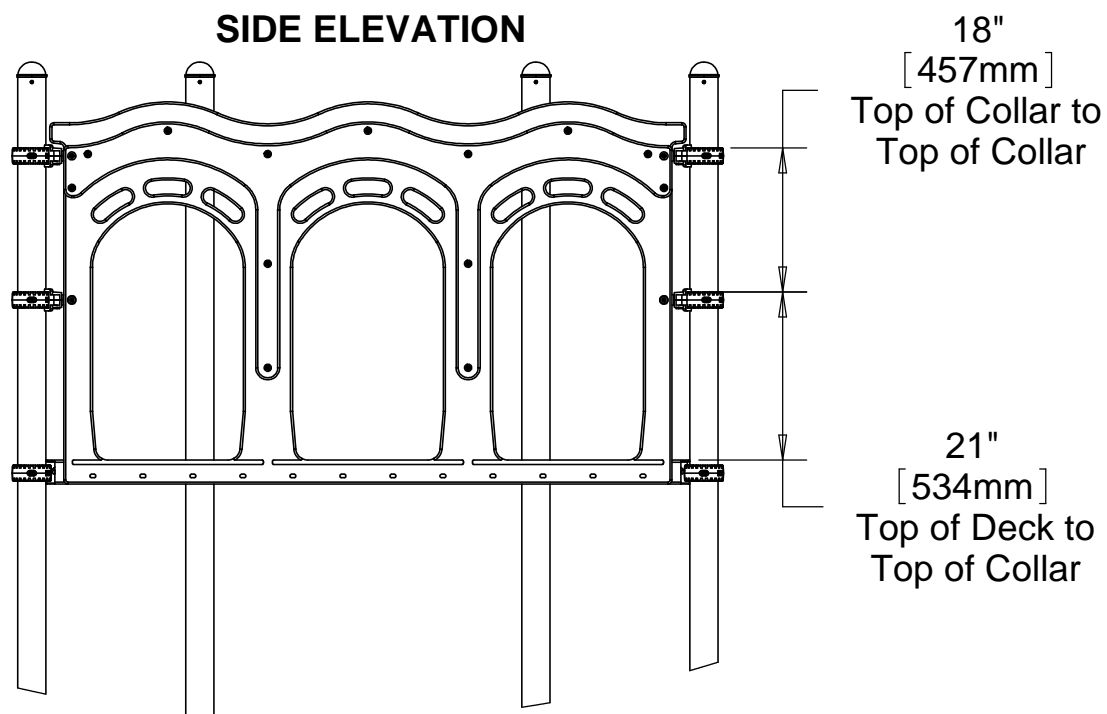

TOP VIEW
FOOTING CENTERS

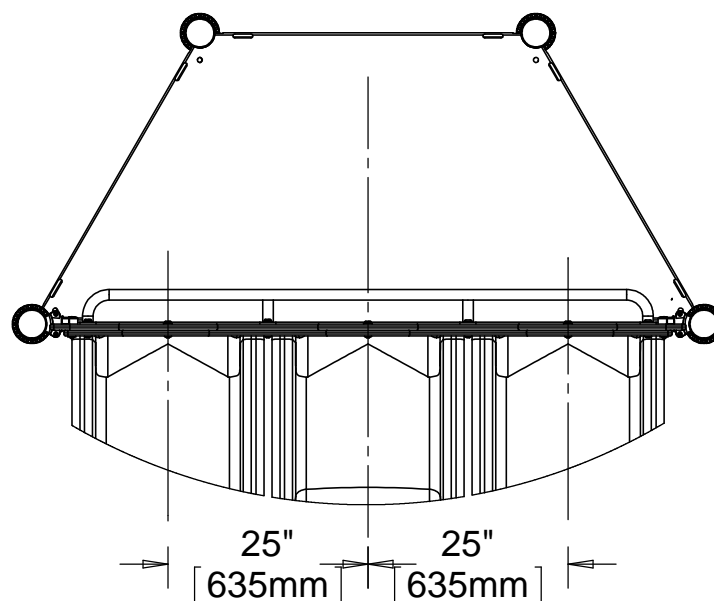

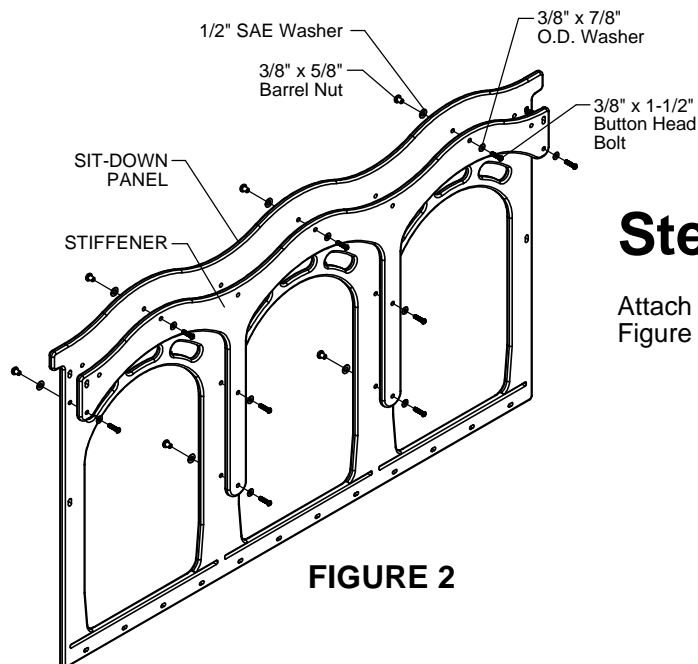


FIGURE 2

Step 2 (Factory Assembled)

Attach Stiffener to Sit-Down Panel as shown in Figure 2. (See Note A)

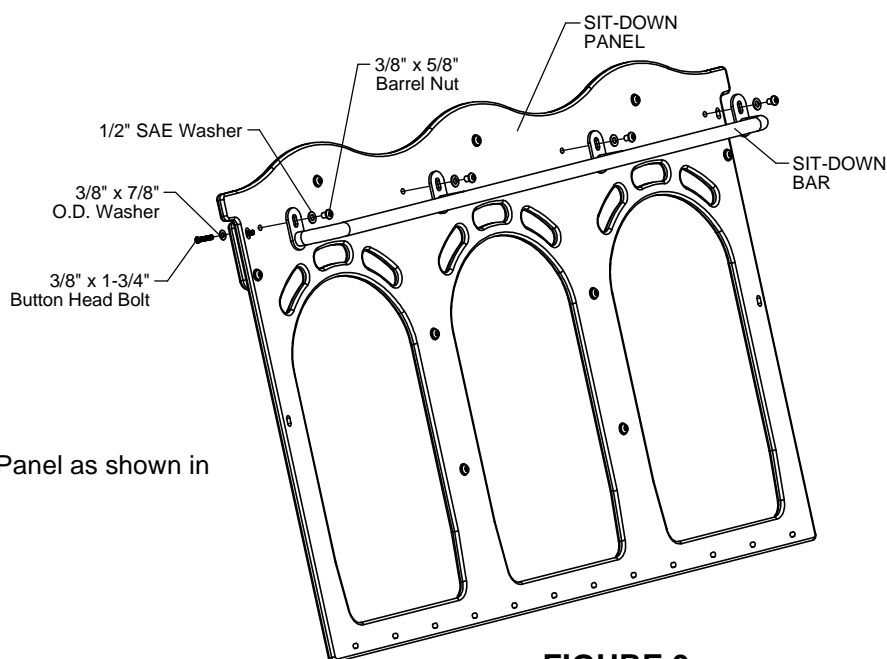


FIGURE 3

Step 3

Attach Sit-Down Bar to Sit-Down Panel as shown in Figure 3. (See Note A)

Step 4

Attach Sit-Down Panel to collars as shown in Figure 1.1.
(See Notes A and B)

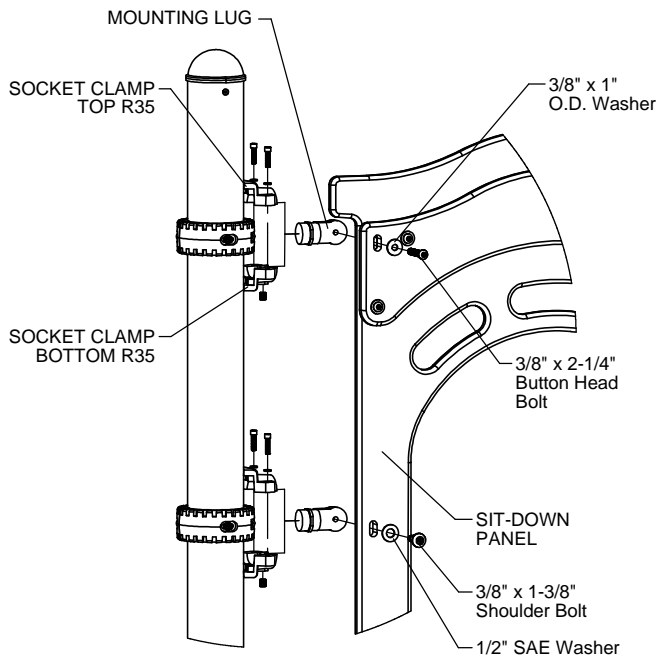


Figure 1.1

Step 5

Attach Slide and Sit-Down Panel to Deck as shown in Figure 1.2. (See Note A)

NOTE: Use (12) 3/8" x 2-1/2" Button Head Bolts included with Triple Sit-Down Panel in place of standard slide mounting hardware.

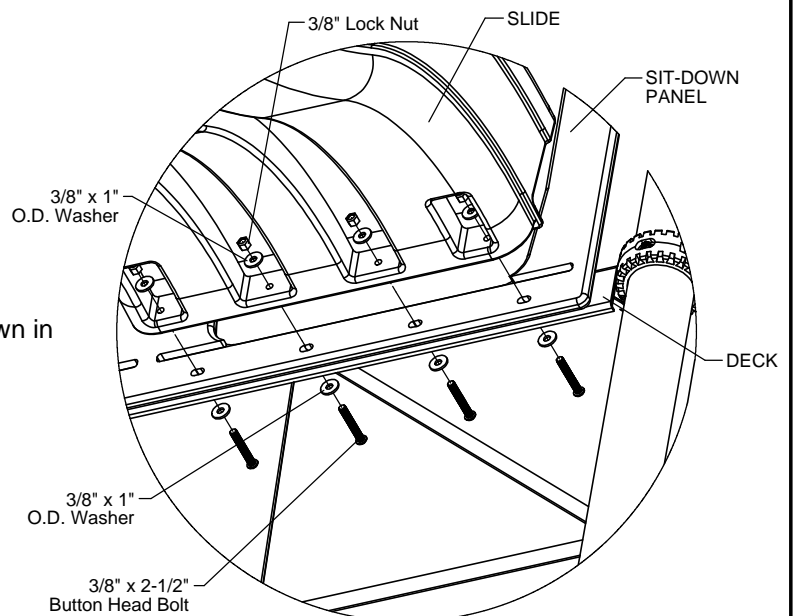


Figure 1.2

Step 6

Fully tighten all fasteners according to the "TIGHTENING TORQUE FOR HARDWARE" section of the Installation Manual.

Specifications

TRIPLE SIT-DOWN PANEL & STIFFENER:

Shall be made from high density 3/4" sheet plastic specially formulated for optimum UV stability and color retention.

TRIPLE SIT-DOWN BAR:

Shall be fabricated from 1.315" O.D. 12 gauge steel tubing and welded to 1/4" thick steel tabs. Shall have a multi-stage baked-on powder coat finish.

MOUNTING LUGS:

Shall be precision die-cast from a high-strength aluminum alloy. The Mounting Lugs have a multi-stage baked-on powder coat finish.

HARDWARE:

Shall be stainless steel, zinc/nickel plated or galvanized as required to resist rust and corrosion.

Parts List

Part #	DESCRIPTION	QTY.
008113	Mounting Lug R35	4
FS-1319-R35	Triple Sit-Down Bar R35	1
R35-11	R35 Socket Clamp Set	4
9103082-TR	Bolt Button Head 3/8" x 1-3/4"	4
9103102-TR	Bolt Button Head 3/8" x 2-1/4"	2
9103112-TR	Bolt Button Head 3/8" x 2-1/2"	12
9143062-TR	Bolt Shoulder 3/8" x 1-3/8" BH	2
9333002	Washer Flat 3/8" x 1" O.D. x .100" thick	2
9333042	Washer Flat 3/8" x 7/8" O.D.	4
9345002	Washer Flat SAE 1/2"	6
9443022-TR	Nut Barrel 3/8" x 5/8" BH	4

Assembled Parts List

Part #	DESCRIPTION	QTY.
008241	Triple Sit-Down Panel R35	1
008241-S	Triple Slide Stiffener R35	1
9103072-TR	Bolt Button Head 3/8" x 1-1/2"	9
9333042	Washer Flat 3/8" x 7/8" O.D.	9
9345002	Washer Flat SAE 1/2"	9
9443022-TR	Nut Barrel 3/8" x 5/8" BH	9

Maintenance

Periodically tighten all screws, bolts and nuts. A periodic inspection of all parts is necessary. If a part is broken or worn, replace immediately. For general maintenance please refer to our Playground Maintenance Manual.



Manufactured by Krauss Craft, Inc.
www.playcraftsystems.com

For Customer Service Call
800.333.8519 (U.S.A.) or
541.955.9199 (International)

Rev C
2/27/2009