


IMPORTANT NOTES: Read First

(A) An appropriate energy absorbing safety surface is required under and around all playground equipment. Loose fill protective surfacing is shown only as an example for the purpose of this assembly instruction. Other surfacing material may vary in thickness and/or compression depths. See free publication - The Handbook for Public Playground Safety, Publication #325 at www.cpsc.gov for the surfacing appropriate for the fall height of the equipment or consult your surfacing supply representative.

FIGURE 1
Launch Pad

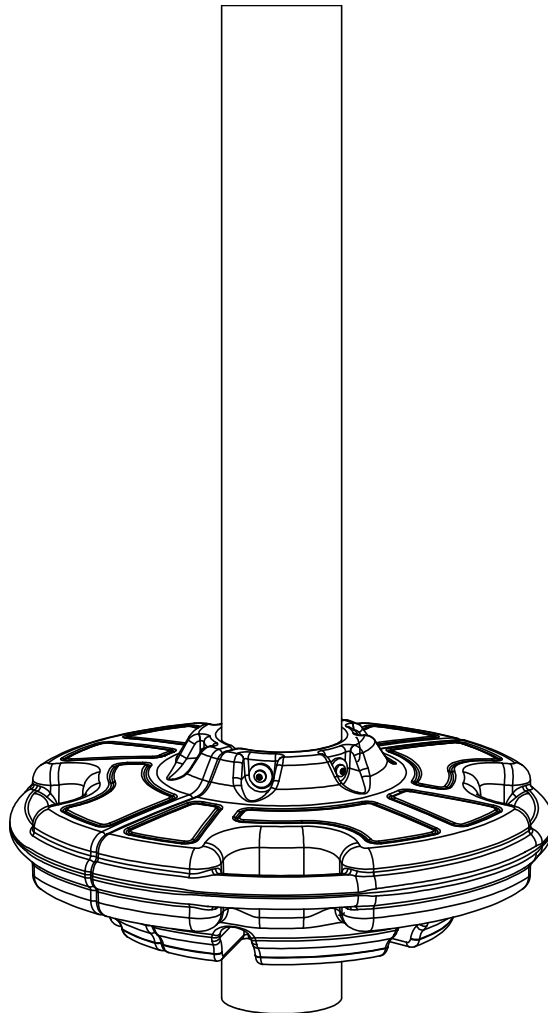

Step 1

Attach Launch Pads to Post as shown in Figure 2.

Step 2

Place required protective surfacing under and around Launch Pad Step. (See Note A)

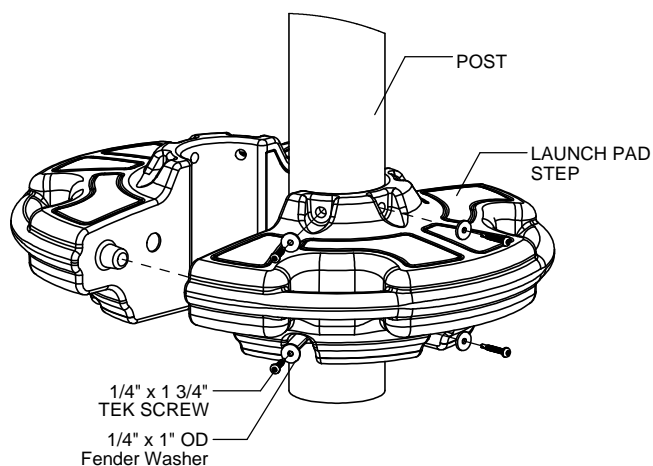


FIGURE 2

Parts List

Part #	DESCRIPTION	QTY
DH-0001	Launch Pad Step Half	2
9271082-TR	1/4" x 1 3/4" Tek Screw	12
9321052-THK	Washer Fender 1/4" x 1" OD x .125" thk	12

Specifications

LAUNCH PAD STEP HALF:

Shall be constructed of UV-stabilized, rotationally molded, linear, low density polyethylene with an average wall thickness of .250".

HARDWARE:

Shall be stainless steel, zinc/nickel plated or galvanized as required to resist rust and corrosion.

Maintenance

Periodically tighten all screws, bolts and nuts. A periodic inspection of all parts is necessary. If a part is broken or worn, replace immediately. For general maintenance please refer to our Playground Maintenance Manual.