


IMPORTANT NOTES: Read First

(A) Use liquid thread lock (such as Loctite®) with all threaded hardware. **Important:** Liquid thread lock (prior to curing) helps to eliminate the common problem of "thread seizure" in stainless steel hardware by serving as a lubricant during assembly.

(B) Refer to Installation Manual for R3.5-09 Collars and R3.5-11 Socket Clamps installation instructions.

(C) All gaps created (e.g. between panels, between panel and deck, between panel and roof, etc.) must be less than 3-1/2" [89mm] or greater than 9" [229mm].

FIGURE 1
R3.5 Wall Access

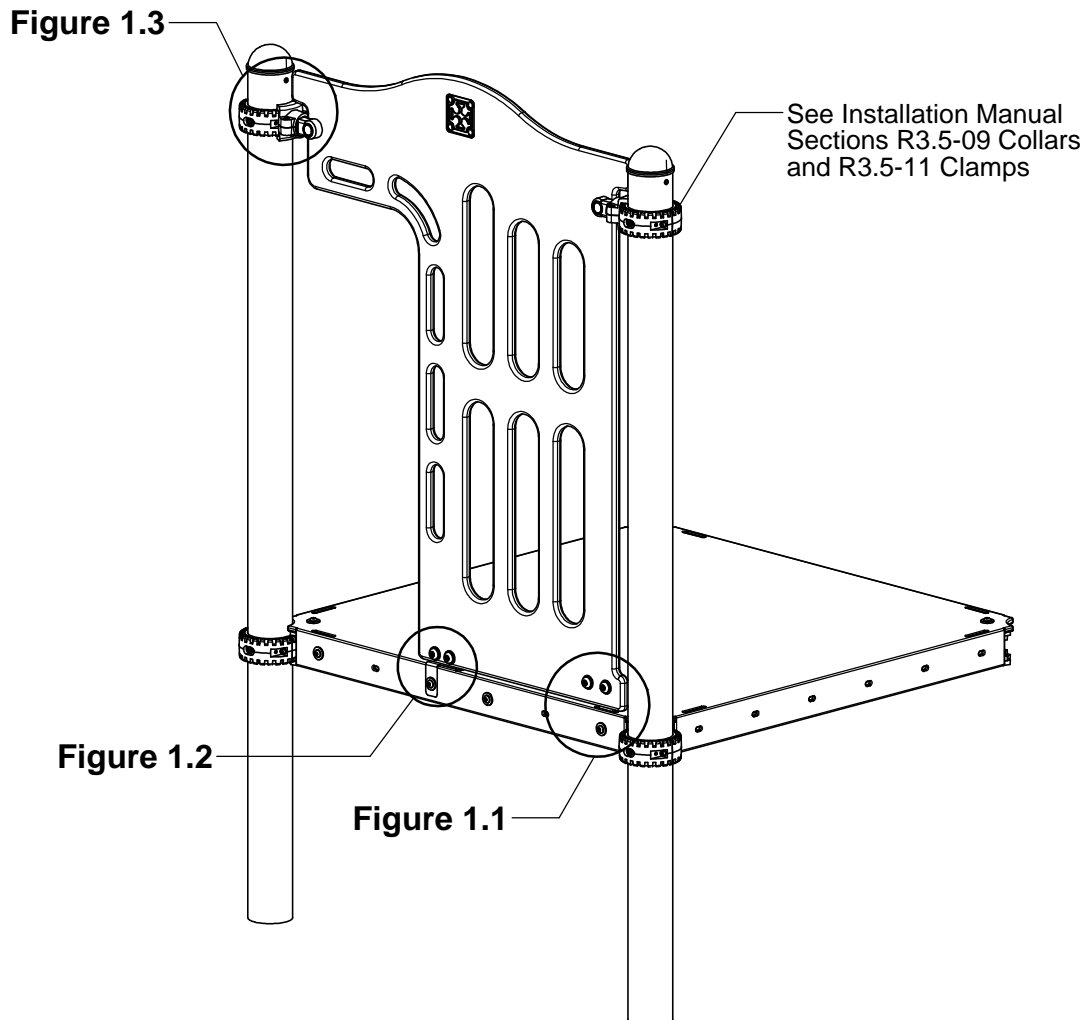

NOTE: R3.5 Access Panel Left shown. Other configurations will vary slightly, but does not affect assembly.

Step 1

Referring to Elevation View, locate and attach collars to posts. (See Notes B & C)

* Height shown from top of deck to top of collar.

Elevation View

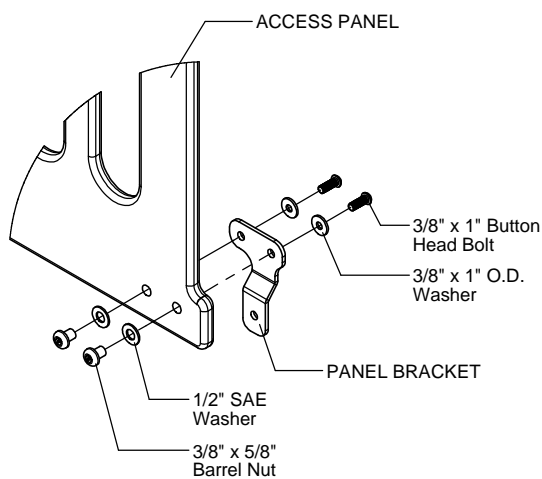
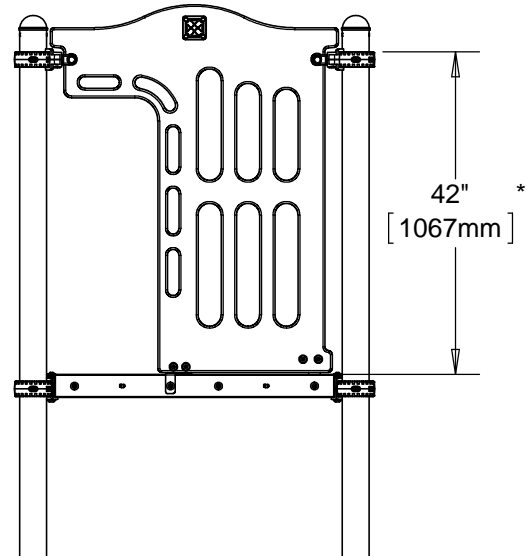


Figure 1.1

Step 2

Attach Panel Bracket to Access Panel as shown in Figure 1.1. (See Note A)

Step 3

Attach Roto Panel Bracket to Access Panel as shown in Figure 1.2. (See Note A)

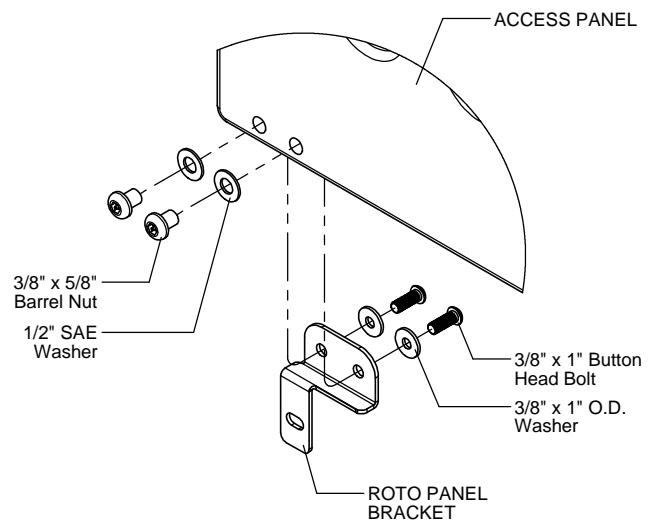


Figure 1.2

Step 4

Attach Panel Brackets to deck as shown in Figure 2. (See Note A)

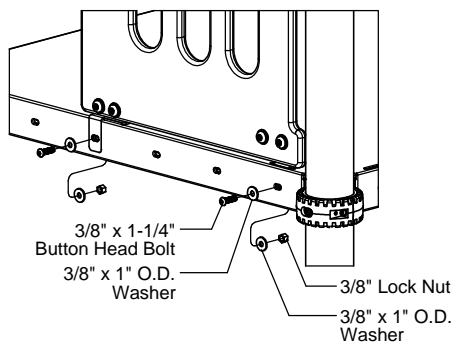


FIGURE 2

Step 5

Attach Access Panel to collars as shown in Figure 1.3. (See Notes A & B)

Step 6

Fully tighten all fasteners according to the "TIGHTENING TORQUE FOR HARDWARE" section of the Installation Manual.

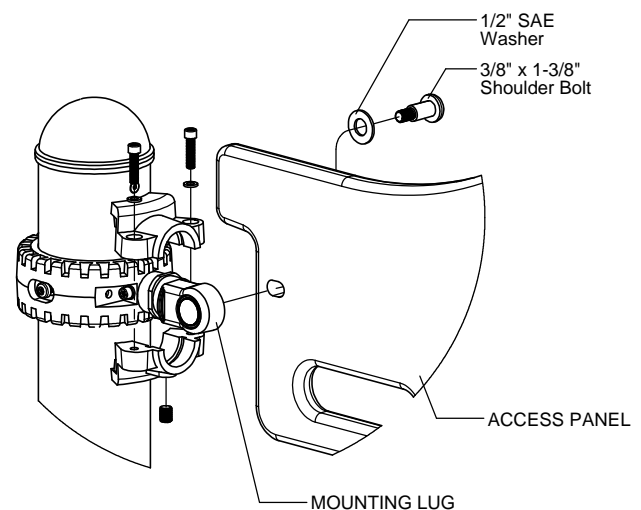


Figure 1.3

Parts List

WALL ACCESS LEFT		
Part #	DESCRIPTION	QTY.
BE-0361-R	R35 Panel Bracket - Right	1
BF-7117-R	Roto Panel Bracket Right (R5)	1
EG-8247	R3.5 Access Panel	1
GG-8113	Mounting Lug R3.5	2
HS-1001-R35	Socket Clamp Set R3.5	2
9103052-TR	Bolt Button Head 3/8" x 1"	4
9103062-TR	Bolt Button Head 3/8" x 1-1/4"	2
9143062-TR	Bolt Shoulder 3/8" x 1-3/8" BH	2
9333002	Washer Flat 3/8" x 1" O.D. x .100" thick	8
9345002	Washer Flat SAE 1/2"	6
9413002	Nut Lock 3/8"	2
9443022-TR	Nut Barrel 3/8" x 5/8" BH	4

WALL ACCESS RIGHT		
Part #	DESCRIPTION	QTY.
BE-0361-L	R35 Panel Bracket - Left	1
BF-7117-L	Roto Panel Bracket Left (R5)	1
EG-8247	R3.5 Access Panel	1
GG-8113	Mounting Lug R3.5	2
HS-1001-R35	Socket Clamp Set R3.5	2
9103052-TR	Bolt Button Head 3/8" x 1"	4
9103062-TR	Bolt Button Head 3/8" x 1-1/4"	2
9143062-TR	Bolt Shoulder 3/8" x 1-3/8" BH	2
9333002	Washer Flat 3/8" x 1" O.D. x .100" thick	8
9345002	Washer Flat SAE 1/2"	6
9413002	Nut Lock 3/8"	2
9443022-TR	Nut Barrel 3/8" x 5/8" BH	4

Specifications

R3.5 ACCESS PANEL:

Shall be made from high density 3/4" sheet plastic specially formulated for optimum UV stability and color retention.

R3.5 PANEL BRACKET:

Shall be precision cut and formed from 3/16" thick sheet steel. The R3.5 Panel Bracket shall have a multi-stage baked-on powder coat finish.

ROTO PANEL BRACKET R5:

Shall be punched and formed from 10 gauge sheet steel. The Roto Panel Bracket R5 shall have a multi-stage baked-on powder coat finish.

MOUNTING LUGS:

Shall be precision die-cast from a high-strength aluminum alloy. The Mounting Lugs have a multi-stage baked-on powder coat finish.

SOCKET CLAMPS:

Shall be two-part and precision die-cast from a high strength aluminum alloy. The Socket Clamps have a multi-stage baked-on powder coat finish.

HARDWARE:

Shall be stainless steel, zinc/nickel plated or galvanized as required to resist rust and corrosion.

Maintenance

Periodically tighten all screws, bolts and nuts. A periodic inspection of all parts is necessary. If a part is broken or worn, replace immediately. For general maintenance please refer to our Playground Maintenance Manual.



Manufactured by Krauss Craft, Inc.
www.playcraftsystems.com

For Customer Service Call
800.333.8519 (U.S.A.) or
541.955.9199 (International)

Rev D
10/13/2014