

Burma Bridge (Pg. R3.5-1509) Assembly View


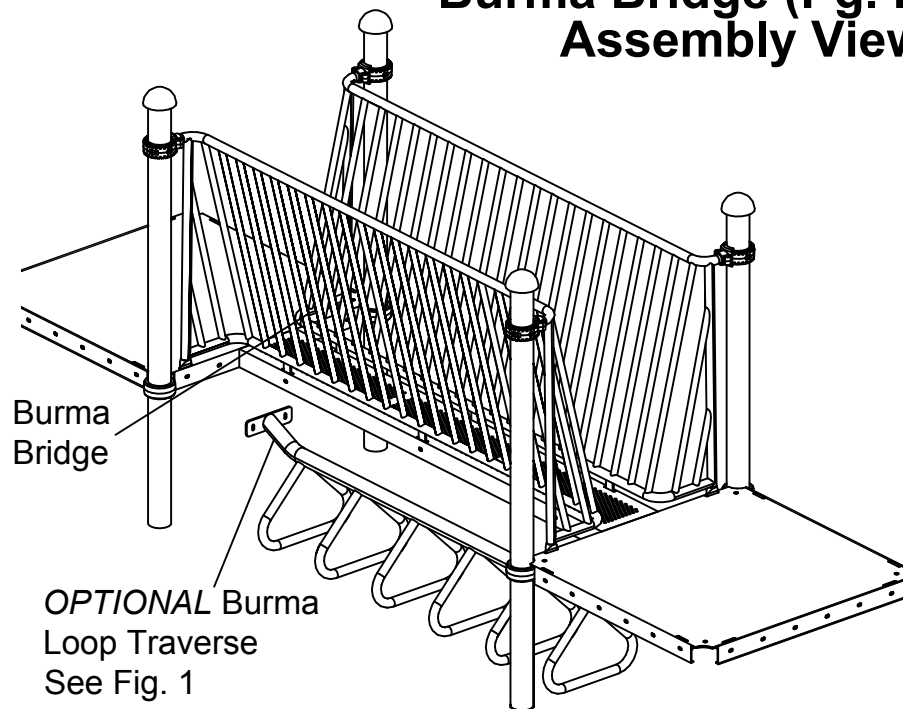


Fig. 1
Underside
View

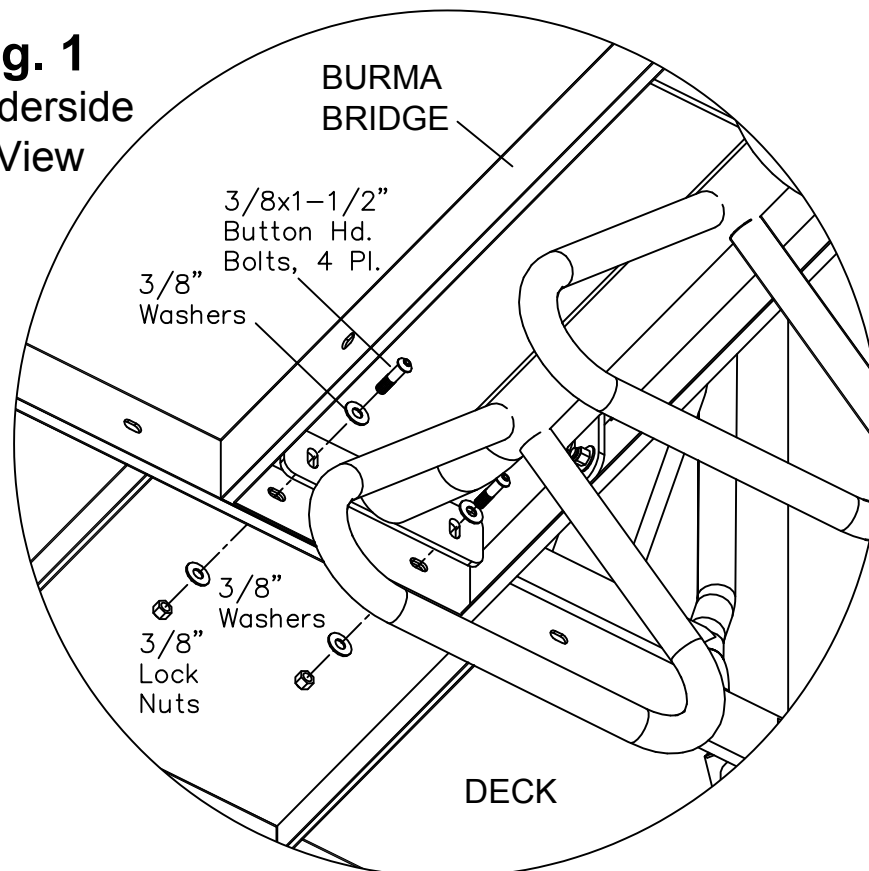

Parts List

<u>QTY.</u>	<u>DESCRIPTION</u>	<u>PART #</u>
1	Burma Loop Traverse	FS-1428-R35
4	3/8x1-1/2" Button Hd Bolts	9103072-TR

NOTE:

All washers and lock nuts for attachment is provided with Burma Bridge (see assembly Page 1509).

Installation

Notes:

(A) Use liquid thread lock (such as Loctite) with all threaded hardware that does not include self-locking nuts.

(B) Bolts should not protude more than two threads beyond nut.

Step 1.

Connect Burma Traverse ends through Burma Bridge and Deck with hardware shown as shown in Figure 1.

Step 2.

Proceed to Step 2 on Burma Bridge Assembly Page R3.5-1509

Specifications

BURMA LOOP TRAVERSE:

Center support beam shall be 10 ga. 2" steel tubing welded to mounting plates. Loop are form 1" Std. pipe welded to beam. Loop Traverse beam is powdercoated

HARDWARE:

Shall be zinc/nickel plated, galvanized or stainless steel as required to resist rust and corrosion.

Maintenance

Periodically tighten all screws, bolts and nuts.
A periodic inspection of all parts is necessary.
If a part is broken or worn, replace immediately.