

### IMPORTANT NOTES: Read First


(A) Use liquid thread lock (such as Loctite®) with all threaded hardware. **Important:** Liquid thread lock (prior to curing) helps to eliminate the common problem of "thread seizure" in stainless steel hardware by serving as a lubricant during assembly.

(B) Refer to Installation Manual for R5-09 Collars and R5-11 Socket Clamps installation instructions.

**FIGURE 1**  
Accelerator Slide  
Sit Down Hood

**Figure 1.1**  
See Installation Manual  
Sections R5-09 Collars  
and R5-11 Clamps

**Figure 1.2**

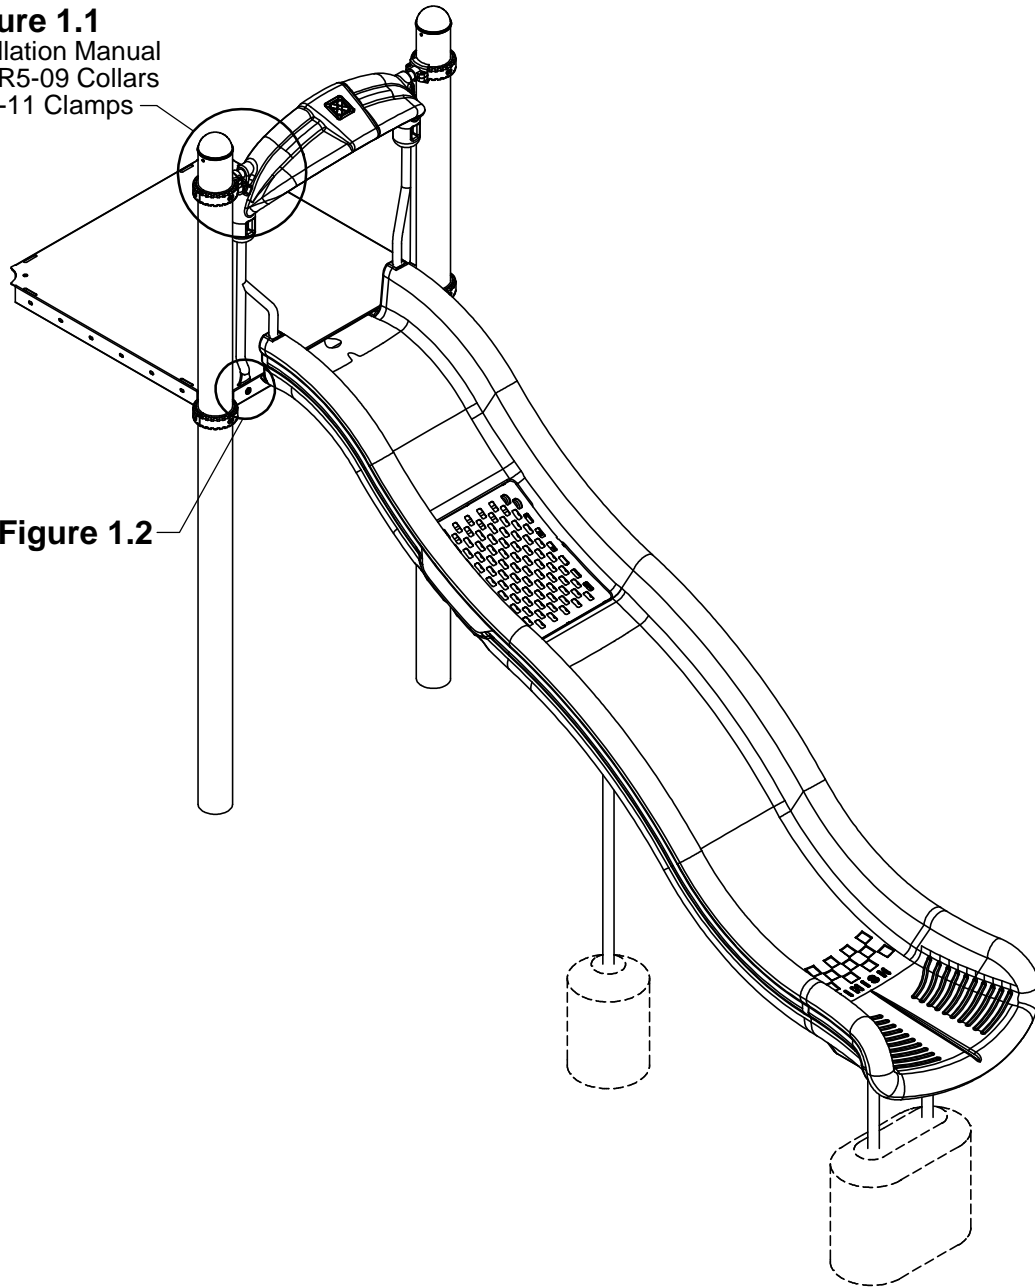

### Step 1

Locate and attach collars at the height shown in Side Elevation. (See Note B)

\* Height shown from top of deck to top of collar.


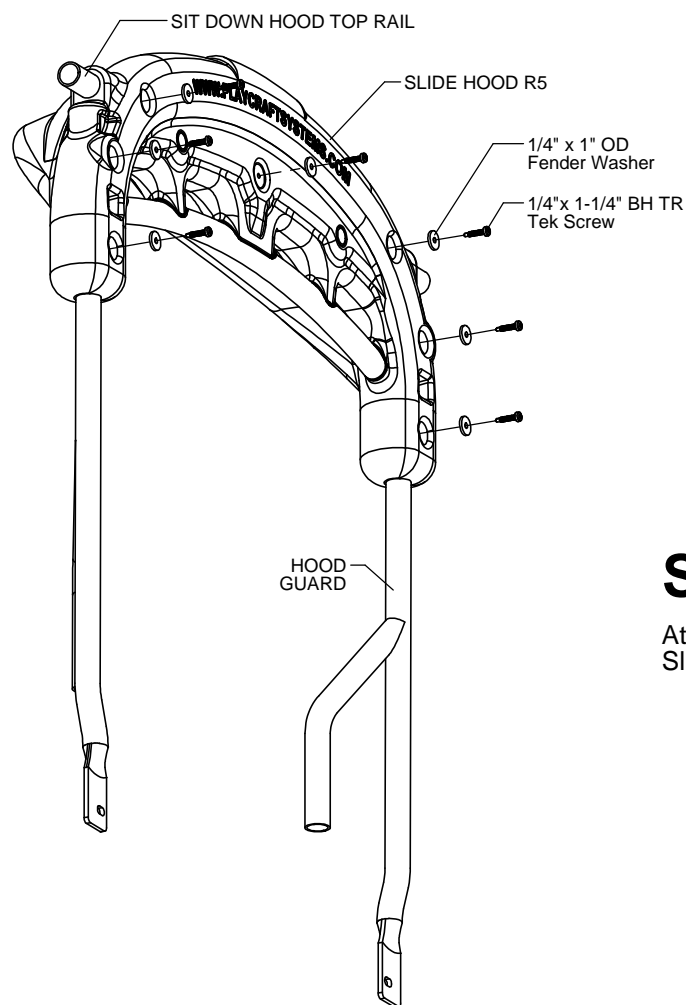


FIGURE 2

### Side Elevation

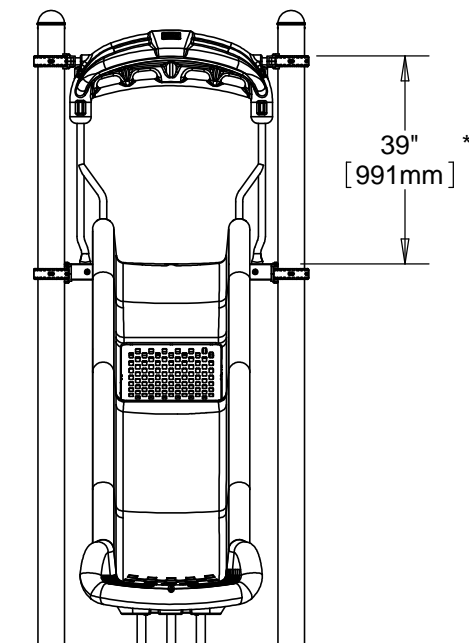

### Step 2 (Factory Assembled)

Attach Hood Guards and Sit Down Hood Top Rail to Slide Hood as shown in Figure 2.

### Step 3

Insert Hood Guard Tabs into deck slots and attach Slide Hood to collars as shown in Figure 1.1. (See Note B)

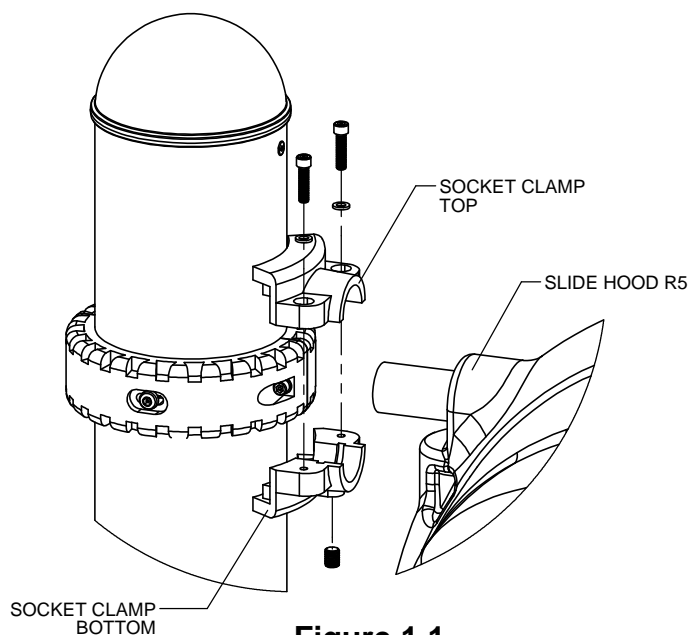


Figure 1.1

### Step 4

Attach Hood Guards to deck as shown in Figure 1.2.  
(See Note A)

### Step 5

Fully tighten all fasteners according to the  
"TIGHTENING TORQUE FOR HARDWARE"  
section of the Installation Manual.

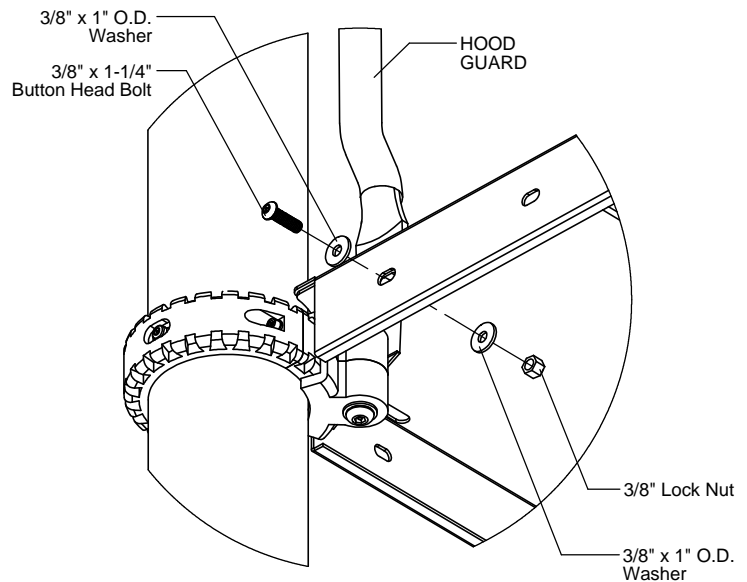


Figure 1.2

### Parts List

Part #	DESCRIPTION	QTY.
HS-1001-R5	Socket Clamp Set R5	2
9103062-TR	Bolt Button Head 3/8" x 1-1/4"	2
9333002	Washer Flat 3/8" x 1" O.D. x .100" thick	4
9413002	Nut Lock 3/8"	2

### Assembled Parts List

Part #	DESCRIPTION	QTY.
DF-4827	Slide Hood R5	1
FS-1303-R5ACL	Sit Down Hood Guard Single Accelerator R5	2
LF-0009	Sit Down Hood - Top Rail	1
9271062-TR	Screw Tek 1/4" x 1-1/4" BH TR	7
9321052-THK	Washer Fender 1/4" x 1" OD x .125" thk	7

### Specifications

#### SLIDE HOOD R5:

Shall be constructed of UV-stabilized, rotationally molded, linear, low density polyethylene with an average wall thickness of .250".

#### SIT DOWN HOOD - TOP RAIL:

Shall be cut from 1.315" O.D. 12 gauge steel tubing. The Sit Down Hood - Top Rail shall have a multi-stage baked-on powder coat finish.

#### SIT DOWN HOOD GUARD SINGLE ACCELERATOR:

Shall be made from 1.315" O.D. 12 gauge steel tubing. The Sit Down Hood Guard Single Accelerator shall have a multi-stage baked-on powder coat finish.

#### HARDWARE:

Shall be stainless steel, zinc/nickel plated or galvanized as required to resist rust and corrosion.

### Maintenance

Periodically tighten all screws, bolts and nuts. A periodic inspection of all parts is necessary. If a part is broken or worn, replace immediately. For general maintenance please refer to our Playground Maintenance Manual.