


IMPORTANT NOTES: Read First

(A) Use liquid thread lock (such as Loctite®) with all threaded hardware. **Important:** Liquid thread lock (prior to curing) helps to eliminate the common problem of "thread seizure" in stainless steel hardware by serving as a lubricant during assembly.

(B) Refer to Installation Manual for R5-1109 Balcony Deck, R5-09 Collars and R5-11 Socket Clamps assembly instructions.

(C) An appropriate energy absorbing safety surface is required under and around all playground equipment. Loose fill protective surfacing is shown only as an example for the purpose of this assembly instruction. Other surfacing material may vary in thickness and/or compression depths. See free publication - The Handbook for Public Playground Safety, Publication #325 at www.cpsc.gov for the surfacing appropriate for the fall height of the equipment or consult your surfacing supply representative.

FIGURE 1
Tube Slide Wall Silo R5

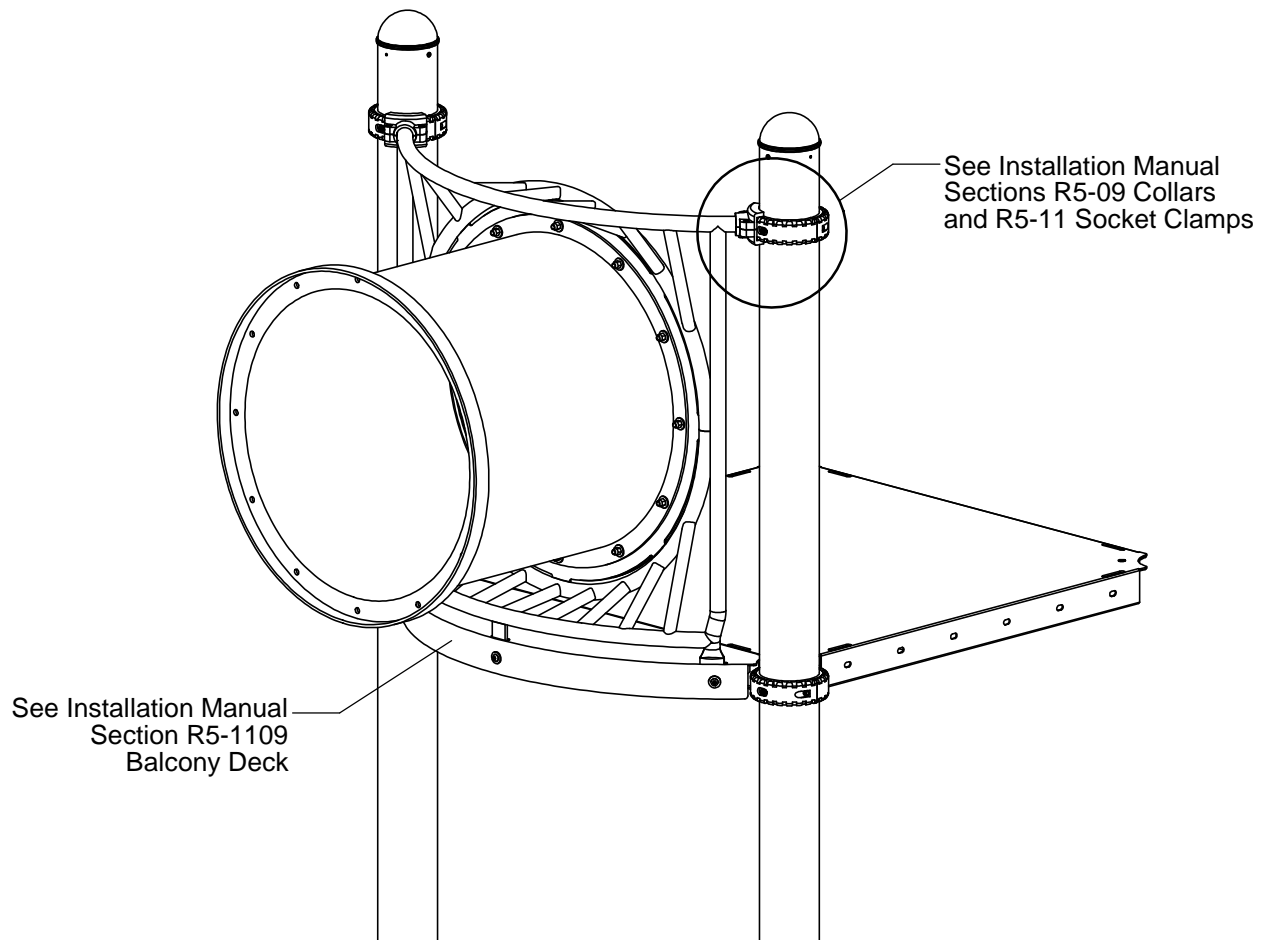

Step 1

Attach Tube Slide Silo Wall to Deck and Posts.
(See Note B)

Step 2

Refer to Tube Slide installation instructions for tube type and tube orientation. Attach tube to Tube Slide Silo Wall as shown in Figure 2.
(See Note A)

Step 3

Fully tighten all fasteners according to the "TIGHTENING TORQUE FOR HARDWARE" section of the Installation Manual.

Step 4

Place required protective surfacing under and around Tube Slide Silo Wall R5. (See Note C)

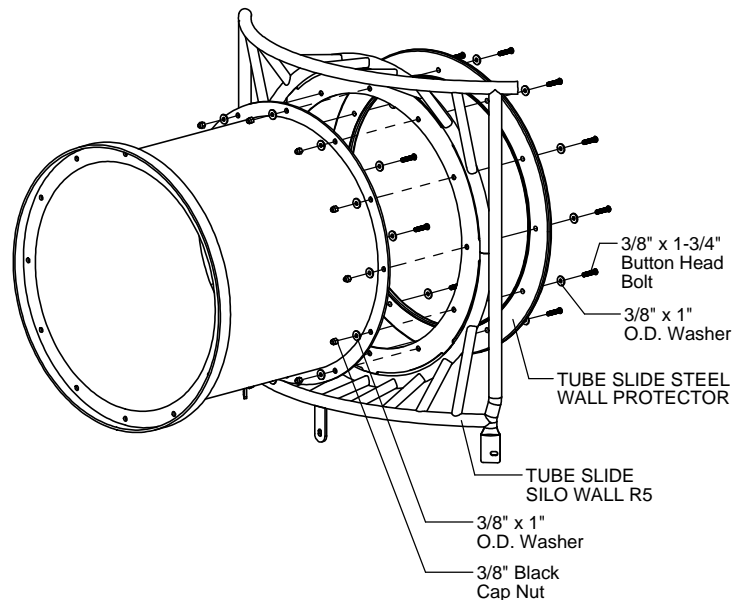


FIGURE 2

Parts List

Part #	DESCRIPTION	QTY.
EE-7253	Tube Slide Steel Wall Protector	1
FS-1341-R5	Tube Slide Silo Wall R5	1
9103082-TR	Bolt Button Head 3/8" x 1-3/4"	12
9333002	Washer Flat 3/8" x 1" O.D. x .100" thick	24
9413162-BLK	Nut Lock 3/8" w/ Black Cap	12

Specifications

TUBE SLIDE SILO WALL R5:

Shall be from 1.315" O.D. 11 gauge tube steel outer rails and inner support and 1.029" O.D. 12 gauge rungs with a 10 gauge sheet steel Tube Mount Flange. The Tube Slide Silo Wall R5 will have a multi-stage baked-on powder coat finish.

TUBE SLIDE STEEL WALL PROTECTOR:

Shall be made from high density 3/4" sheet plastic specially formulated for optimum UV stability and color retention.

Maintenance

Periodically tighten all screws, bolts and nuts. A periodic inspection of all parts is necessary. If a part is broken or worn, replace immediately. For general maintenance please refer to our Playground Maintenance Manual.