


IMPORTANT NOTES: Read First

(A) Use liquid thread lock (such as Loctite®) with all threaded hardware. **Important:** Liquid thread lock (prior to curing) helps to eliminate the common problem of "thread seizure" in stainless steel hardware by serving as a lubricant during assembly.

FIGURE 1
Revolution Post Top Cap

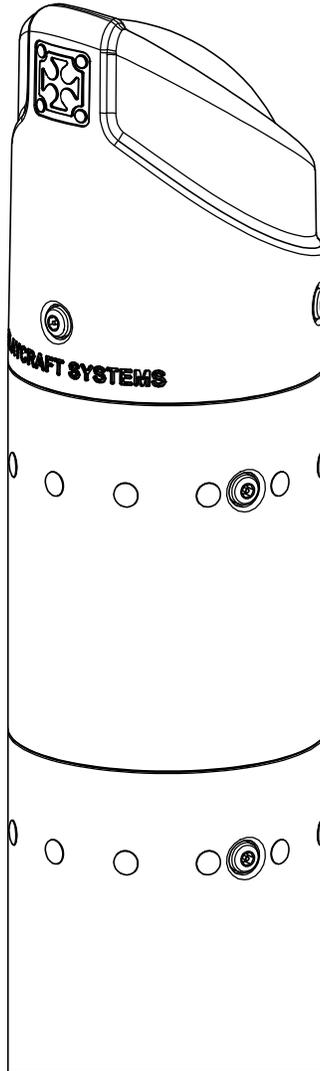

NOTE: Revolution Post Top Cap shown. Other configurations will vary slightly, but does not affect assembly.

Step 1

Rotate Post Top Cap to desired facing and secure as shown in Figure 2.

NOTE: Refer to Playground Equipment Manual for suggested Post Top Cap facing.

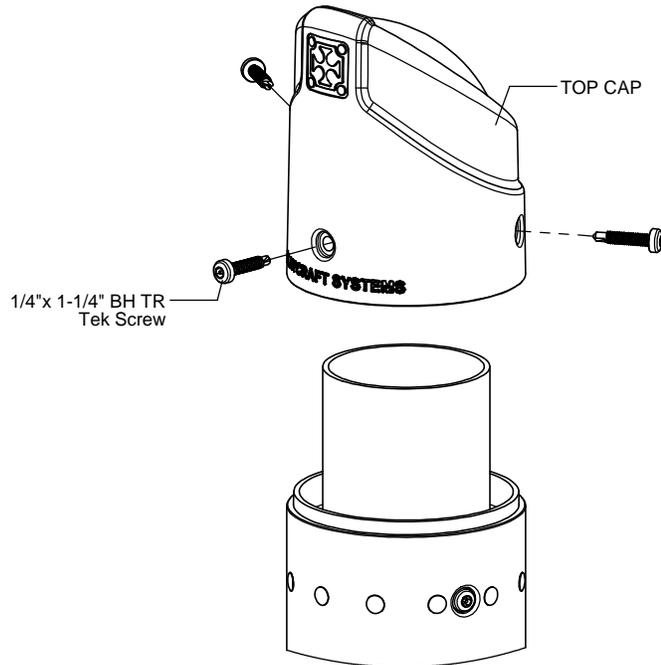


FIGURE 2

Parts List

Part #	DESCRIPTION	QTY
GH-0002	Revolution Post Top Cap	1
9271062-TR	Screw Tek 1/4" x 1-1/4" BH TR	3

Specifications

REVOLUTION POST TOP CAP:

Shall be precision die-cast from a high-strength aluminum alloy. The Revolution Post Top Cap shall have a multi-stage baked-on powder coat finish.

HARDWARE:

Shall be stainless steel, zinc/nickel plated or galvanized as required to resist rust and corrosion.

Maintenance

Periodically tighten all screws, bolts and nuts. A periodic inspection of all parts is necessary. If a part is broken or worn, replace immediately. For general maintenance please refer to our Playground Maintenance Manual.

