

IMPORTANT NOTES: Read First


(A) Use liquid thread lock (such as Loctite®) with all threaded hardware. **Important:** Liquid thread lock (prior to curing) helps to eliminate the common problem of "thread seizure" in stainless steel hardware by serving as a lubricant during assembly.

(B) This Assembly requires additional Assembly Pages. See also Assembly Page R5-09 Collars and R5-11 Socket Clamps.

(C) Collar Locations : Collars measure 33-5/8" from top of lower collar to top of upper collar.
Under Deck Installation: Make sure distance between the bottom of the deck and the top of the panel(s) is less than 3-1/2" or greater than 9" to avoid head and neck entrapment.

(D) Use appropriate compliant protective surfacing and adjust footing depths accordingly. See free publication - The Handbook for Public Playground Safety, Publication #325 at www.CPSC.gov for the surfacing appropriate for the fall height of the equipment or consult you surfacing supply representative.

Assembly View

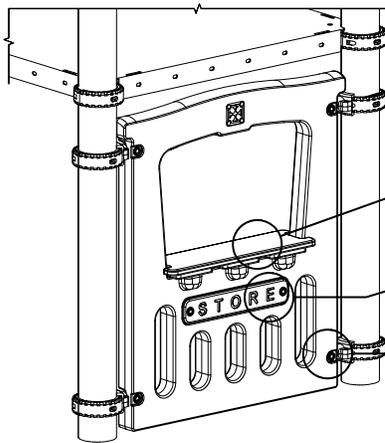


See Assembly Page R5-09 Collars and R5-11 Socket Clamps

See Figure 1
Counter Set to Panel Connection

See Figure 2
"STORE" Plaque to Panel Connection


See Figure 3
Mounting Lug Connection

*Dimension given is from Top of Lower Collar to Top of Upper Collar

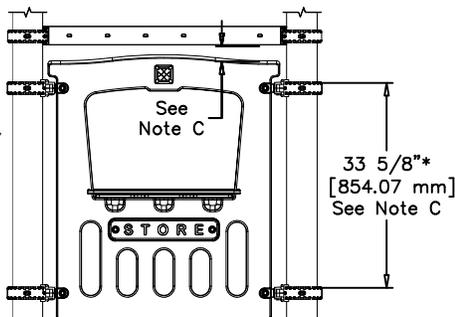

Elevation

Front View

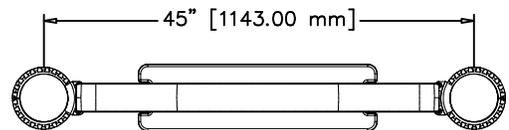

Post Spacing

Top View

Figure 1

Counter Set to Panel Connection

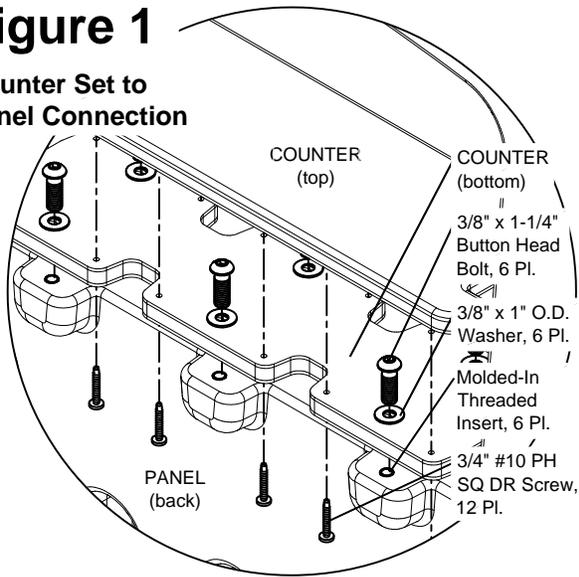


Figure 2

"STORE" Plaque to Panel Connection


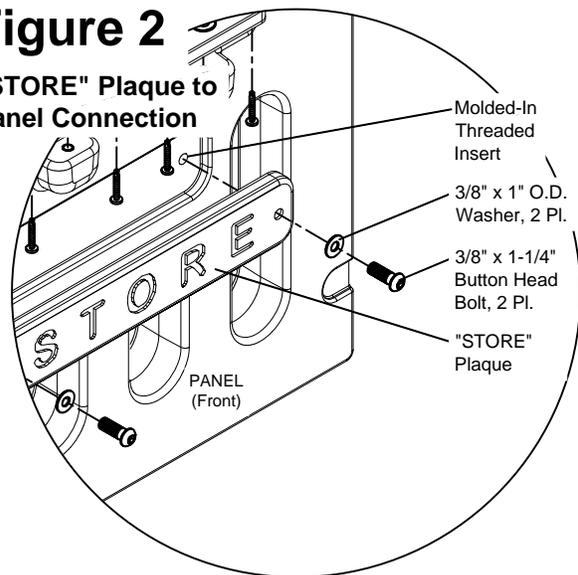


Figure 3

Mounting Lug Connection, 4 Pl.

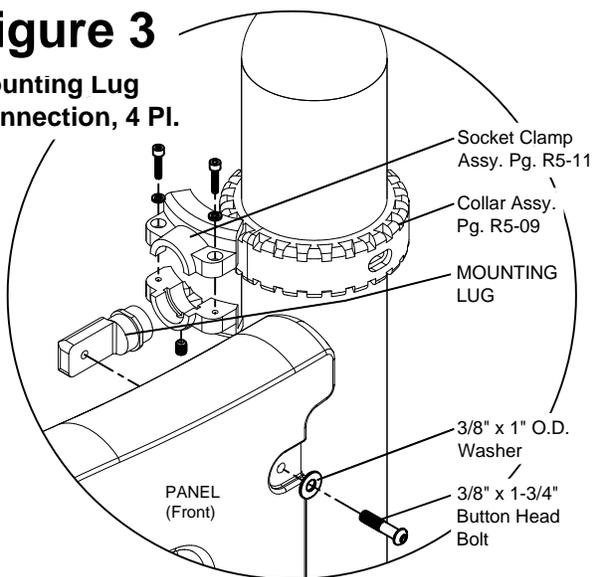

Parts List

<u>PART #</u>	<u>DESCRIPTION</u>	<u>QTY.</u>
004785	Panel Store "Roto" Set (incl. Counter and Plaque)	1 Set
007007	Mounting Lug R5	4
123010	Panel Store Roto R5	1
See Pg. R5-11	Socket Clamp Assy.	4
9103062-TR	Bolt Button Head 3/8" x 1-1/4"	8
9103082-TR	Bolt Button Head 3/8" x 1-3/4"	4
9333002	Washer Flat 3/8" x 1" x .100 thk	12
9251032	Screw SQ #10 x 3/4" DR PH	12

Installation

Step 1.

Locate and mark the position of the Collars on the Support Posts. See Note C. Refer to Assembly Page R5-09 Collars for additional details and hardware.

Step 2.

Attach Counter Set to Panel. Refer to Figure 1 for hardware type and orientation. Attach "STORE" Plaque to front of Panel. Refer to Figure 2 for hardware type and orientation.

Step 3.

Loosely attach the top of the Panel to the Collars using Socket Clamps and Mounting Lugs. Refer to Figure 3 for hardware type and orientation. See also Assembly Page R5-11 Socket Clamps.

Step 4.

Repeat Step 3 to attach bottom of Panel to Collars.

Step 5.

Check distance between top of Panel and bottom of Deck to make sure it doesn't create an Entrapment. See Note C for details.

Step 6.

Apply liquid thread lock and fully tighten all fasteners according to the "TIGHTENING TORQUE FOR HARDWARE" Section of the Installer's Manual. See Note A.

Step 7.

Place appropriate compliant protective surfacing under and around Store Panel Roto. See Note D.

Specifications

STORE PANEL ROTO R5:

Shall be constructed of UV-stabilized, rotationally molded, Linear Low Density Polyethylene with an average single wall thickness of 1/4". The Panel (ROTO) shall be 38" x 43-1/2" x 3" deep.

COUNTER SET & "STORE" PLAQUE:

Shall be fabricated using 3/4" High Density Polyethylene hot-extruded plastic.

SOCKET CLAMPS:

Shall be two-part and precision die-cast from a high strength aluminum alloy. The Socket Clamps have a multi-stage baked-on powder coat finish.

MOUNTING LUGS:

Shall be precision die-cast from a high-strength aluminum alloy. The Mounting Lugs have a multi-stage baked-on powder coating.

HARDWARE:

Shall be stainless steel, zinc/nickel plated or galvanized as required to resist rust and corrosion.

Maintenance

Periodically tighten all screws, bolts and nuts. A periodic inspection of all parts is necessary. If a part is broken or worn, replace immediately. For general maintenance please refer to our Playground Maintenance Manual.

