


IMPORTANT NOTES: Read First

(A) Use liquid thread lock (such as Loctite®) with all threaded hardware. **Important:** Liquid thread lock (prior to curing) helps to eliminate the common problem of "thread seizure" in stainless steel hardware by serving as a lubricant during assembly.

(B) An appropriate energy absorbing safety surface is required under and around all playground equipment. Loose fill protective surfacing is shown only as an example for the purpose of this assembly instruction. Other surfacing material may vary in thickness and/or compression depths. See free publication - The Handbook for Public Playground Safety, Publication #325 at www.cpsc.gov for the surfacing appropriate for the fall height of the equipment or consult your surfacing supply representative.

FIGURE 1
Tri Rope Net Hub

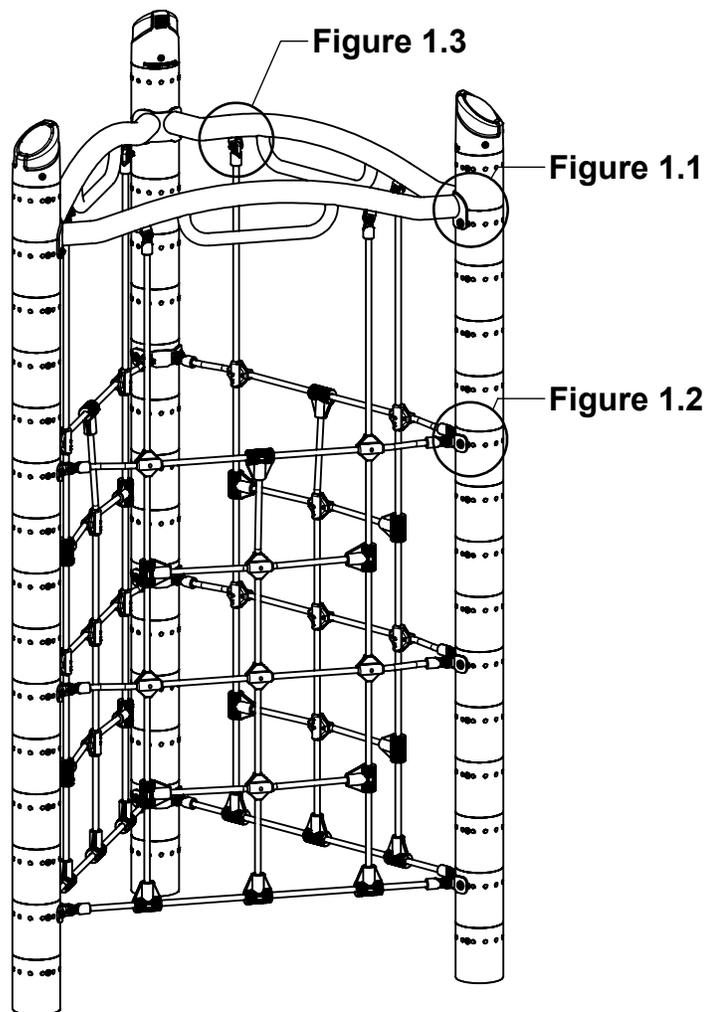

Step 1

Refer to Elevation View, locate mounting holes and remove required Hole Plugs for assembly. Heights shown from finish grade to mounting hole.

Elevation View

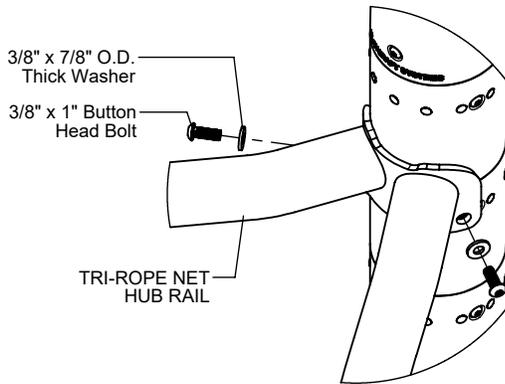
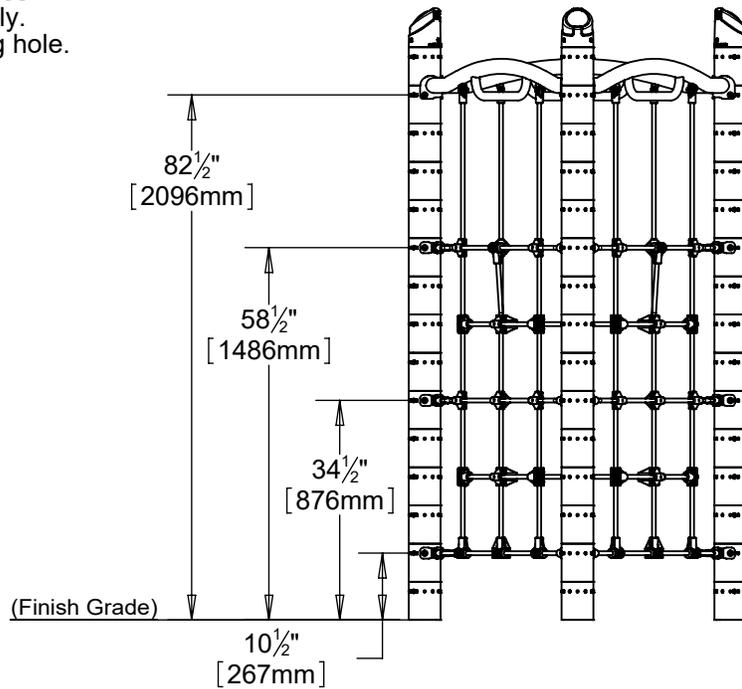


Figure 1.1

Step 2

Locate Tri-Rope Net Hub Rail and attach to Post as shown in Figure 1.1. (See Note A)

NOTE: 3 Places

Step 3

Locate Dual Tab Brackets and attach to Post as shown in Figure 1.2. (See Note A)

NOTE: 9 Places

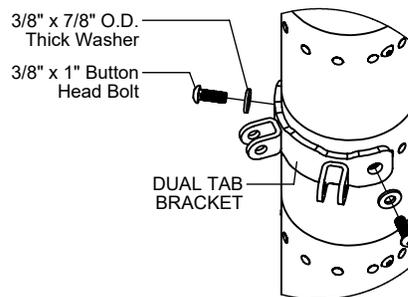


Figure 1.2

Step 4

Attach Rope Net Wall to Anchors as shown in Figure 1.3. (See Note A)

NOTE: 24 Places

Step 5

Fully tighten all fasteners according to the "TIGHTENING TORQUE FOR HARDWARE" section of the Installation Manual.

Step 6

Place required protective surfacing under and around Tri-Rope Net Hub. (See Note B)

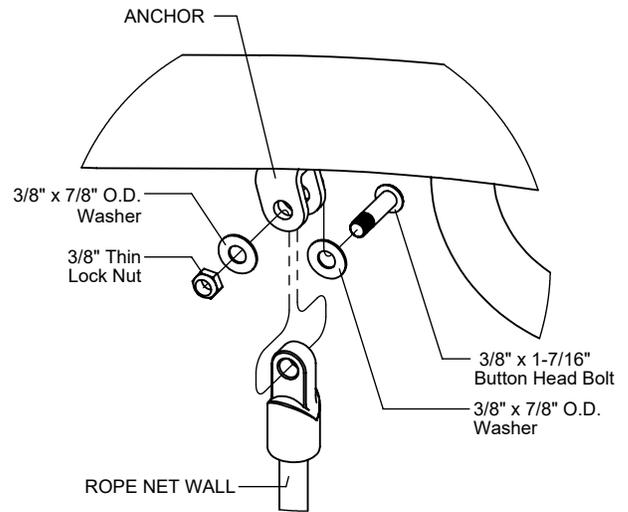


Figure 1.3

Parts List

Part #	DESCRIPTION	QTY
FS-1510-RV-2A	Post Dual Anchor Bracket RV	9
FS-19601-RV	Tri-Rope Net Hub Rail RV	1
HH-0003	Rope Net Wall RV	3
9103052-TR	Bolt Button Head 3/8" x 1"	24
9103200-TR	Bolt Button Head 3/8" x 1-7/16"	24
9333042	Washer Flat 3/8" x 7/8" O.D.	48
9339042	Washer Flat 3/8" x 7/8" O.D. x .100" Thick	24
9423002	Nut Lock Thin 3/8"	24

Specifications

ROPE NET WALL RV:

Shall be made from 16mm steel-reinforced rope with high-strength copolymer plastic intersection connectors and machined aluminum end clevises.

TRI-ROPE NET HUB RAIL RV:

Shall be fabricated using 2.375" O.D. 10 gauge steel tubing with welded 1/4" thick steel mounting brackets, 3/16" thick steel anchors, and 1.315" O.D. 12 gauge steel handles. The Tri-Rope Net Hub RV shall have a multi-stage baked-on powder coat finish.

POST DUAL ANCHOR BRACKET RV:

Shall be fabricated using a 1/4" thick steel mounting bracket with welded 3/16" thick steel anchors. The Post Dual Anchor Bracket RV shall have a multi-stage baked-on powder coat finish.

HARDWARE:

Shall be stainless steel, zinc/nickel plated or galvanized as required to resist rust and corrosion.

Maintenance

Periodically tighten all screws, bolts and nuts. A periodic inspection of all parts is necessary. If a part is broken or worn, replace immediately. For general maintenance please refer to our Playground Maintenance Manual.