


IMPORTANT NOTES: Read First

- (A) Use liquid thread lock (such as Loctite®) with all threaded hardware. **Important:** Liquid thread lock (prior to curing) helps to eliminate the common problem of "thread seizure" in stainless steel hardware by serving as a lubricant during assembly.
- (B) All gaps created between Net Tower Components and structural components must be less than 3-1/2" [89mm] or greater than 9" [229mm].
- (C) Refer to the Site Plan included with the Installation Guidelines for additional Footing Layout dimensions and orientation. Actual mounting locations may vary according to system design.
- (D) An appropriate energy absorbing safety surface is required under and around all playground equipment. Loose fill protective surfacing is shown only as an example for the purpose of this assembly instruction. Other surfacing material may vary in thickness and/or compression depths. See free publication - The Handbook for Public Playground Safety, Publication #325 at www.cpsc.gov for the surfacing appropriate for the fall height of the equipment or consult your surfacing supply representative.

FIGURE 1
Net Tower Ladder

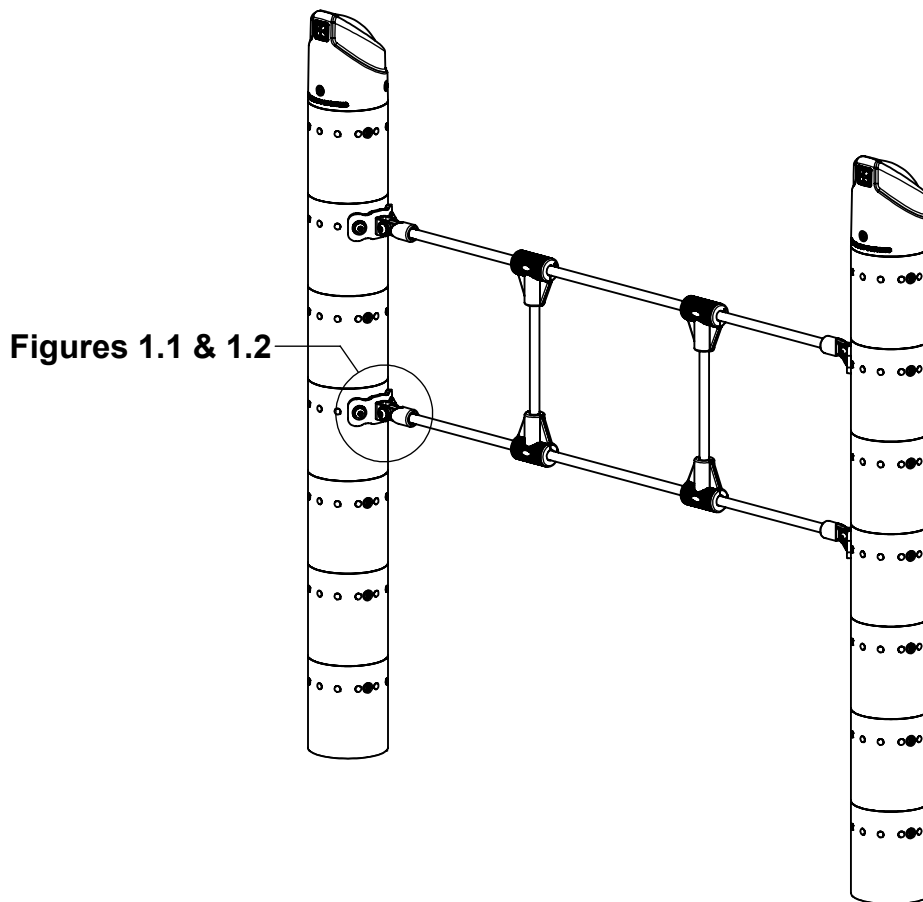

Step 1

Refer to Site Plan for alignment and orientation.
Locate mounting holes and remove required Hole
Plugs for assembly.

*Height shown from mounting hole to mounting hole.

Elevation View

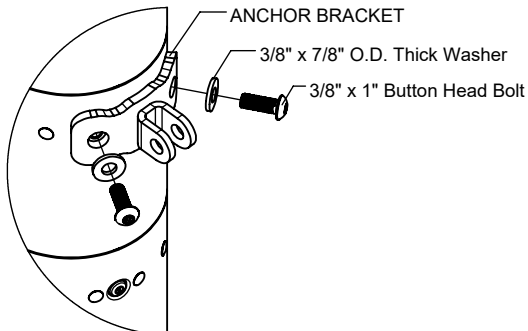
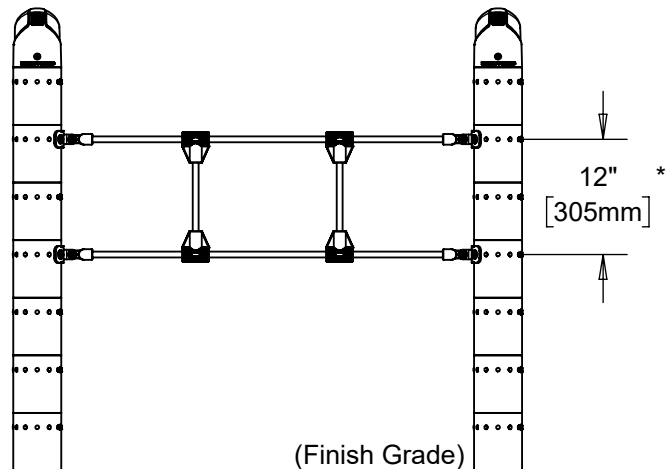


Figure 1.1

Step 3

Attach Net Tower Ladder to Post Anchor
Brackets as shown in Figure 1.2. (See Note A)

NOTE: 4 Places

Step 2

Attach Post Anchor Brackets to posts as shown
in Figure 1.1. (See Notes A & C)

NOTE: 4 Places

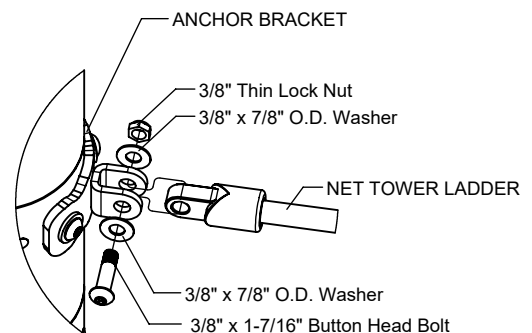


Figure 1.2

NET TOWER LADDER RV INSTALLATION INSTRUCTIONS

RV-1293
Page 3 of 3

Parts List

Part #	DESCRIPTION	QTY.
FS-1510-RV-A	Post Anchor Bracket RV	4
HH-0018	Net Tower Ladder RV	1
9103052-TR	Bolt Button Head 3/8" x 1"	8
9103200-TR	Bolt Button Head 3/8" x 1-7/16"	4
9333042	Washer Flat 3/8" x 7/8" O.D.	8
9339042	Washer Flat 3/8" x 7/8" O.D. x .100" Thick	8
9423002	Nut Lock Thin 3/8"	4

Specifications

POST ANCHOR BRACKET RV:

Shall be fabricated using a 1/4" thick stainless steel mounting bracket with welded 3/16" thick stainless steel anchor. The Post Anchor Bracket RV shall have a multi-stage baked-on powder coat finish.

NET TOWER LADDER RV:

Shall be made from 16mm steel-reinforced rope with high-strength copolymer plastic intersection connectors and machined aluminum end clevises.

HARDWARE:

Shall be stainless steel, zinc/nickel plated or galvanized as required to resist rust and corrosion.

Maintenance

Periodically tighten all screws, bolts and nuts. A periodic inspection of all parts is necessary. If a part is broken or worn, replace immediately. For general maintenance please refer to our Playground Maintenance Manual.



www.playcraftsystems.com
For Customer Service Call
800.333.8519 (U.S.A.) or 541.955.9199 (International)

Rev C
8/12/2019