


Assembly View

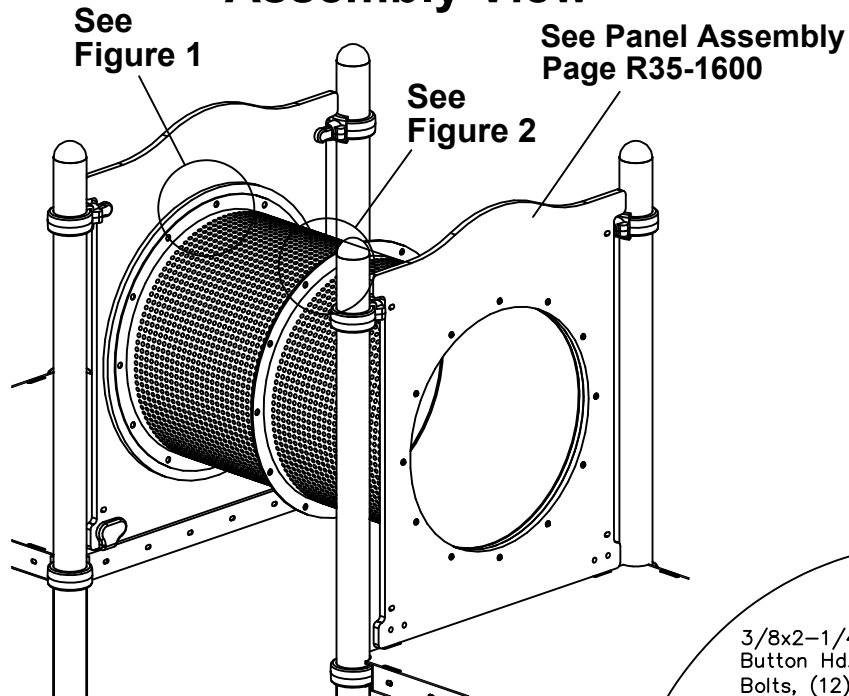

Plan View

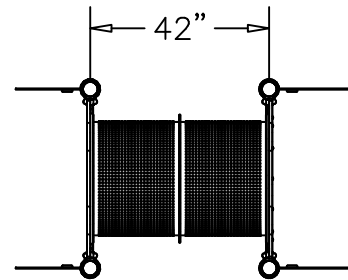


Figure 1


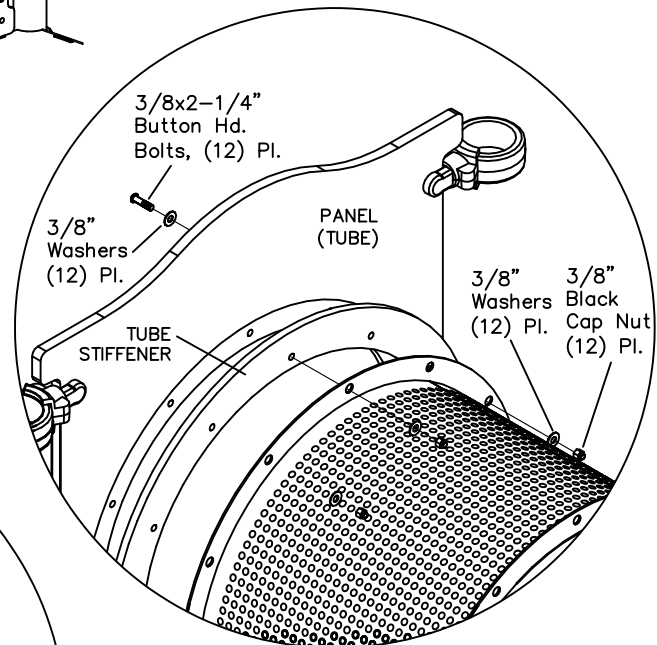


Figure 2

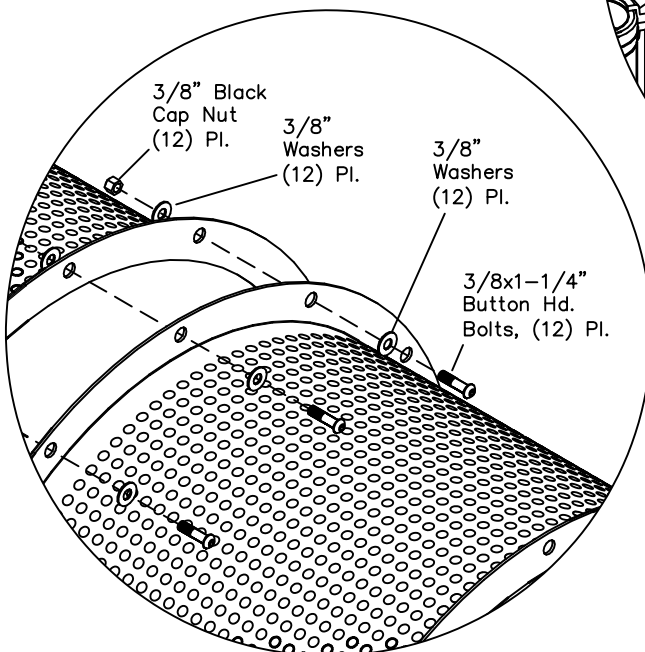

Parts List

<u>QTY.</u>	<u>DESCRIPTION</u>	<u>PART #</u>
2	Steel Crawl Tube Half	8219
2	Round Panel (Tube)	R35-1600
2	Tube Stiffener Sets	4665
24	3/8 x 2-1/4" Button Hd. Bolts	9103092-TR
12	3/8 x 1-1/4" Button Hd. Bolts	9103062-TR
72	3/8" Washers	9333002
36	3/8" Black Cap Nuts	9463160-BLK

Specifications

CRAWL TUBE:

Shall be formed, vinyl coated, 12 gauge steel.

PANELS:

Shall be 3/4" thick, high-density, plastic laminate.

HARDWARE:

Shall be zinc/nickel plated, galvanized or stainless steel as required to resist rust and corrosion.

Installation

Notes:

A) Use liquid thread lock (such as Loctite) with all threaded hardware that does not include self locking nuts.

B) Refer to R3.5-1600 Panel assembly page for instructions.

Step 1.

Attach Panels and Panel Stiffeners to the Steel Crawl Tube halves using the hardware as shown in Figure 1.

Step 2.

Place the Panel-Tube Assembly on the decks with Panels resting on top of Decks. Attach panels to Posts and Deck as shown on assembly page R35-1600.

Step 3.

Attach Steel Tube halves together using hardware as shown in Figure 2.

Step 4.

Snug tighten all fasteners.

Step 5.

Check to ensure proper placement of the activity and make adjustments if necessary.

Step 6.

Fully tighten all fasteners.

Maintenance

Periodically tighten all screws, bolts and nuts.
A periodic inspection of all parts is necessary.
If a part is broken or worn, replace immediately.