


IMPORTANT NOTES: Read First

(A) Use liquid thread lock (such as Loctite®) with all threaded hardware. **Important:** Liquid thread lock (prior to curing) helps to eliminate the common problem of "thread seizure" in stainless steel hardware by serving as a lubricant during assembly.

FIGURE 1
R5 Shingled Pyramid
Roof Flag

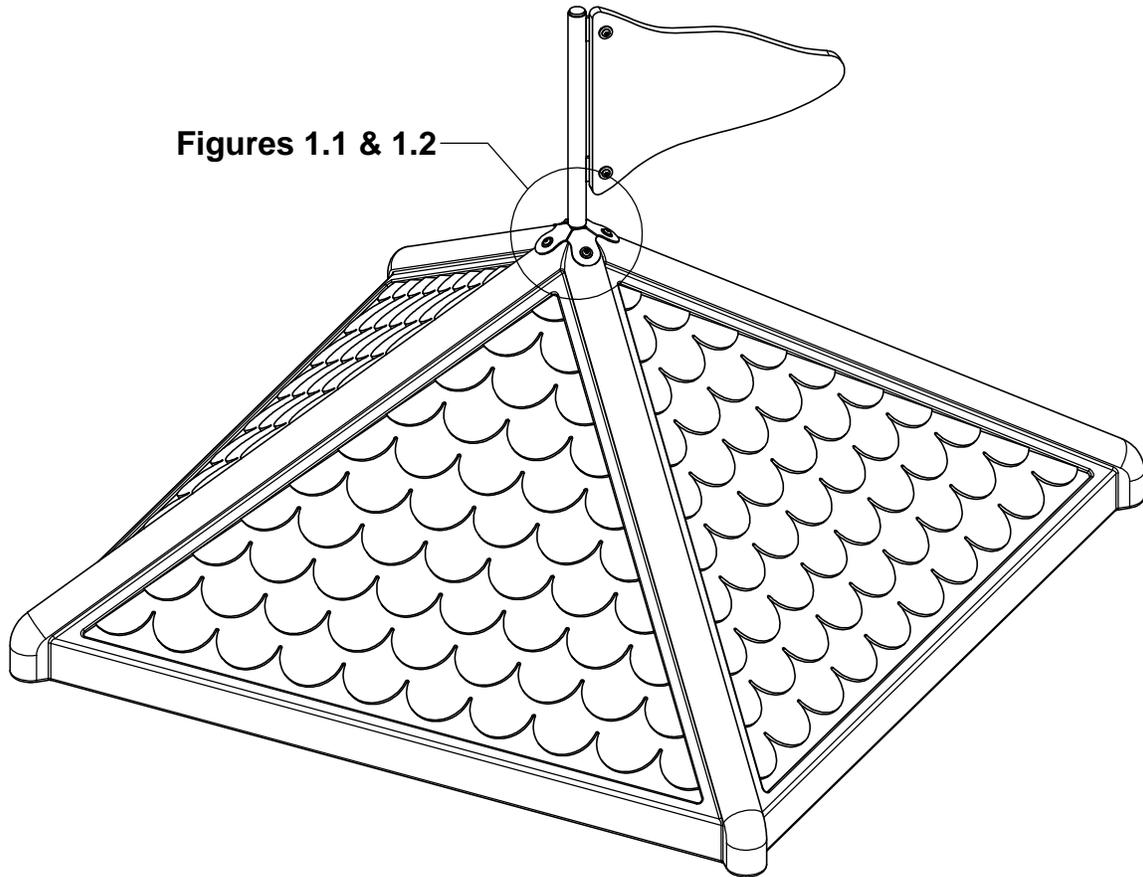

Step 1 (Factory Assembled)

Using Flag Post, match drill (4) 3/4" holes, and attach Strap Toggles as shown in Figure 1.1.

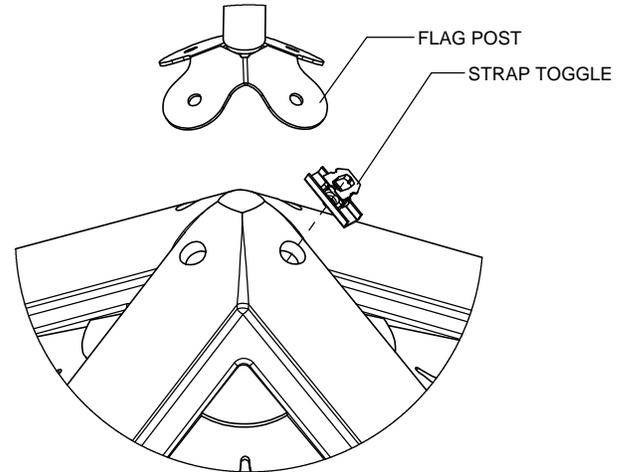


Figure 1.1

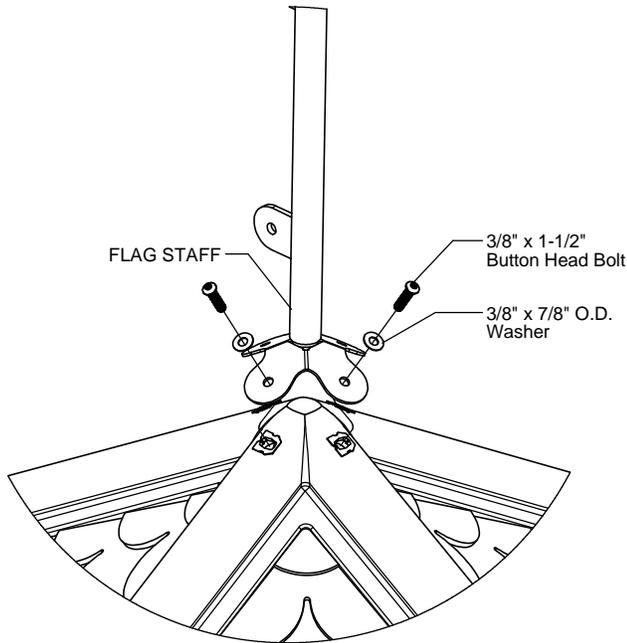


Figure 1.2

Step 2

Attach Flag Post to Shingled Pyramid Roof as shown in Figure 1.2. (See note A)

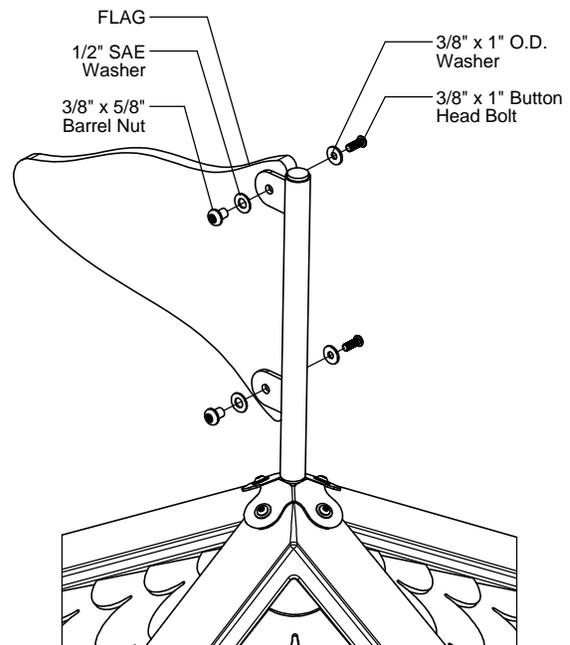


FIGURE 2

Step 3

Attach Flag to Flag Post as shown in Figure 2. (See Note A)

Step 4

Fully tighten all fasteners according to the "TIGHTENING TORQUE FOR HARDWARE" section of the Installation Manual.

Parts List

Part #	DESCRIPTION	QTY.
EE-4655	Roof Flag	1
FS-1825	Shingled Roof Flagpole	1
9103052-TR	Bolt Button Head 3/8" x 1"	2
9103072-TR	Bolt Button Head 3/8" x 1-1/2"	4
9333002	Washer Flat 3/8" x 1" O.D. x .100" thick	2
9333042	Washer Flat 3/8" x 7/8" O.D.	4
9345002	Washer Flat SAE 1/2"	2
9443022-TR	Nut Barrel 3/8" x 5/8" BH	2

Assembled Parts list

Part #	DESCRIPTION	QTY.
9643160	Strap Toggle 3/8"-16	4

Specifications

ROOF FLAG:

Shall be made from high density 3/4" sheet plastic specially formulated for optimum UV stability and color retention.

FLAG POST:

Shall be fabricated from 1.315" O.D. 12 gauge steel tubing with welded 1/4" thick steel tabs and welded to 12 gauge sheet steel. Shingled Square Roof Flag will have a multi-stage baked-on powder coat finish.

HARDWARE:

Shall be stainless steel, zinc/nickel plated or galvanized as required to resist rust and corrosion.

Maintenance

Periodically tighten all screws, bolts and nuts. A periodic inspection of all parts is necessary. If a part is broken or worn, replace immediately. For general maintenance please refer to our Playground Maintenance Manual.

