


IMPORTANT NOTES: Read First

(A) Use liquid thread lock (such as Loctite®) with all threaded hardware. **Important:** Liquid thread lock (prior to curing) helps to eliminate the common problem of "thread seizure" in stainless steel hardware by serving as a lubricant during assembly.

FIGURE 1
Seek Plaque

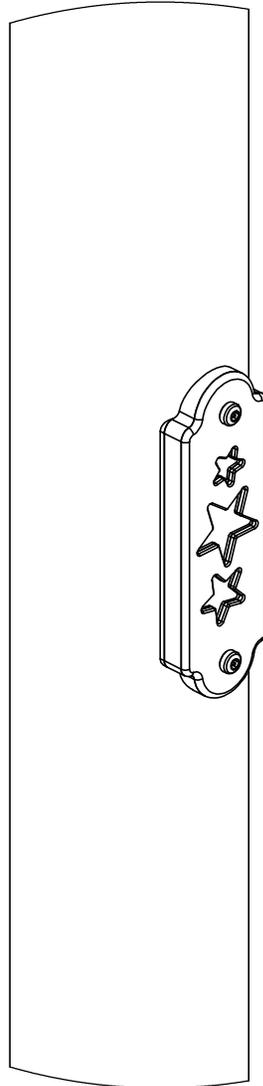

NOTE: R5 Seek Plaque shown.

Step 1a

For R3.5 and R5 Only

Locate desired post to mount Plaque and attach as shown in Figure 2.

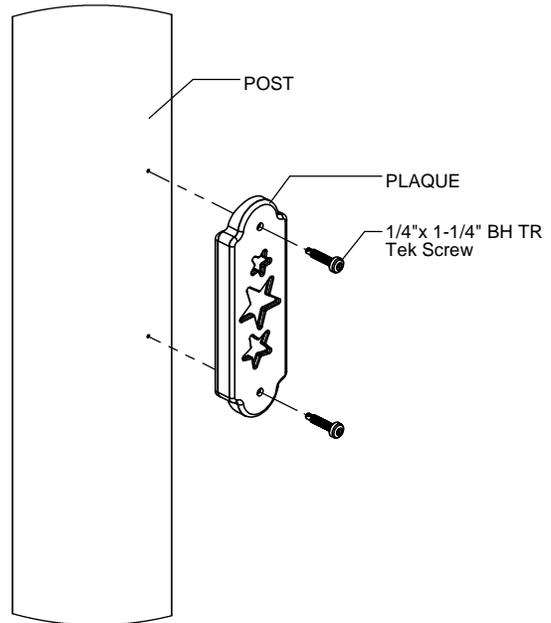


FIGURE 2

Step 1b

For Revolution Only

Locate desired post to mount Plaque and attach as shown in Figure 3.

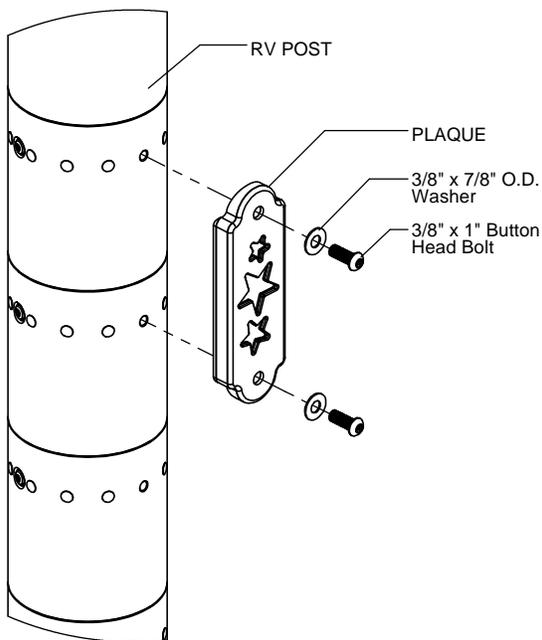


FIGURE 3

SEEK PLAQUE ASSEMBLY INSTALLATION INSTRUCTIONS

1618
Page 3 of 3

R3.5 and R5 Parts List

Part #	DESCRIPTION	QTY.
Varies	Seek Plaque	7
9271062-TR	Screw Tek 1/4" x 1-1/4" BH TR	14

Revolution Parts List

Part #	DESCRIPTION	QTY.
Varies	Seek Plaque	7
9103052-TR	Bolt Button Head 3/8" x 1"	14
9333042	Washer Flat 3/8" x 7/8" O.D.	14

Specifications

SEEK PANEL PLAQUE:

Shall be made from high-density 3/4" thick hot extruded polyethylene sheet plastic specially formulated for optimum UV stability and color retention.

HARDWARE:

Shall be stainless steel, zinc/nickel plated or galvanized as required to resist rust and corrosion.

Maintenance

Periodically tighten all screws, bolts and nuts. A periodic inspection of all parts is necessary. If a part is broken or worn, replace immediately. For general maintenance please refer to our Playground Maintenance Manual.



Manufactured by Krauss Craft, Inc.
www.playcraftsystems.com

For Customer Service Call
800.333.8519 (U.S.A.) or
541.955.9199 (International)

Rev C
8/3/2015