


IMPORTANT NOTES: Read First

(A) Use liquid thread lock (such as Loctite®) with all threaded hardware. **Important:** Liquid thread lock (prior to curing) helps to eliminate the common problem of "thread seizure" in stainless steel hardware by serving as a lubricant during assembly.

(B) Refer to Installation Manual for 09 Collars installation instructions.

FIGURE 1
Composer
Instrument Panel

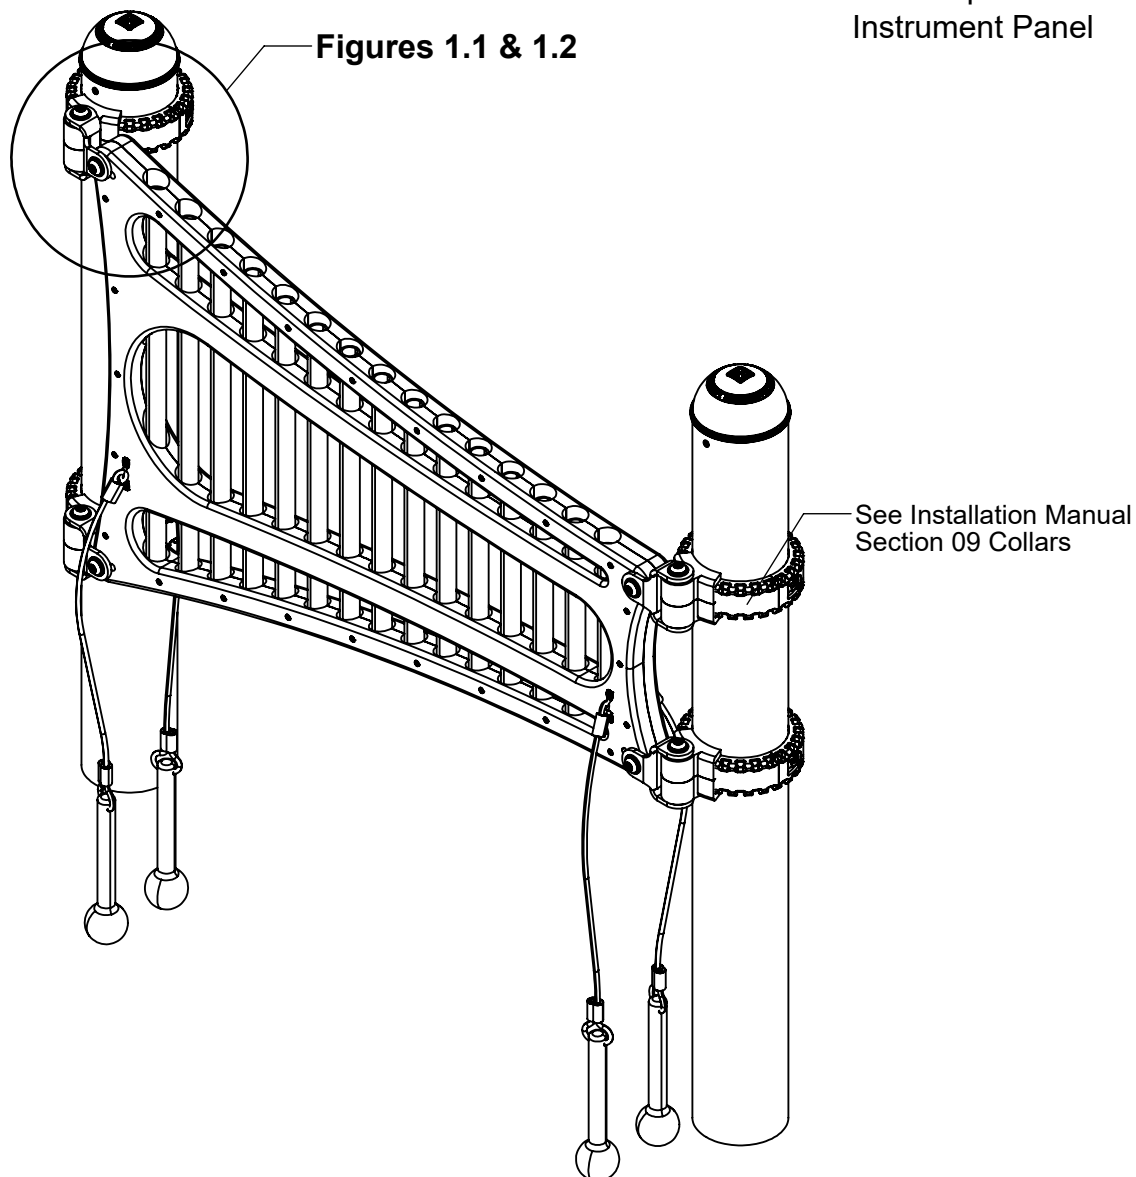


NOTE: R5 Composer Instrument Panel shown. Other configurations will vary slightly, but does not affect assembly.

Step 1

Locate and attach collars at heights shown in Elevation View. (See Note B)

* Height shown from top of collar to top of collar.

** Height shown from finish grade to top of collar.

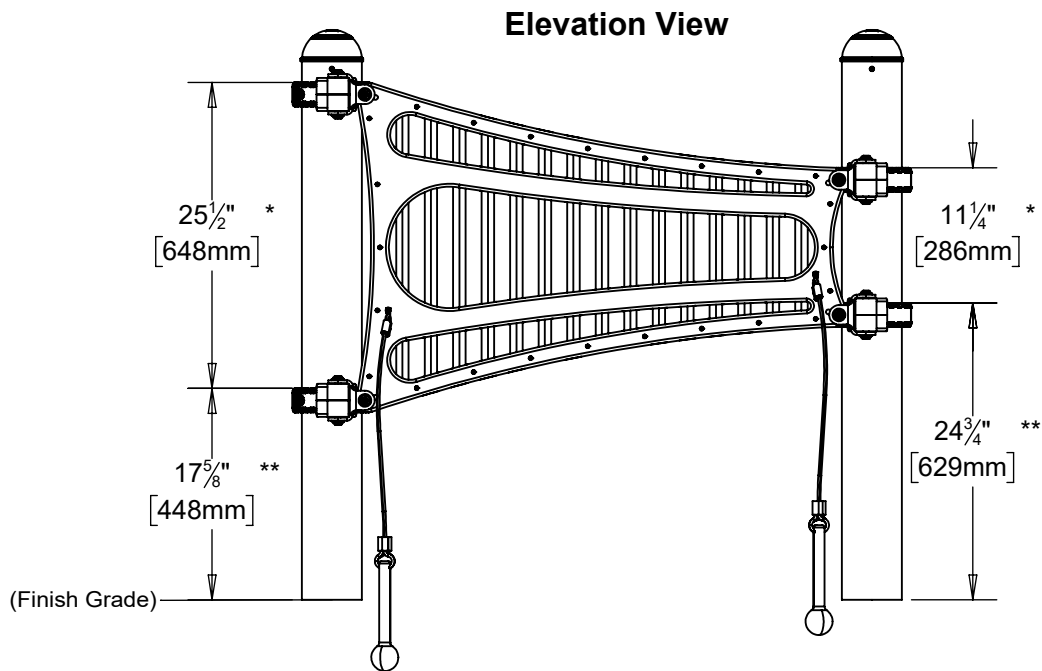

Step 2

Attach Double Sit Down Brackets to Composer as shown in Figure 1.1. Note orientation of Brackets in R5 versus R35. (See Note A)

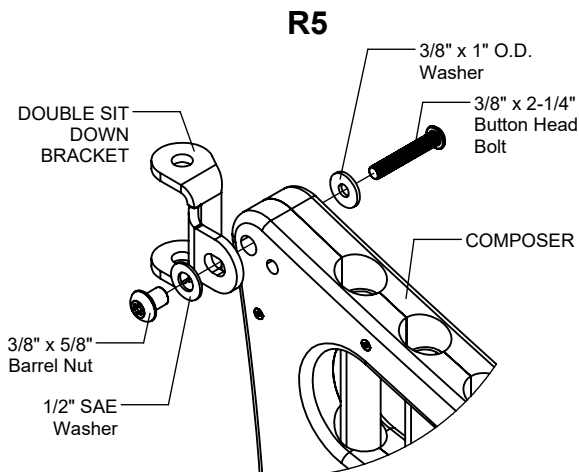


Figure 1.1a

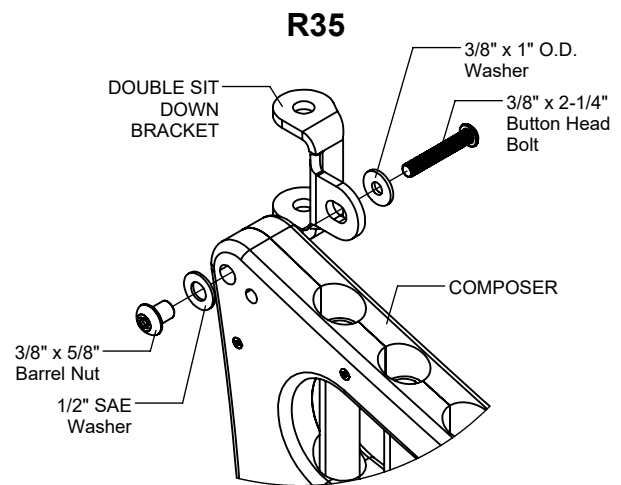


Figure 1.1b

Step 3

Attach Composer to Collar as shown in Figure 1.1.
Note orientation of Composer in R5 versus R35.
(See Note A).

Step 4

Fully tighten all fasteners according to the
"TIGHTENING TORQUE FOR HARDWARE"
section of the Installation Manual.

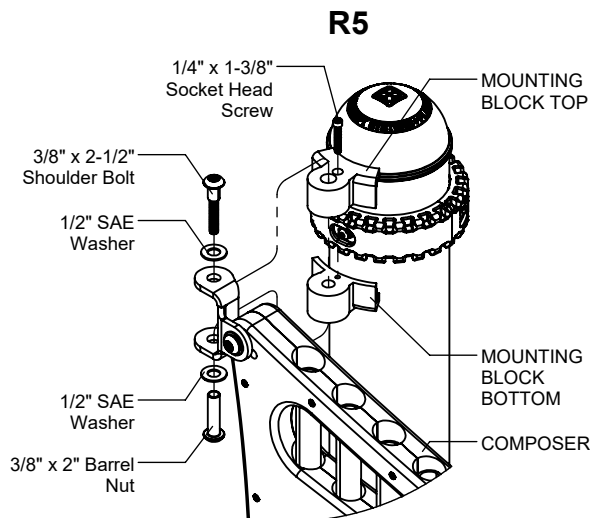


Figure 1.2a



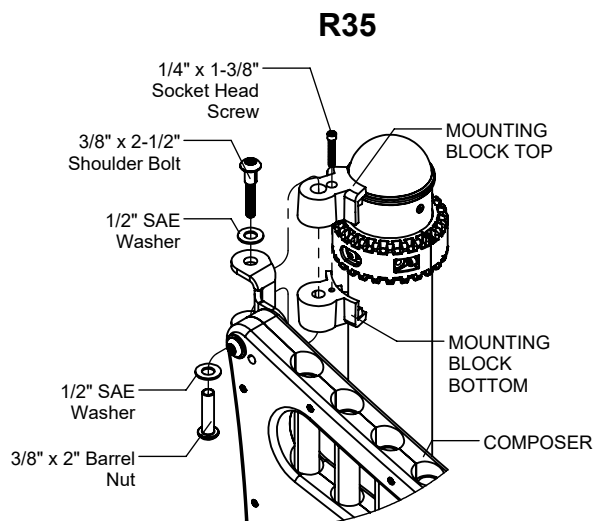


Figure 1.2b

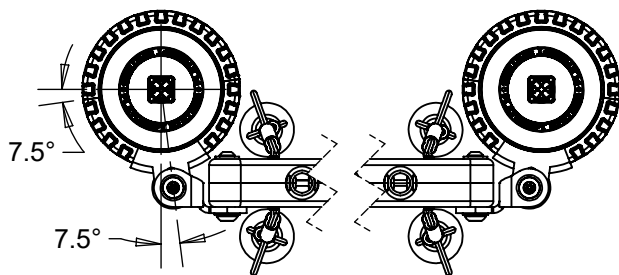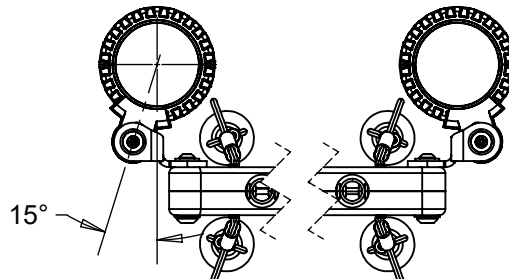

COMPOSER INSTRUMENT PANEL INSTALLATION INSTRUCTIONS

16520
Page 4 of 4

Parts List

R5		
Part #	DESCRIPTION	QTY
BG-8157	Sit Down Bracket Double R3.5	4
FHP-COMP-48	Composer	1
GF-7006-B	Mounting Block R5 Bottom	4
GF-7006-T	Mounting Block R5 Top	4
9103102-TR	Bolt Button Head 3/8" x 2-1/4"	4
9143112-TR	Bolt Shoulder 3/8" x 2-1/2" BH	4
9281062-5-TR	Screw Soc HD 1/4" x 1-3/8"	4
9333002	Washer Flat 3/8" x 1" O.D. x .100" thick	4
9345002	Washer Flat SAE 1/2"	12
9443022-TR	Nut Barrel 3/8" x 5/8" BH	4
9443092-TR	Nut Barrel 3/8" x 2" BH	4

R35		
Part #	DESCRIPTION	QTY
BG-8157	Sit Down Bracket Double R3.5	4
FHP-COMP-48	Composer	1
GG-8110	Mounting Block 4 Top R3.5	4
GG-8111	Mounting Block 4 Bottom R3.5	4
9103102-TR	Bolt Button Head 3/8" x 2-1/4"	4
9143112-TR	Bolt Shoulder 3/8" x 2-1/2" BH	4
9281062-5-TR	Screw Soc HD 1/4" x 1-3/8"	4
9333002	Washer Flat 3/8" x 1" O.D. x .100" thick	4
9345002	Washer Flat SAE 1/2"	12
9443022-TR	Nut Barrel 3/8" x 5/8" BH	4
9443092-TR	Nut Barrel 3/8" x 2" BH	4

Specifications

SIT DOWN BRACKET DOUBLE R3.5:

Shall be precision cut and formed from 1/4" thick sheet steel and will have a multi-stage baked-on powder coat finish.

COMPOSER:

Shall be an assembly consisting of a plastic framework, metal tubing, and molded mallets. Contact Freenotes Harmony Park for complete technical specifications.

MOUNTING BLOCKS:

Shall be two-part and precision die-cast from a high strength aluminum alloy and will have a multi-stage baked-on powder coat finish.

HARDWARE:

Shall be stainless steel, zinc/nickel plated or galvanized as required to resist rust and corrosion.

Maintenance

Periodically tighten all screws, bolts and nuts. A periodic inspection of all parts is necessary. If a part is broken or worn, replace immediately. For general maintenance please refer to our Playground Maintenance Manual.



www.playcraftsystems.com
For Customer Service Call
800.333.8519 (U.S.A.) or 541.955.9199 (International)

Rev A
7/23/2021