


IMPORTANT NOTES: Read First

(A) Use liquid thread lock (such as Loctite®) with all threaded hardware. **Important:** Liquid thread lock (prior to curing) helps to eliminate the common problem of "thread seizure" in stainless steel hardware by serving as a lubricant during assembly.

(B) Location of X2 Panels is identical for front and rear of tower.

(C) Refer to Installation Manual for A2-NE-X2 Tower, 1602-BBL Bubble Panel, and 1632 Bugeye Panel installation instructions.

FIGURE 1
X2 View Panels

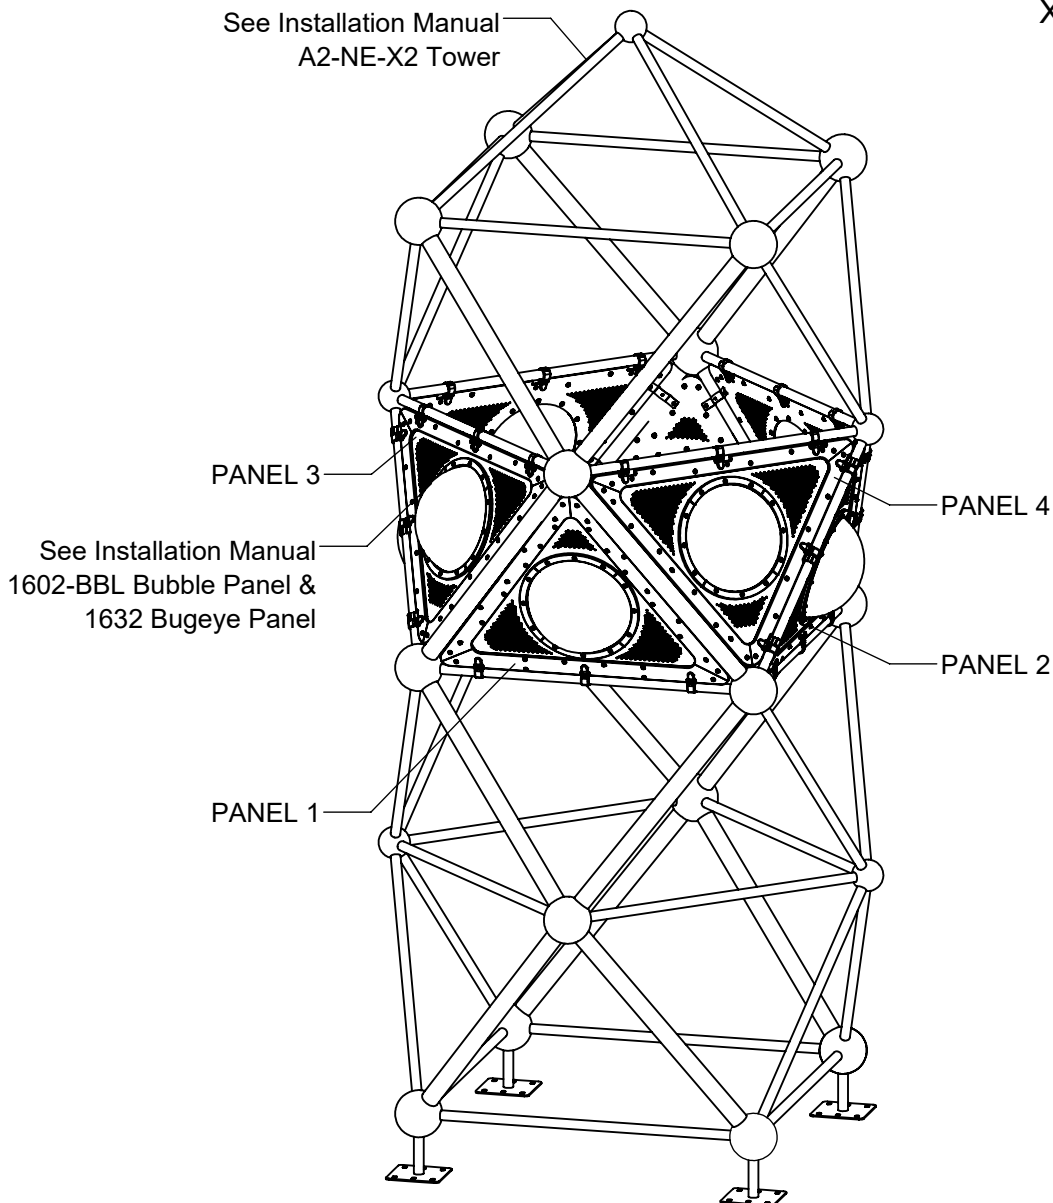

NOTE: X2 Panels with Bubble insert shown. Other configurations will vary slightly, but does not affect assembly.

VIEW PANEL 1

Step 1 (Factory Assembled)

Attach Panel 1 Trim to Panel 1 as shown in Figure 2.
(See Note A)

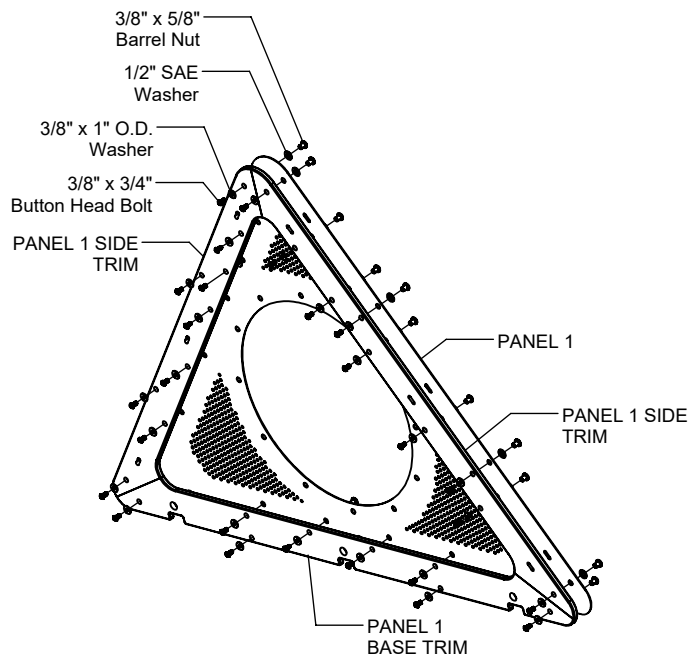


FIGURE 2

VIEW PANEL 2

Step 2 (Factory Assembled)

Attach Panel 2 Trim to Panel 2 as shown in Figure 3.
(See Note A)

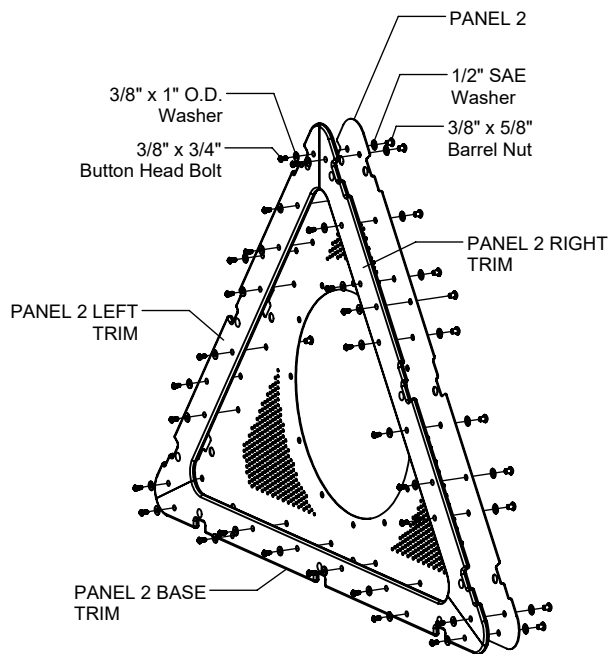


FIGURE 3

VIEW PANEL 3

Step 3 (Factory Assembled)

Attach Panel 3 Trim to Panel 3 as shown in Figure 4.
 (See Note A)

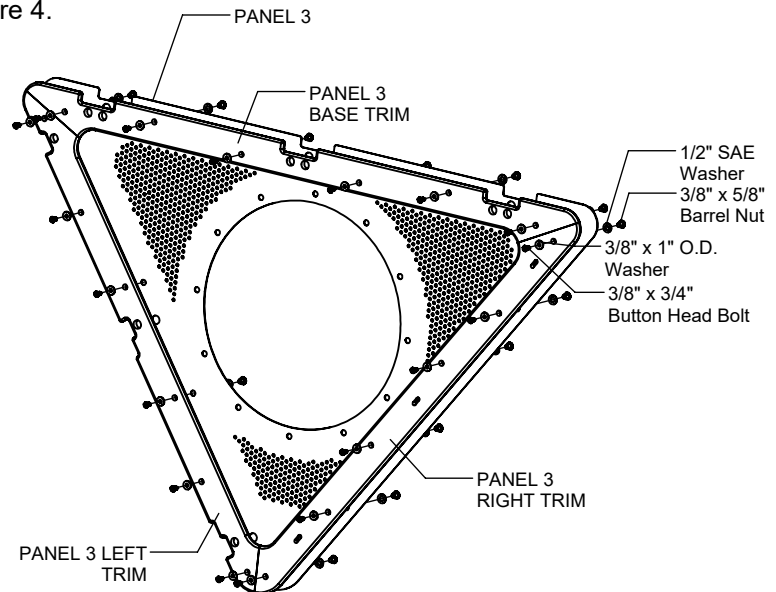


FIGURE 4

VIEW PANEL 4

Step 4 (Factory Assembled)

Attach Panel 3 Trim to Panel 4 as shown in Figure 5.
 (See Note A)

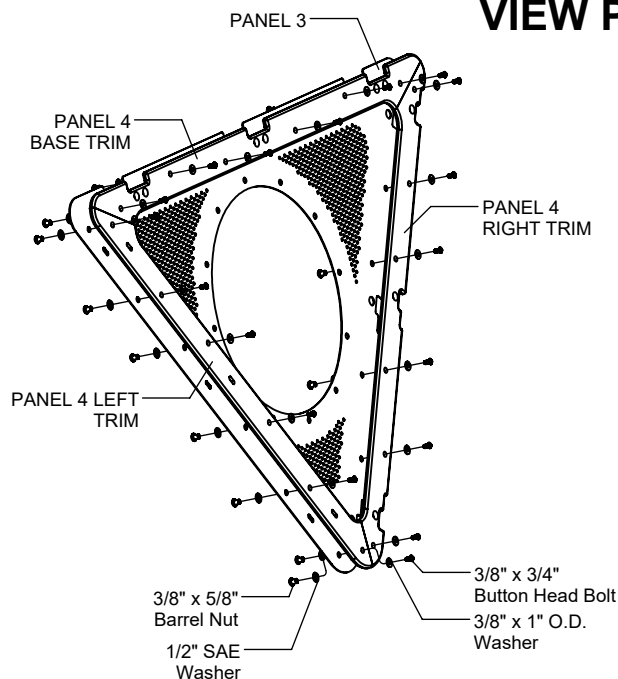


FIGURE 5

Step 5

Assemble Round Panel Inserts (Bubble, Bug Eye, etc.) to each X2 Panel. (See Note C)

Step 6

Attach Pipe Clamps to Tower as shown in Figure 6. (See Note C)

NOTE: 0, 3, or 6 Pipe Clamps required per panel.

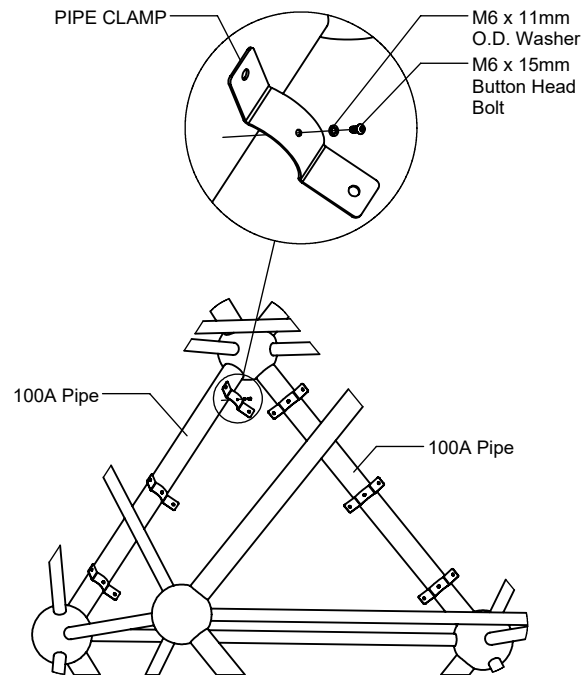


FIGURE 6

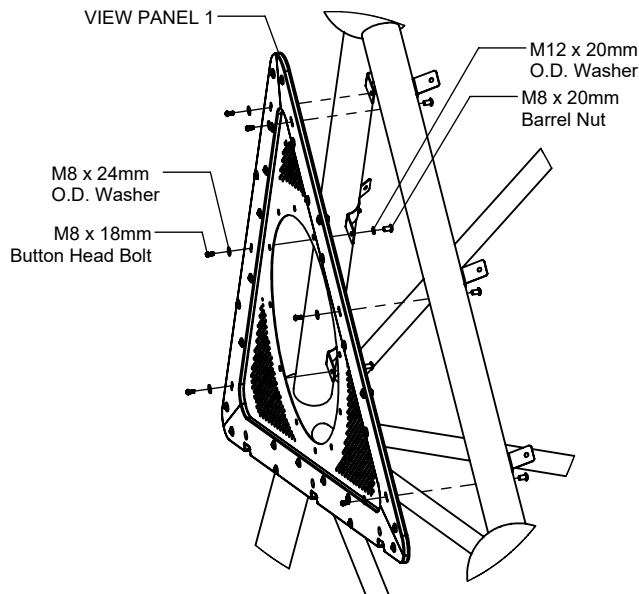


FIGURE 7


Step 7

For View Panels 1, 2, & 4 Only

Attach View Panels to Pipe Clamps as shown in Figure 7. (See Notes A & C)

Step 8

Attach View Panels to 50A Pipes with Panel Clamps as shown in Figure 8. (See Note C)

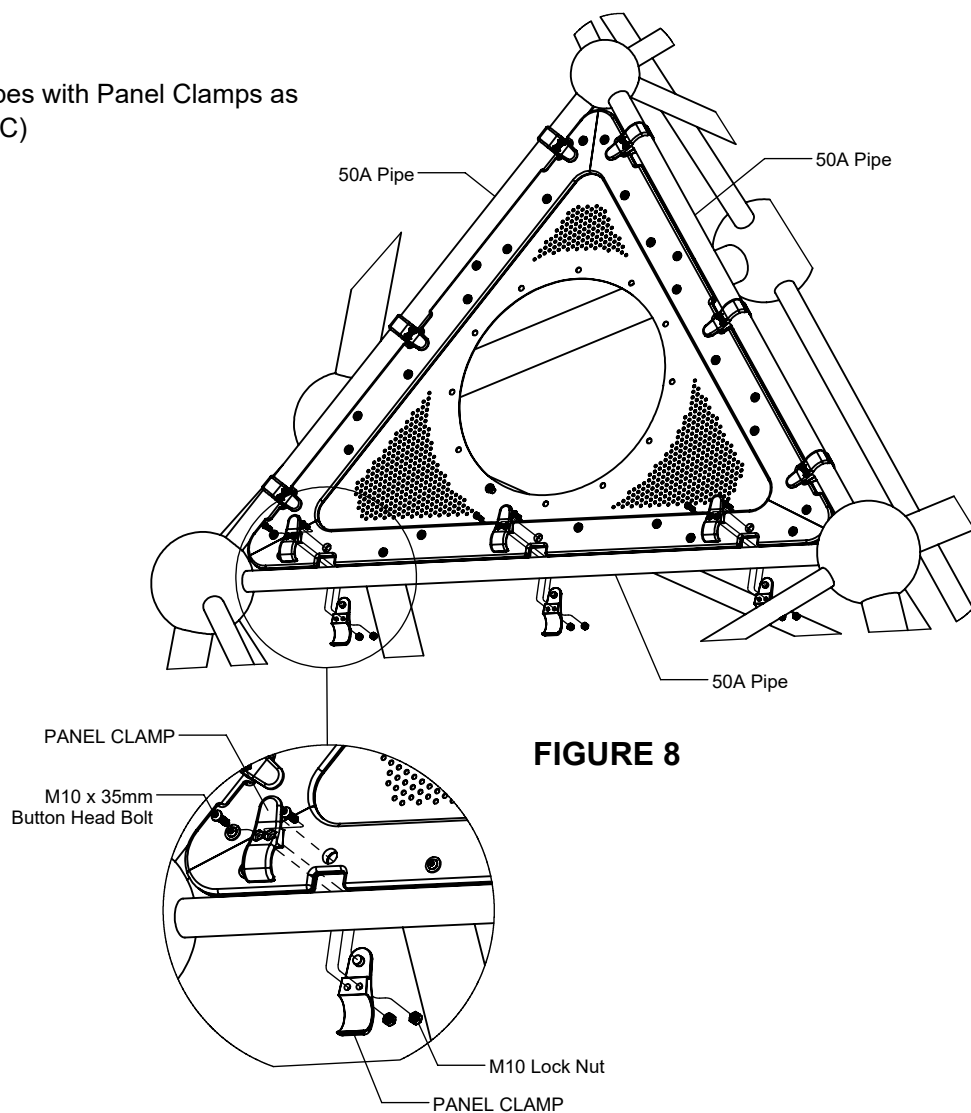

X2 VIEW PANELS

INSTALLATION INSTRUCTIONS

13601-X2
Page 6 of 6

Parts List

Part #	DESCRIPTION	QTY
Varies	Round Panel Insert	1

Assembled Parts List

PANEL 1		
Part #	DESCRIPTION	QTY
AE-1212	X2 Tower BBS Plate (Panel 1)	1
EE-0673-B	X2 BBS Base HDPE (Panel 1)	1
EE-0673-S	X2 BBS Side HDPE (Panel 1)	1
EE-0673-S	X2 BBS Side HDPE (Panel 1)	1
9103032-TR	Bolt Button Head 3/8" x 3/4"	26
9333002	Washer Flat 3/8" x 1" O.D. x .100" thick	26
9345002	Washer Flat SAE 1/2"	26
9443022-TR	Nut Barrel 3/8" x 5/8" BH	26

PANEL 2		
Part #	DESCRIPTION	QTY
AE-1213	X2 Tower SSS Plate (Panel 2)	1
EE-0693-B	X2 SSS Base HDPE (Panel 2)	1
EE-0693-L	X2 SSS Left HDPE (Panel 2)	1
EE-0693-R	X2 SSS Right HDPE (Panel 2)	1
9103032-TR	Bolt Button Head 3/8" x 3/4"	26
9333002	Washer Flat 3/8" x 1" O.D. x .100" thick	26
9345002	Washer Flat SAE 1/2"	26
9443022-TR	Nut Barrel 3/8" x 5/8" BH	26

PANEL 3		
Part #	DESCRIPTION	QTY
AE-1214	X2 Tower BSS Plate (Panel 3)	1
EE-0694-B	X2 BSS Base HDPE (Panel 3)	1
EE-0694-L	X2 BSS Left HDPE (Panel 3)	1
EE-0694-R	X2 BSS Right HDPE (Panel 3)	1
9103032-TR	Bolt Button Head 3/8" x 3/4"	18
9333002	Washer Flat 3/8" x 1" O.D. x .100" thick	18
9345002	Washer Flat SAE 1/2"	18
9443022-TR	Nut Barrel 3/8" x 5/8" BH	18

PANEL 4		
Part #	DESCRIPTION	QTY
AE-1214	X2 Tower BSS Plate (Panel 3)	1
EE-0695-B	X2 SBS Base HDPE (Panel 4)	1
EE-0695-L	X2 SBS Left HDPE (Panel 4)	1
EE-0695-R	X2 SBS Right HDPE (Panel 4)	1
9103032-TR	Bolt Button Head 3/8" x 3/4"	18
9333002	Washer Flat 3/8" x 1" O.D. x .100" thick	18
9345002	Washer Flat SAE 1/2"	18
9443022-TR	Nut Barrel 3/8" x 5/8" BH	18

Specifications

MAIN PANELS:

Shall be fabricated using punched 12 gauge sheet steel and will have a multi-stage baked-on powder coat finish.

PANEL TRIM:

Shall be made from high density 3/4" sheet plastic specially formulated for optimum UV stability and color retention.

HARDWARE:

Shall be stainless steel, zinc/nickel plated or galvanized as required to resist rust and corrosion.

Maintenance

Periodically tighten all screws, bolts and nuts. A periodic inspection of all parts is necessary. If a part is broken or worn, replace immediately. For general maintenance please refer to our Playground Maintenance Manual.



www.playcraftsystems.com
For Customer Service Call
800.333.8519 (U.S.A.) or 541.955.9199 (International)

Rev D
2/6/2024