


IMPORTANT NOTES: Read First

(A) Use liquid thread lock (such as Loctite®) with all threaded hardware. **Important:** Liquid thread lock (prior to curing) helps to eliminate the common problem of "thread seizure" in stainless steel hardware by serving as a lubricant during assembly.

B) Refer to Installation Manual for 09 Collars and 11 Socket Clamps assembly instructions.

FIGURE 1
Flag on Post Assembly

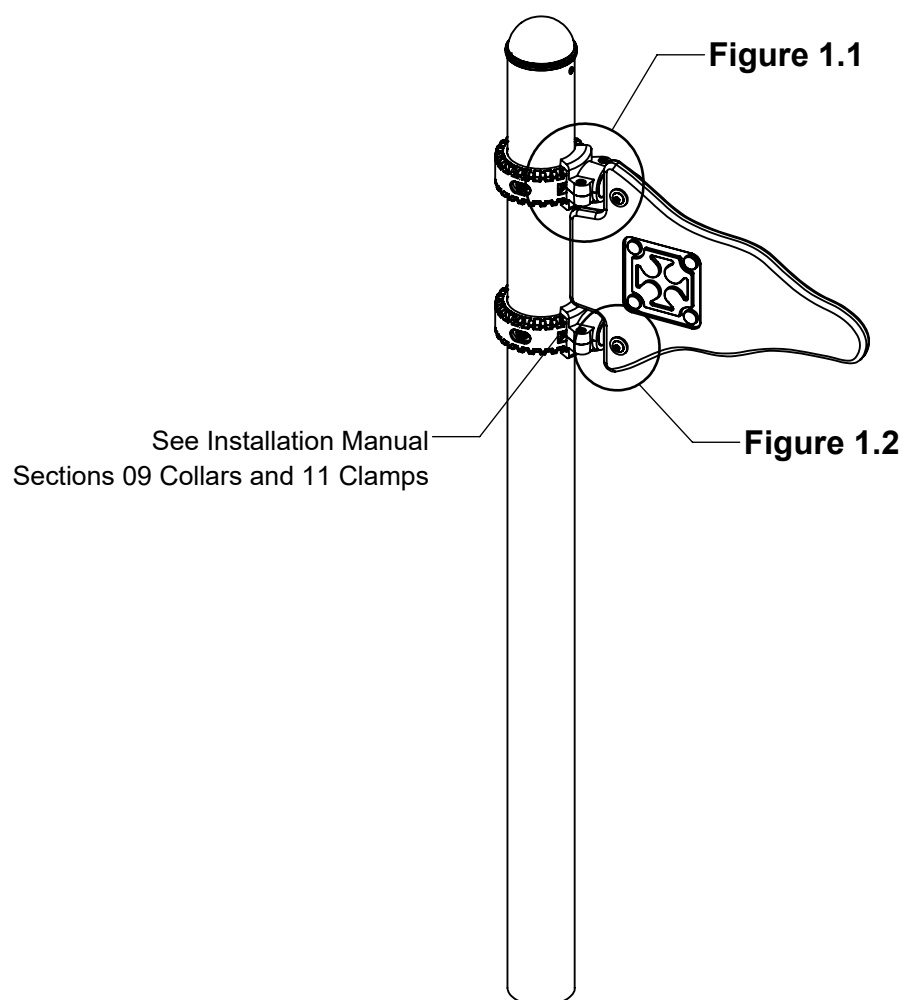

NOTE: R3.5 Triangle Flag shown. Other configurations will vary slightly, but does not affect assembly.

Step 1

Locate and attach collars at heights shown in Elevation View. (See Note B)

* Height shown from top of post to top of collar.

** Height shown from top of collar to top of collar.

Elevation View

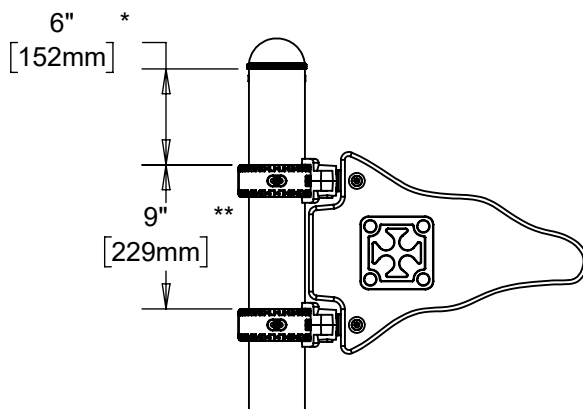


FIGURE 2
Triangle Flag

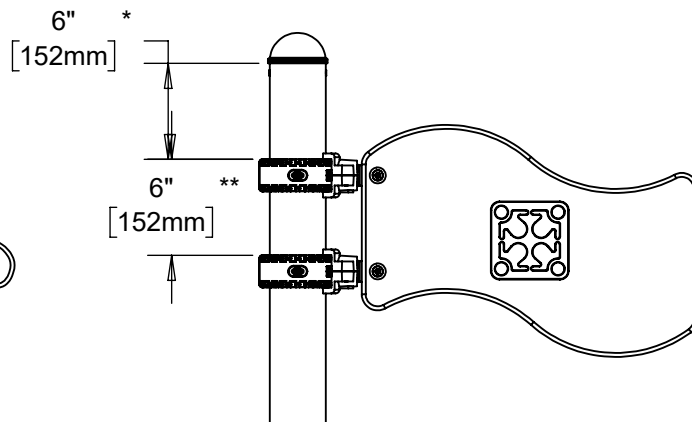


FIGURE 3
Rectangle Flag

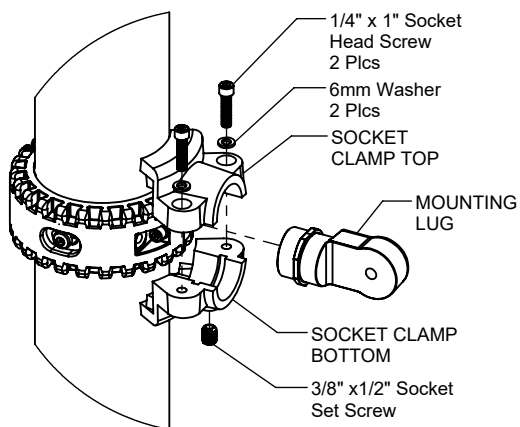


Figure 1.1

Step 3

Attach Flag to Mounting Lugs as shown in Figure 1.2. (See Note A)

Step 4

Fully tighten all fasteners according to the "TIGHTENING TORQUE FOR HARDWARE" section of the Installation Manual.

Step 2

Attach Socket Clamps and Mounting Lugs to Collars as shown in Figure 1.1. (See Notes A & B)

NOTE: 2 Places

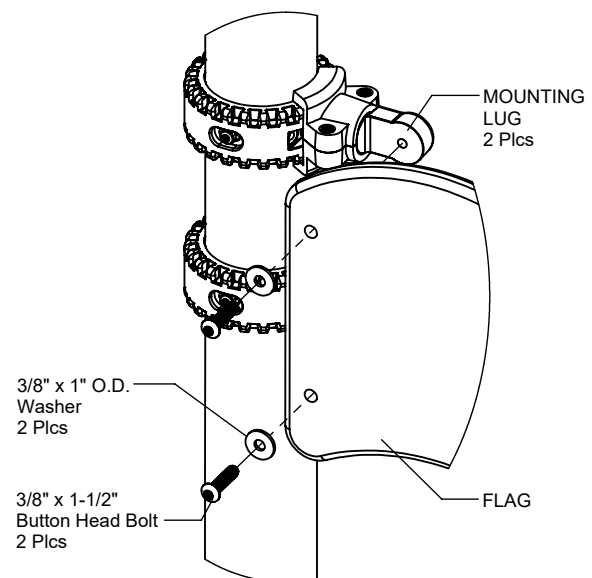


Figure 1.2

FLAG ON POST ASSEMBLY INSTALLATION INSTRUCTIONS

1820
Page 3 of 3

Parts List R5

R5 TRIANGLE FLAG		
Part #	DESCRIPTION	QTY
EE-4739	Sailboat Flag	1
GF-7007	Mounting Lug R5	2
HS-1001-R5	Socket Clamp Set R5	2
9103072-TR	Bolt Button Head 3/8" x 1-1/2"	2
9333002	Washer Flat 3/8" x 1" O.D. x .100" thick	2

R5 RECTANGLE FLAG		
Part #	DESCRIPTION	QTY
EE-4618	Ship Flag With Logo	1
GF-7007	Mounting Lug R5	2
HS-1001-R5	Socket Clamp Set R5	2
9103072-TR	Bolt Button Head 3/8" x 1-1/2"	2
9333002	Washer Flat 3/8" x 1" O.D. x .100" thick	2

Parts List R3.5

R3.5 TRIANGLE FLAG		
Part #	DESCRIPTION	QTY
EE-4739	Sailboat Flag	1
GG-8113	Mounting Lug R3.5	2
HS-1001-R35	Socket Clamp Set R3.5	2
9103072-TR	Bolt Button Head 3/8" x 1-1/2"	2
9333002	Washer Flat 3/8" x 1" O.D. x .100" thick	2

R3.5 RECTANGLE FLAG		
Part #	DESCRIPTION	QTY
EE-4618	Ship Flag With Logo	1
GG-8113	Mounting Lug R3.5	2
HS-1001-R35	Socket Clamp Set R3.5	2
9103072-TR	Bolt Button Head 3/8" x 1-1/2"	2
9333002	Washer Flat 3/8" x 1" O.D. x .100" thick	2

Specifications

FLAG:

Shall be made from high density 3/4" sheet plastic specially formulated for optimum UV stability and color retention.

MOUNTING LUGS:

Shall be precision die-cast from a high-strength aluminum alloy. The Mounting Lugs have a multi-stage baked-on powder coat finish.

SOCKET CLAMPS:

Shall be two-part and precision die-cast from a high strength aluminum alloy. The Socket Clamps have a multi-stage baked-on powder coat finish.

HARDWARE:

Shall be stainless steel, zinc/nickel plated or galvanized as required to resist rust and corrosion.

Maintenance

Periodically tighten all screws, bolts and nuts. A periodic inspection of all parts is necessary. If a part is broken or worn, replace immediately. For general maintenance please refer to our Playground Maintenance Manual.



www.playcraftsystems.com
For Customer Service Call
800.333.8519 (U.S.A.) or 541.955.9199 (International)

Rev D
8/5/2019