


## IMPORTANT NOTES: Read First

- (A) Use liquid thread lock (such as Loctite®) with all threaded hardware. **Important:** Liquid thread lock (prior to curing) helps to eliminate the common problem of "thread seizure" in stainless steel hardware by serving as a lubricant during assembly.
- (B) Do not pour concrete until the equipment is completely assembled, leveled and plumbed. Concrete must be allowed to cure completely before using the equipment (at least 72 hours).
- (C) Refer to Installation Manual for 1309 Half Wall installation instructions.
- (D) An appropriate energy absorbing safety surface is required under and around all playground equipment. Loose fill protective surfacing is shown only as an example for the purpose of this assembly instruction. Other surfacing material may vary in thickness and/or compression depths. See free publication - The Handbook for Public Playground Safety, Publication #325 at [www.cpsc.gov](http://www.cpsc.gov) for the surfacing appropriate for the fall height of the equipment or consult your surfacing supply representative.

**FIGURE 1**  
Climb-Across Net Bridge

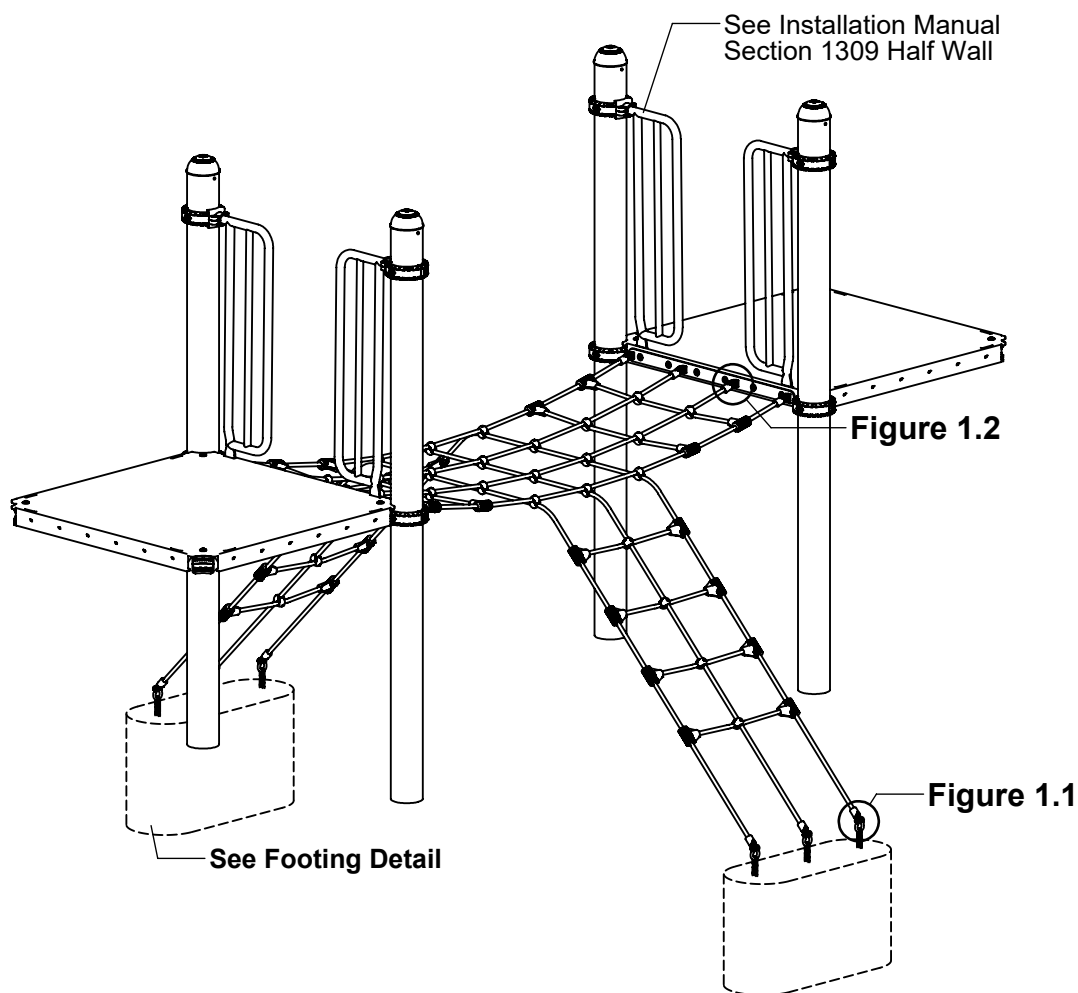

**NOTE:** R5 Climb-Across Net Bridge shown. Other configurations will vary slightly, but does not affect assembly.


## Step 1

Refer to Footing Layout and mark footing hole locations. Dig (2) 12" x 32" oval footing holes. Refer to Footing Detail for depth and details.


**IMPORTANT:** For areas with soft soil conditions, larger footings may be required.

\* Footing depth must be adjusted to compensate for the depth/thickness requirements of selected safety surfacing. See Section 06.1 of the Installation Manual.

### Footing Detail

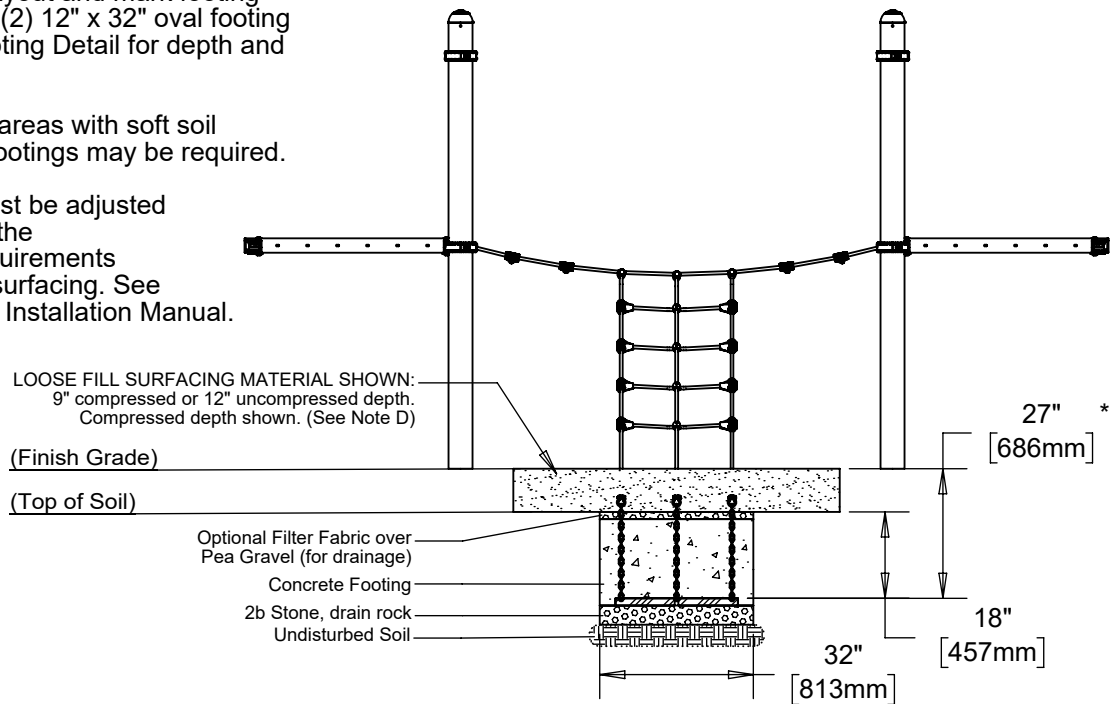

### Top View - Footing Layout

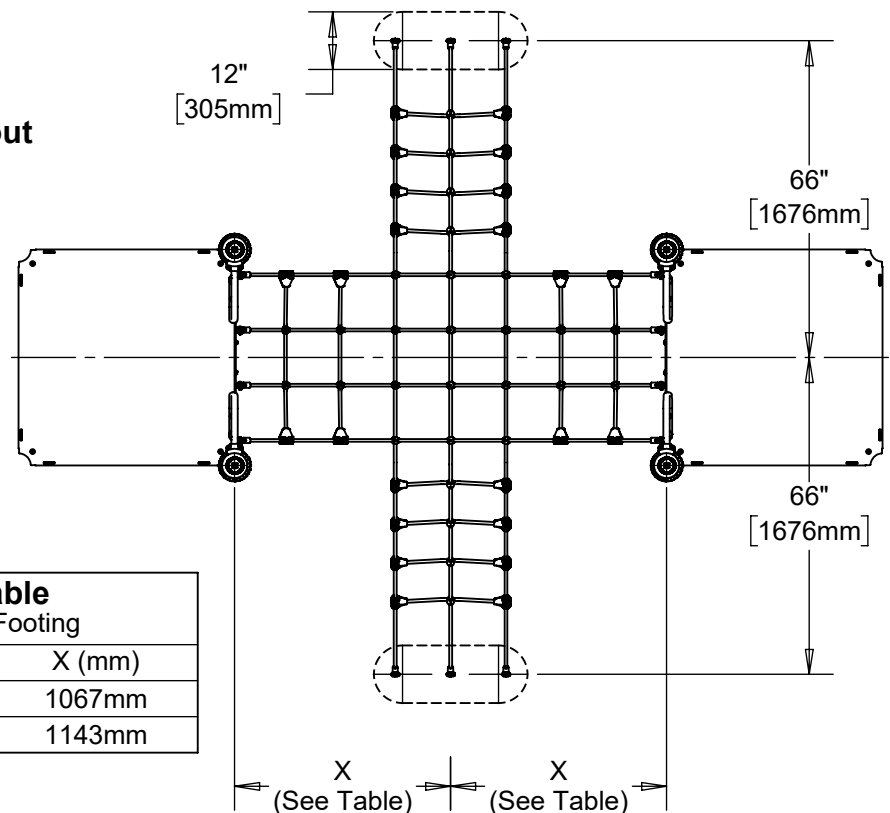

#### Footing Distance Table


Center of Post to Center of Footing

Assembly	X (in.)	X (mm)
R3.5	42"	1067mm
R5	45"	1143mm


## Step 2

Attach Chains to Climb-Across Net as shown in Figure 1.1. (See Note A).

**NOTE:** 6 Places

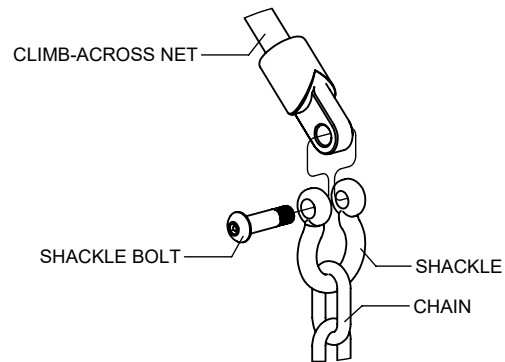

**Figure 1.1**

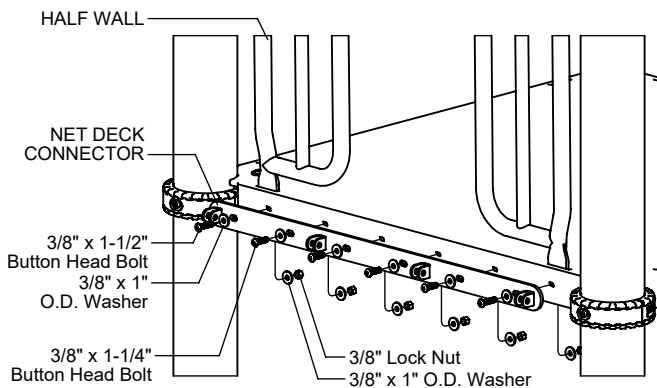

**FIGURE 2**

## Step 3

Attach Half Walls to posts and Net Deck Connectors to decks as shown in Figure 2. (See Notes A & C)

**NOTE:** Use (4) 3/8" x 1-1/2" Button Head Bolts included with Climb-Across Net Bridge assembly.

**NOTE:** 2 Places

## Step 4

Attach Climb-Across Net to Net Deck Connectors as shown in Figure 1.2. (See Note A)

**NOTE:** 8 Places

## Step 5


Fully tighten all fasteners according to the "TIGHTENING TORQUE FOR HARDWARE" section of the Installation Manual.

## Step 6

Place Chains into footing holes and adjust Climb-Across Net Bridge to desired tautness. Secure Chains, plumb and level entire component. Pour concrete into footing holes. Allow at least 72 hours to cure before using this equipment. (See Note B)

## Step 7

Place required protective surfacing under and around Climb-Across Net Bridge. (See Note D)

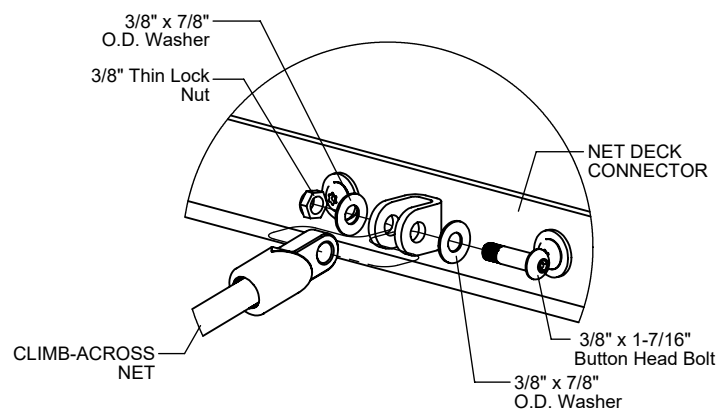

**Figure 1.2**

# CLIMB-ACROSS NET BRIDGE

## INSTALLATION INSTRUCTIONS

**1526**  
Page 4 of 4

### Parts List

Part #	DESCRIPTION	QTY
FS-1526	Climb-Across Net Deck Connector	2
HE-0008-16	16-Link Galvanized Chain	6
Varies	Climb-Across Net	1
451161-SS	Swing Shackle - Stainless Steel	6
9103062-TR	Bolt Button Head 3/8" x 1-1/4"	8
9103072-TR	Bolt Button Head 3/8" x 1-1/2"	4
9103200-TR	Bolt Button Head 3/8" x 1-7/16"	8
9333002	Washer Flat 3/8" x 1" O.D. x .100" thick	24
9333042	Washer Flat 3/8" x 7/8" O.D.	16
9413002	Nut Lock 3/8"	12
9423002	Nut Lock Thin 3/8"	8

### Specifications

#### 16-LINK GALVANIZED CHAIN:

Shall be 5/0 galvanized low-carbon steel chain with silver shield finish.

#### CLIMB-ACROSS NET:

Shall be made from 16mm steel-reinforced rope with high-strength copolymer plastic intersection connectors and machined aluminum end ferrules.

#### CLIMB-ACROSS NET DECK CONNECTOR:

Shall be fabricated using 1/4" sheet steel with welded 3/16" thick steel anchors. The Climb-Across Net Deck Connector shall have a multi-stage baked-on powder coat finish.

#### HARDWARE:

Shall be stainless steel, zinc/nickel plated or galvanized as required to resist rust and corrosion.

### Maintenance

Periodically tighten all screws, bolts and nuts. A periodic inspection of all parts is necessary. If a part is broken or worn, replace immediately. For general maintenance please refer to our Playground Maintenance Manual.



www.playcraftsystems.com  
For Customer Service Call  
800.333.8519 (U.S.A.) or 541.955.9199 (International)

**Rev E**  
8/20/2019