
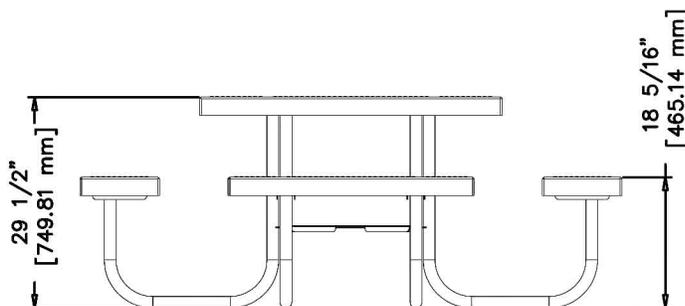


## IMPORTANT NOTES: Read First


(A) Use liquid thread lock (such as Loctite) with all threaded hardware. **Important:** Liquid thread lock (prior to curing) helps to eliminate the common problem of "thread seizure" in stainless steel hardware by serving as a lubricant during assembly.

## Assembly View

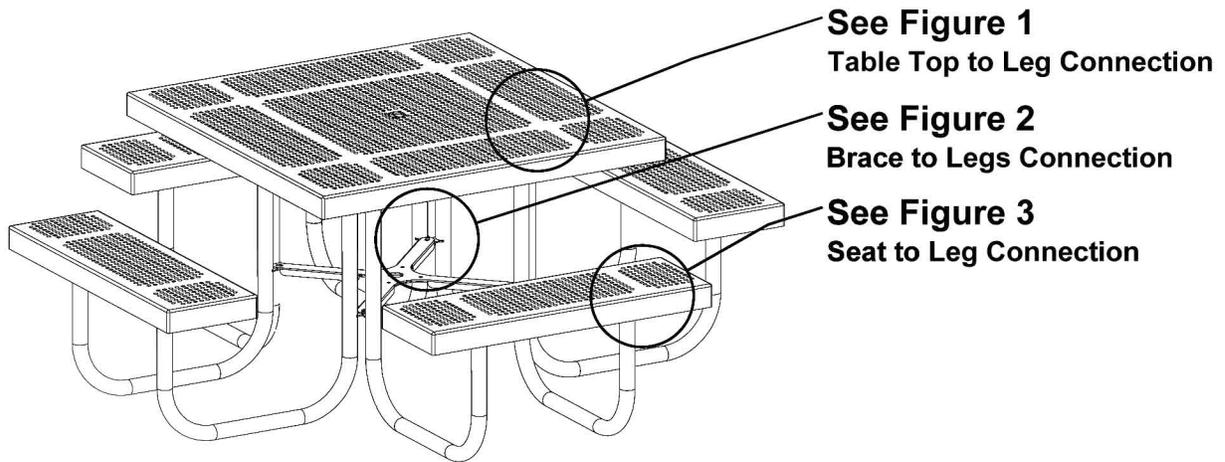

## Elevation

Side View

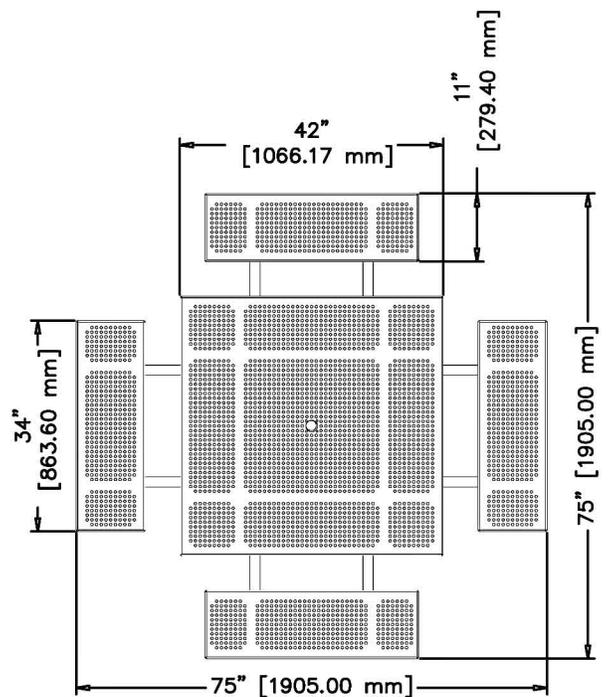

## Plan View

Top View




Manufactured by Krauss Craft, Inc.  
www.playcraftsystems.com

For Customer Service Call  
800.333.8519 (U.S.A.) or  
541.955.9199 (International)

**Rev D**


## Figure 1

### Table Top to Leg Connection

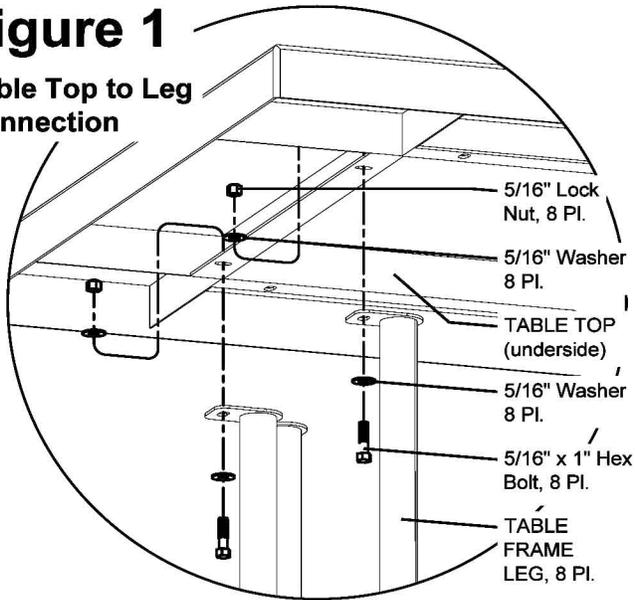


## Figure 2

### Brace to Legs Connection

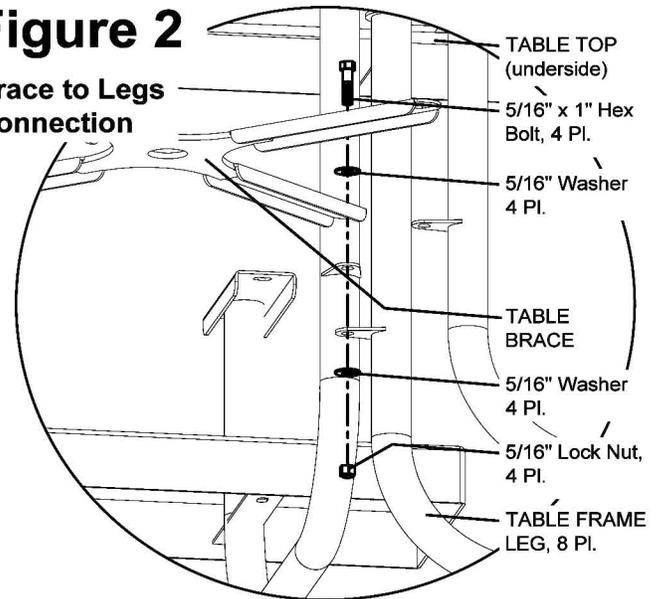

## Figure 3

### Seat to Leg Connection

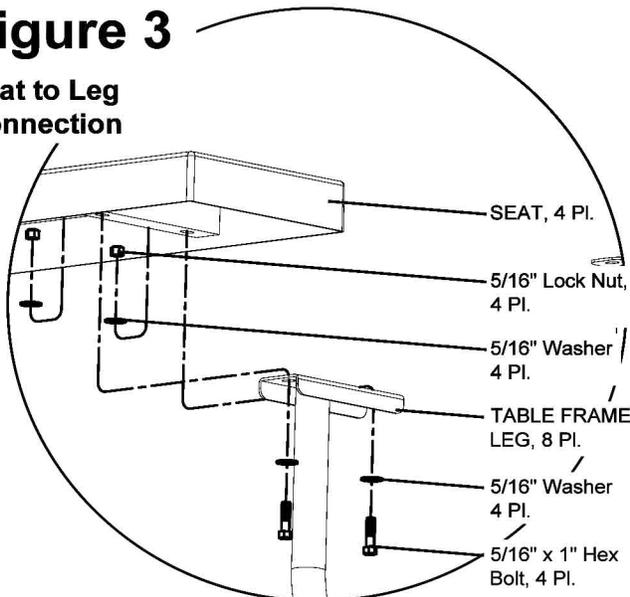

## Parts List

<u>PART #</u>	<u>DESCRIPTION</u>	<u>QTY.</u>
005045	Square Picnic Table Top	1
005046	Square Picnic Seat	4
005048	Square Table Brace (PVC)	1
FS-5047	Square Picnic Table Frame Leg	8
9122052	Bolt Hex 5/16" x 1"	28
9332002	Washer Flat 5/16"	56
9412182	Nut Lock 5/16"	28

## Installation

### Step 1.

Attach Table Top to Table Frame Legs. Refer to Figure 1 for hardware type and orientation.

### Step 2.

Attach Square Table Brace to Table Frame Legs. Refer to Figure 2 for hardware type and orientation.

### Step 3.

Attach Seat to Table Frame Leg. Refer to Figure 3 for hardware type and orientation.

### Step 4.

Apply liquid thread lock and fully tighten all fasteners according to the "TIGHTENING TORQUE FOR HARDWARE" Section of the Installer's Manual. See Note A.

## Specifications

### BENCH & TABLE TOP:

Shall be 14 gage sheet steel punched and formed into the desired shape. The Bench and Table Top shall be Play-Tuff™ coated after fabrication.

### SQUARE TABLE FRAME LEG:

Shall be 1.660" O.D., 11 Ga. steel tubing bent into shape with welded 10 Ga. end brackets. The Square Table Frame has a multi-stage baked-on powder coat finish.

### SQUARE TABLE BRACE:

Shall be made of 10 Ga. sheet steel bent into shape. The Square Table Brace shall be Play-Tuff™ coated after fabrication.

### HARDWARE:

Shall be stainless steel, zinc/nickel plated or galvanized as required to resist rust and corrosion.

## Maintenance

Periodically tighten all screws, bolts and nuts. A periodic inspection of all parts is necessary. If a part is broken or worn, replace immediately. For general maintenance please refer to our Playground Maintenance Manual.

