


**IMPORTANT NOTES: Read First**

(A) Use liquid thread lock (such as Loctite®) with all threaded hardware. **Important:** Liquid thread lock (prior to curing) helps to eliminate the common problem of "thread seizure" in stainless steel hardware by serving as a lubricant during assembly.

(B) Refer to Installation Manual for 1107 Curved Deck & 1327 Access Wall installation instructions.

(C) An appropriate energy absorbing safety surface is required under and around all playground equipment. Loose fill protective surfacing is shown only as an example for the purpose of this assembly instruction. Other surfacing material may vary in thickness and/or compression depths. See free publication - The Handbook for Public Playground Safety, Publication #325 at [www.cpsc.gov](http://www.cpsc.gov) for the surfacing appropriate for the fall height of the equipment or consult your surfacing supply representative.

**FIGURE 1**  
Curved Deck Climber Adapter


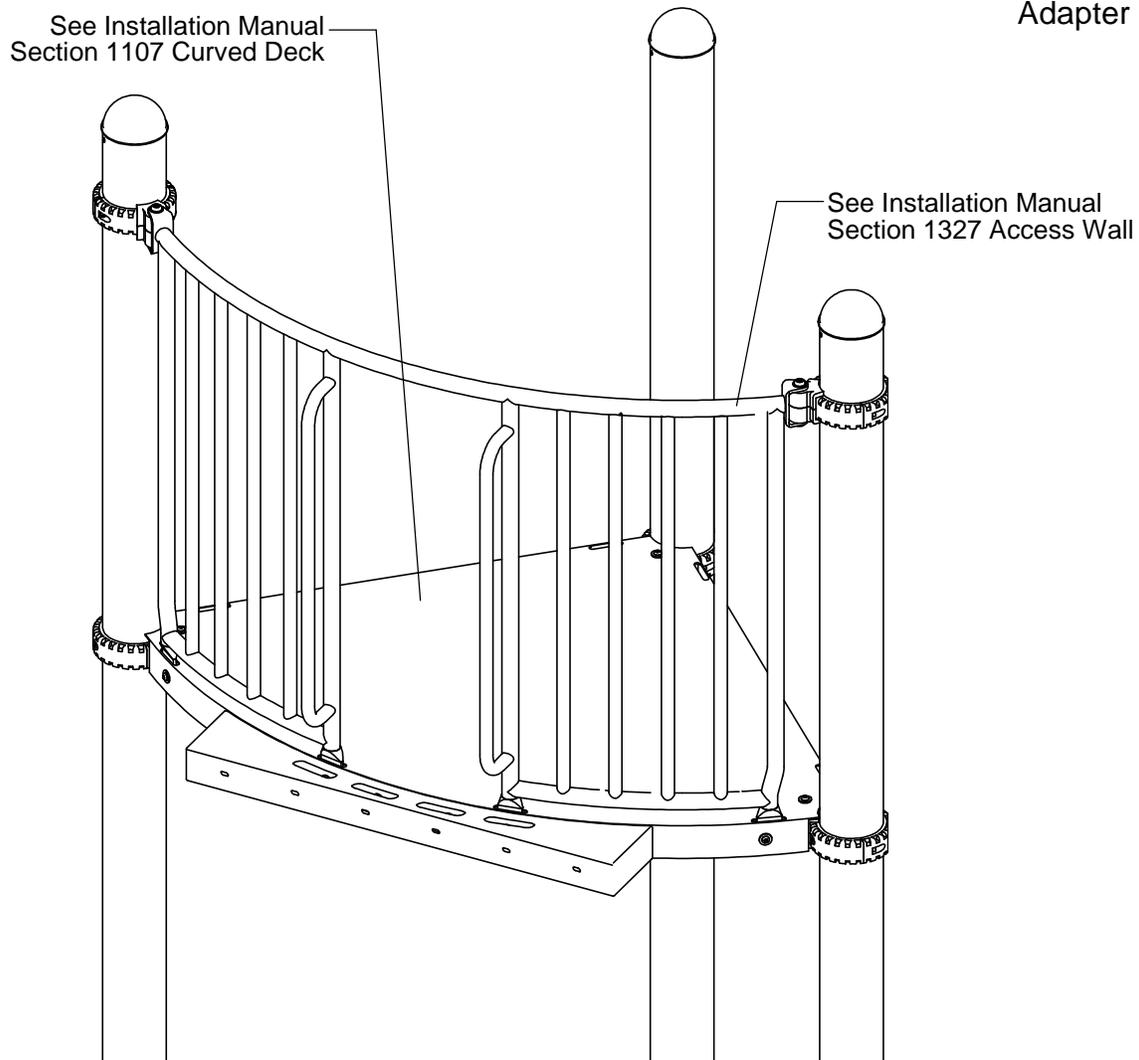


**NOTE:** R5 Curved Deck Climber Adapter shown. Other configurations will vary slightly, but does not affect assembly.

# Step 1

Install Curved Deck. (See Note B)

<b>Footing Distance Table</b> Center of Post to Face of Adapter		
Assembly	X (in.)	X (mm)
R3.5	14-13/16	376
R5	15-11/16	398

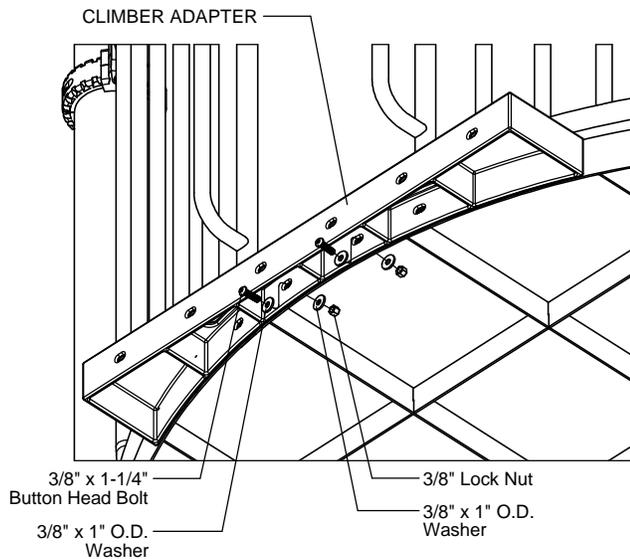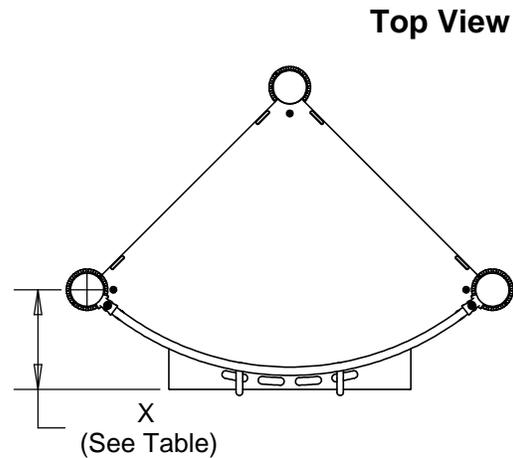

**FIGURE 2**

# Step 2

Refer to Top View and adjust footing hole location(s) provided in attaching component's installation instructions by the distance given. (See Examples on Page 3)

# Step 3

Align Adapter face to deck face and attach as shown in Figure 2. (See Note A)

# Step 4

Attach Access Wall to deck. Complete attaching Adapter to deck face as shown in Figure 3. (See Notes A & B)


**NOTE:** Use (2) 3/8" x 1-1/2" Button Head Bolts included with Curved Deck Climber Adapter assembly.

# Step 5

Fully tighten all fasteners according to the "TIGHTENING TORQUE FOR HARDWARE" section of the Installation Manual.


# Step 6

Place required protective surfacing under and around Curved Deck Climber Adapter. (See Note C)

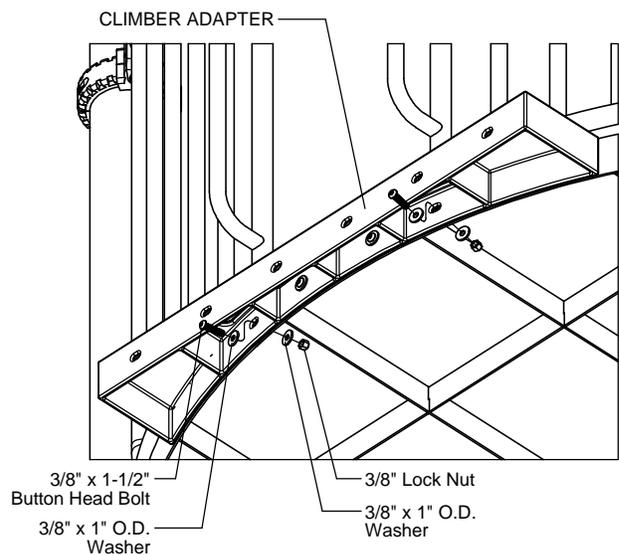


**FIGURE 3**


**Example One  
R3.5 Chain Net Climber**

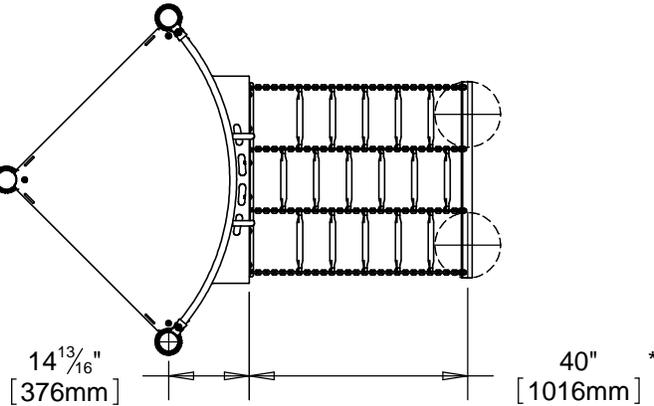


**Example Two  
R3.5 Free Form Climber**

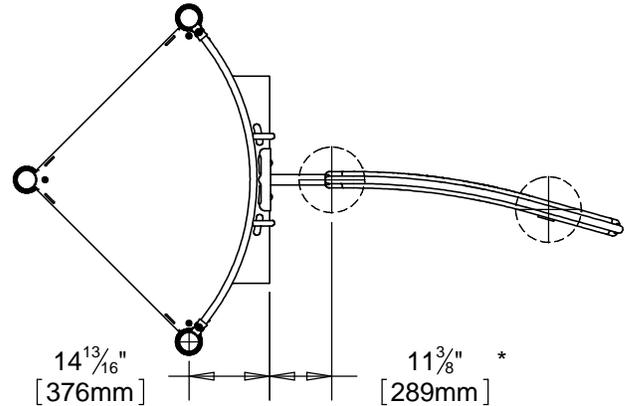

**Example Three  
R5 Centipede Climber**

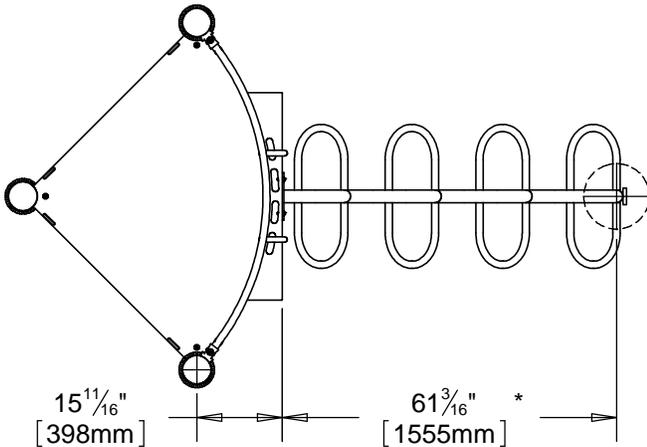

**Example Four  
R5 Deep Rung Climber**

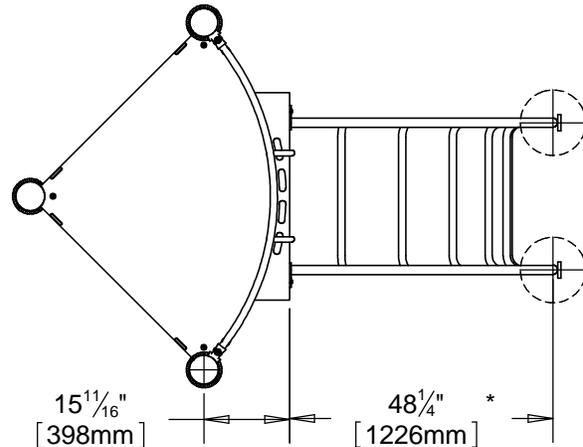

\* Distance given in attaching component's installation instructions.

### R3.5 Parts List

Part #	DESCRIPTION	QTY
CG-0258	Curved Deck Climber Adapter R3.5	1
9103062-TR	Bolt Button Head 3/8" x 1-1/4"	2
9103072-TR	Bolt Button Head 3/8" x 1-1/2"	2
9333002	Washer Flat 3/8" x 1" O.D. x .100" thick	8
9413002	Nut Lock 3/8"	4

### R5 Parts List

Part #	DESCRIPTION	QTY
CF-0112	Curved Deck Climber Adapter R5	1
9103062-TR	Bolt Button Head 3/8" x 1-1/4"	2
9103072-TR	Bolt Button Head 3/8" x 1-1/2"	2
9333002	Washer Flat 3/8" x 1" O.D. x .100" thick	8
9413002	Nut Lock 3/8"	4

### Specifications

**CURVED DECK CLIMBER ADAPTER:**  
Shall be fabricated using 12 gauge sheet steel. The Curved Deck Climber Adapter shall be Play-Tuff™ coated after fabrication.

**HARDWARE:**  
Shall be stainless steel, zinc/nickel plated or galvanized as required to resist rust and corrosion.

### Maintenance

Periodically tighten all screws, bolts and nuts. A periodic inspection of all parts is necessary. If a part is broken or worn, replace immediately. For general maintenance please refer to our Playground Maintenance Manual.



Manufactured by Krauss Craft, Inc.  
www.playcraftsystems.com

For Customer Service Call  
800.333.8519 (U.S.A.) or  
541.955.9199 (International)

**Rev A**  
6/28/2011