


IMPORTANT NOTES: Read First

(A) Use liquid thread lock (such as Loctite®) with all threaded hardware. **Important:** Liquid thread lock (prior to curing) helps to eliminate the common problem of "thread seizure" in stainless steel hardware by serving as a lubricant during assembly.

FIGURE 1
Small Bubble Panel

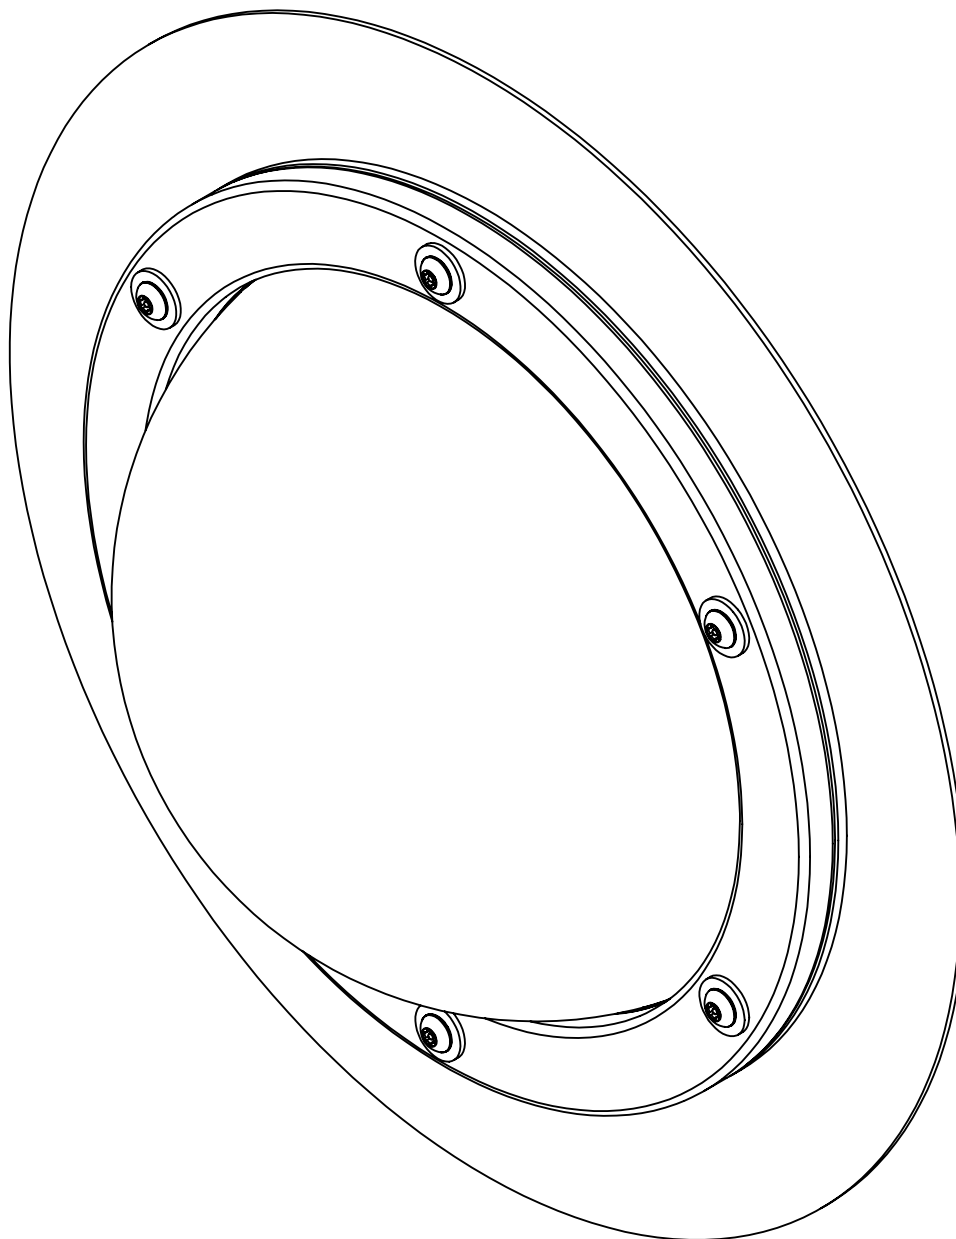

NOTE: Small Bubble Panel to steel panel shown. Other configurations will vary slightly, but does not affect assembly.

Step 1a

For Steel Event Panel Only

Attach Bubble and Trim to Steel Event Panel as shown in Figure 2. (See Note A)

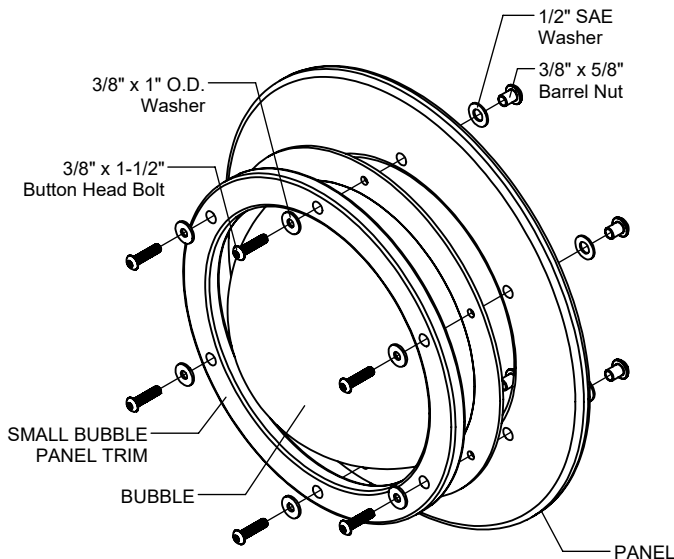


FIGURE 3

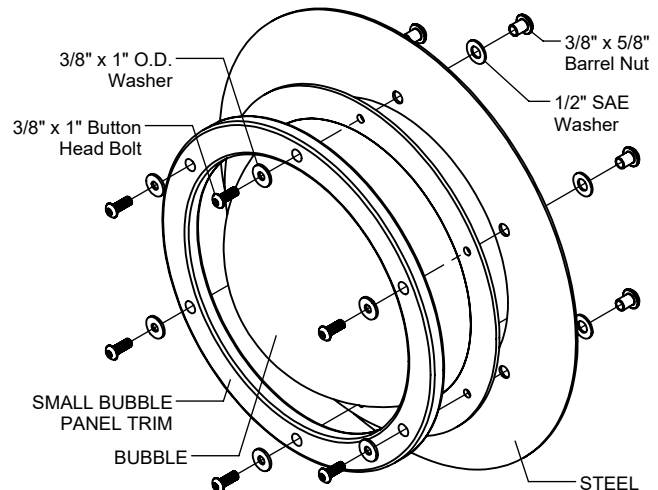


FIGURE 2

Step 1b

For HDPE Event Panel Only

Attach Bubble and Trim to HDPE Event Panel as shown in Figure 3. (See Note A)

Step 2

Fully tighten all fasteners according to the "TIGHTENING TORQUE FOR HARDWARE" section of the Installation Manual.

Parts List

STEEL MOUNT		
Part #	DESCRIPTION	QTY
DE-0010	Bubble 16"	1
EE-0682	Small Bubble Panel Trim	1
9103052-TR	Bolt Button Head 3/8" x 1"	6
9333002	Washer Flat 3/8" x 1" O.D. x .100" thick	6
9345002	Washer Flat SAE 1/2"	6
9443022-TR	Nut Barrel 3/8" x 5/8" BH	6

HDPE MOUNT		
Part #	DESCRIPTION	QTY
DE-0010	Bubble 16"	1
EE-0682	Small Bubble Panel Trim	1
9103072-TR	Bolt Button Head 3/8" x 1-1/2"	6
9333002	Washer Flat 3/8" x 1" O.D. x .100" thick	6
9345002	Washer Flat SAE 1/2"	6
9443022-TR	Nut Barrel 3/8" x 5/8" BH	6

Specifications

SMALL BUBBLE PANEL TRIM:

Shall be made from high density 3/4" sheet plastic specially formulated for optimum UV stability and color retention.

SMALL BUBBLE PANEL:

Shall be made from polycarbonate.

HARDWARE:

Shall be stainless steel, zinc/nickel plated or galvanized as required to resist rust and corrosion.

Maintenance

Periodically tighten all screws, bolts and nuts. A periodic inspection of all parts is necessary. If a part is broken or worn, replace immediately. For general maintenance please refer to our Playground Maintenance Manual.